


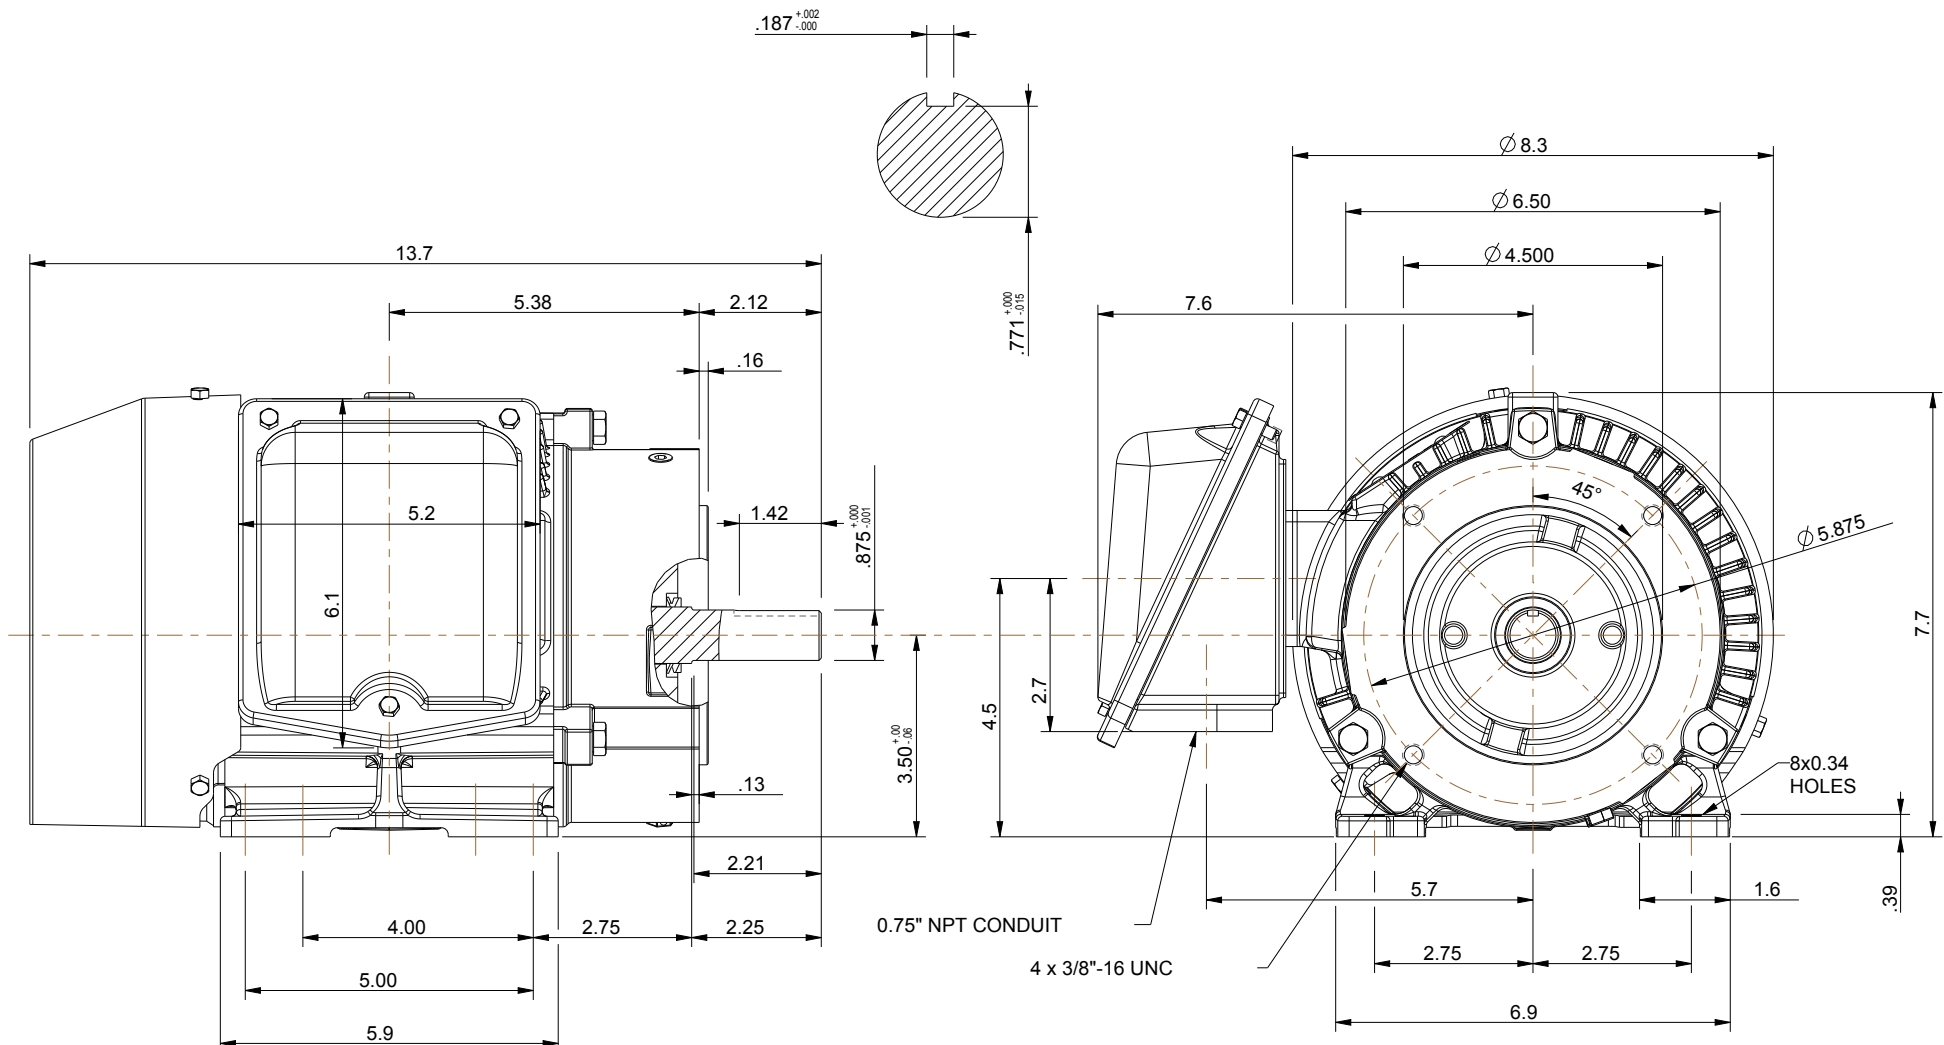

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
  2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
  3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.188" x 0.188" x 1.38"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

|                                                     |                                                                   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |                                                                                                                                    |
|-----------------------------------------------------|-------------------------------------------------------------------|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|--|------------------------------------------------------------------------------------------------------------------------------------|
| <b>140TC NEMA-BA TEFC FRAME<br/>F1 ASSEMBLY</b>     | <b>TOLERANCES</b><br>.X .1<br>.XX .03<br>.XXX .005<br>.XXXX .0005 |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  | <div data-bbox="1638 1323 2047 1469">  </div> |
| MDSL049-01                                          | <b>MAXIMUM<br/>MOTOR WEIGHT</b><br>56 lbs.<br>25 kgs.             |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |                                                                                                                                    |
| <b>TOSHIBA</b><br>TOSHIBA INTERNATIONAL CORPORATION |                                                                   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |                                                                                                                                    |
|                                                     |                                                                   |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |  |                                                                                                                                    |

# TYPICAL MOTOR PERFORMANCE DATA

Model: 0014XSSB47A-P

| HP        | kW   | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|------|------------|--------|-------|----------------|-------------|----------|--------------|
| 1         | 0.75 | 4          | 1760   | 143TC | 460            | 60          | 3        | 1.70         |
| Enclosure | IP   | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 55   | F          | 1.15   | CONT  | 85.5           | B           | N        | 40 C         |

| Load         | HP   | kW  | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load    | 1    | 0.7 | 1.7     | 85.5           | 69.5             |
| ¾ Load       | 0.75 | 0.6 | 1.4     | 83.7           | 57.2             |
| ½ Load       | 0.50 | 0.4 | 1.2     | 79.1           | 48.8             |
| ¼ Load       | 0.25 | 0.2 | 1.1     | 66.5           | 29.9             |
| No Load      |      |     | 1.1     |                |                  |
| Locked Rotor |      |     | 15.00   |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 2.98              | 340                  | 295             | 490                | 0.11                       |

| Safe Stall Time(s) |      | Sound Pressure dB(A) @ 1M | Bearings* |          | Approx. Motor Weight (lbs) |
|--------------------|------|---------------------------|-----------|----------|----------------------------|
| Cold               | Hot  |                           | DE        | NDE      |                            |
| 34.9               | 30.6 | -                         | 6305ZZC3  | 6305ZZC3 |                            |

\*Bearings are the only recommended spare part(s).

## Motor Options:

Mounting:C-Face Footed,Shaft:T Shaft

|             |  |  |
|-------------|--|--|
| Customer    |  |  |
| Customer PO |  |  |
| Sales Order |  |  |
| Project #   |  |  |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## SPEED TORQUE/CURRENT CURVE

Model: 0014XSSB47A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 1                 | 0.75                                                | 4                 | 1760             | 143TC       | 460            | 60             | 3        | 1.70         |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 55                                                  | F                 | 1.15             | CONT        | 85.5           | B              | N        | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 15.00             | 0.11                                                | 2.98              | 340              | 295         |                | 490            |          |              |

### Design Values

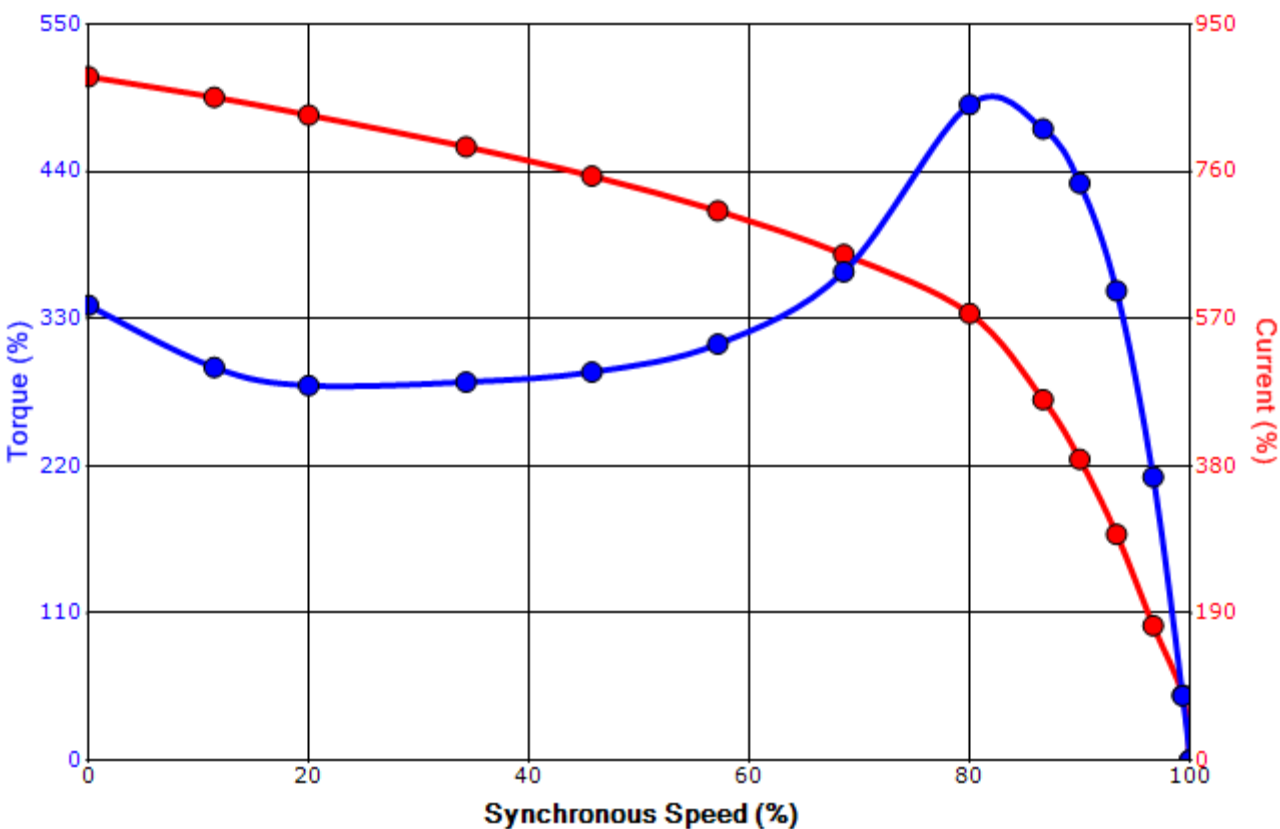

|             |  |                                                    |     |
|-------------|--|----------------------------------------------------|-----|
| Customer    |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  | Load Type                                          | -   |
| Sales Order |  | Voltage (%)                                        | 100 |
| Project #   |  | Accel. Time                                        | -   |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## Motor Connection Diagram

### 3 Leads - Wye Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.