

Ordering Data

How to construct a catalog number for Prismalume

Fixture type _____

EXAMPLE: PRSL — 400HP — 12 — PD — M35 — F1
 1 2 3 4 5 6

Fill in _____
 cat. no.: 1 2 3 4 5 6

Catalog no.	Description
-------------	-------------

1 Luminaire

- PRSL Prismalume
- PS Prismalume

2 Source and wattage

- PRSL**
- 15AHP 150W/55V HPS
 - 25LHP 250W HPS, energy saving ballast
 - 250HP 250W HPS
 - 40LHP 400W HPS, energy saving ballast
 - 400HP 400W HPS
 - 175MP¹ 175W MH, protected lamp
 - 250MP¹ 250W MH, protected lamp
 - 250PP¹ 250W MH, pulse start, protected lamp
 - 25LMP¹ 250W MH, protected lamp, energy saving ballast
 - 25LPP¹ 250W MH, pulse start, protected lamp, energy saving ballast
 - 320PP¹ 320W MH, pulse start, protected lamp
 - 350PM 350W MH, pulse start
 - 35LPM 350W MH, pulse start, energy saving ballast
 - 400MH 400W MH
 - 40LMH 400W MH, energy saving ballast
 - 400PM 400W MH, pulse start
 - 40LPM 400W MH, pulse start, energy saving ballast
- PS**
- 750HP 750W HPS (not available with MT, VT)
 - 750PM 750W MH, pulse start
 - CP1HP 1000W HPS, compact lamp
 - C10HP 1000W HPS
 - 40RMH 400W MH, Mag Reg (not available with MT, VT)
 - C10MH 1000W MH

3 Voltage

- 12 120 volt
- 20 208 volt
- 24 240 volt
- 27 277 volt
- 34 347 volt
- 48 480 volt
- MT Multi-voltage (120 - 277V USA)
- VT Vari-tap (120, 277, 347V Canada and 250HP, 400HP, 400MH only)

4 Mounting

- | | | |
|-----------------------------|----------------------------|--|
| PRSL | PS | |
| <input type="checkbox"/> PD | <input type="checkbox"/> P | Pendant mount for .75" NPT conduit |
| <input type="checkbox"/> QD | <input type="checkbox"/> Q | Quick disconnect power hanger for pendant and thru-way wiring. Not available with "CDP", "PHCB" or "PF". |
| <input type="checkbox"/> ND | <input type="checkbox"/> N | No quick disconnect power hanger for pendant and thru-way wiring |

5 Optics


Select reflector catalog no. from matrix on page 7 for desired spacing and wattage

6 Options and Accessories

See pages 14 and 15 for available options and accessories.

Note: ¹ These fixtures use sockets that accept open fixture rated lamps only. Standard mogul base lamps are not compatible.

Order number _____ Job name _____

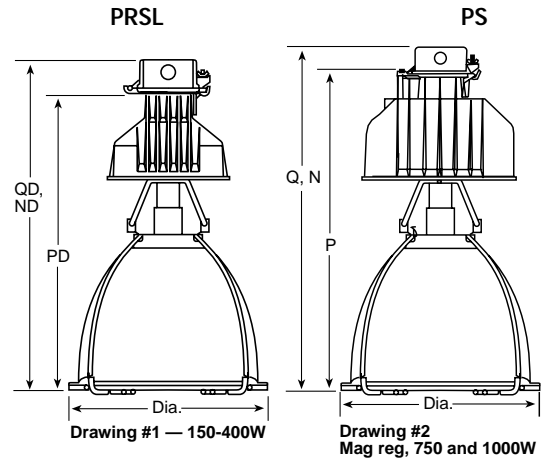

Drawing #1

Optics	Reflector	Diameter mm (in.)	PD mm (in.)	QD, ND mm (in.)
31	PRSL31	400 (15.90)	640 (25.15)	700 (27.55)
35	PRSL35A	400 (15.90)	640 (25.15)	700 (27.55)
37	PRSL37	410 (16.15)	610 (24)	670 (26.40)
39	PRSL39	480 (18.90)	630 (24.55)	690 (26.95)
40	PRSL40	560 (21.90)	630 (24.55)	690 (26.95)
50	PRSL50	690 (26.95)	780 (30.65)	840 (33.05)

Drawing #2

Optics	Reflector	Diameter mm (in.)	P mm (in.)	Q, N mm (in.)
31	PRSL31	400 (15.90)	710 (28.10)	770 (30.50)
35	PRSL35A	400 (15.90)	710 (28.10)	770 (30.50)
37	PRSL37	410 (16.15)	680 (26.60)	740 (29)
39	PRSL39	480 (18.90)	700 (27.55)	760 (29.95)
40	PRSL40	560 (21.90)	700 (27.55)	760 (29.95)
50	PRSL50	690 (26.95)	850 (33.60)	910 (36)

PRI SMALUME[®]