

0.75" NPT CONDUIT

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
 2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
 3. KEY DIMENSIONS EQUAL 0.188" x 0.188" x 1.38" (MOTOR SUPPLIED WITH KEY)

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

| | | | | | | | | | | |
|---|--|--|----------|----------|-------|--|--|--|--|--|
| 140TC TEXP FRAME F1 C-FLANGE ASSEMBLY | TOLERANCES | | | | | | | | | |
| | .X .1 .XX .03 .XXX .005 .XXXX .0005 | | | | | | | | | |
| MDSL802-01 | MAXIMUM MOTOR WEIGHT | | | | | | | | | |
| TOSHIBA TOSHIBA INTERNATIONAL CORPORATION | 77 lbs. | | | | | | | | | |
| | 35 kgs. | 0 FIRST ISSUE (OVERRIDE D, R, & S DIMS.) | MO | 03/14/14 | JR | | | | | |
| | | NO REVISION | DRAWN BY | DATE | CHECK | | | | | |
| | | | | | | EQP Global XP XT SERIES DRAWN BY: M. O'DOWD CHECK BY: J. RUSSELL APPROVED BY: www.toshiba.com/ind | | | | |

TYPICAL MOTOR PERFORMANCE DATA

Model: 0024XPEC42A-P

| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
|-----------|-----|------------|--------|-------|----------------|-------------|----------|--------------|
| 2 | 1.5 | 4 | 1750 | 145TC | 575 | 60 | 3 | 2.40 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 55 | F | 1.15 | CONT | 86.5 | B | K | 40 C |

| Load | HP | kW | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|------|-----|---------|----------------|------------------|
| Full Load | 2 | 1.5 | 2.4 | 86.5 | 74.7 |
| ¾ Load | 1.50 | 1.1 | 1.8 | 86.1 | 67.6 |
| ½ Load | 1.00 | 0.7 | 1.5 | 83.5 | 55.3 |
| ¼ Load | 0.50 | 0.4 | 0.9 | 79.5 | 48.1 |
| No Load | | | 1.4 | | 7.5 |
| Locked Rotor | | | 18.00 | | 67.6 |

| Torque | | | | Rotor wk ² Inertia (lb-ft ²) |
|-------------------|----------------------|-----------------|--------------------|---|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) | |
| 6 | 255 | 225 | 390 | 0.13 |

| Safe Stall Time(s) | | Sound Pressure dB(A) @ 1M | Bearings* | | Approx. Motor Weight (lbs) |
|--------------------|-----|---------------------------|-----------|----------|----------------------------|
| Cold | Hot | | DE | NDE | |
| 27 | 20 | - | 6305ZZC3 | 6305ZZC3 | |

*Bearings are the only recommended spare part(s).

Motor Options:
Mounting:C-Face Footed,Shaft:T Shaft

| | |
|-------------|--|
| Customer | |
| Customer PO | |
| Sales Order | |
| Project # | |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.


| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | jhock | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date | 6/11/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

SPEED TORQUE/CURRENT CURVE

Model: 0024XPEC42A-P

| | | | | | | | | |
|-------------------|---|-------------------|------------------|-------------|----------------|-------------|----------|----------------|
| HP | kW | Pole | FL RPM | Frame | Voltage | Hz | Phase | FL Amps |
| 2 | 1.5 | 4 | 1750 | 145TC | 575 | 60 | 3 | 2.40 |
| Enclosure | IP | Ins. Class | S.F. | Duty | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC | 55 | F | 1.15 | CONT | 86.5 | B | K | 40 C |
| Locked Rotor Amps | Rotor wk ² Inertia (lb-ft ²) | Torque | | | | | | Break Down (%) |
| | | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) | | | | |
| 18.00 | 0.13 | 6 | 255 | 225 | | | 390 | |

Design Values

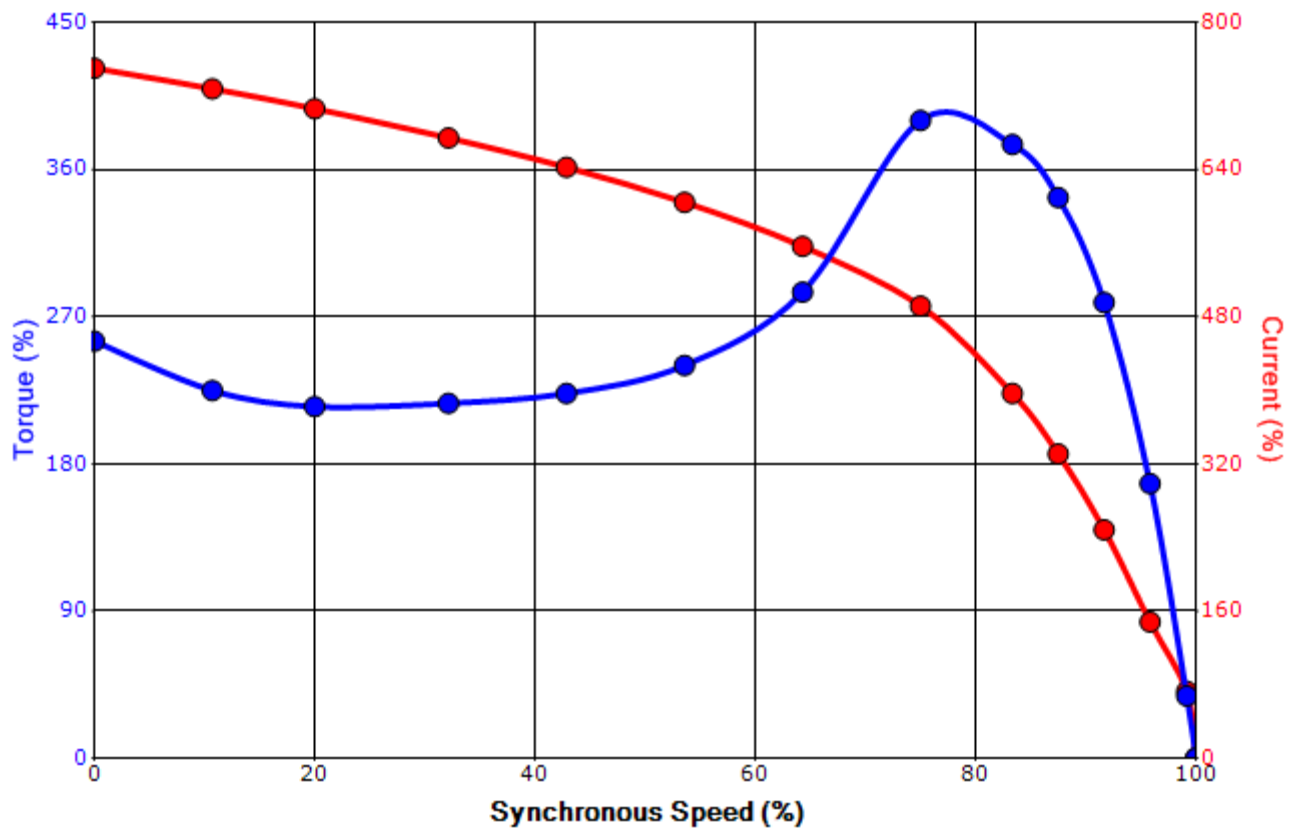

| | | | |
|-------------|--|--|-----|
| Customer | | wk ² Load Inertia (lb-ft ²) | - |
| Customer PO | | Load Type | - |
| Sales Order | | Voltage (%) | 100 |
| Project # | | Accel. Time | - |



Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

| | | | | | |
|-------------|-----------|------------------|-------------|-------------|---------------|
| Engineering | jhock | Doc. Written By | D. Suarez | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date | 6/11/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011 |

Motor Connection Diagram 3 Leads - Wye Connection

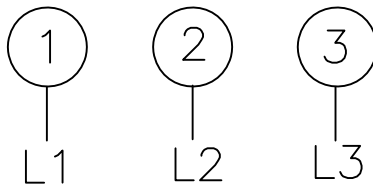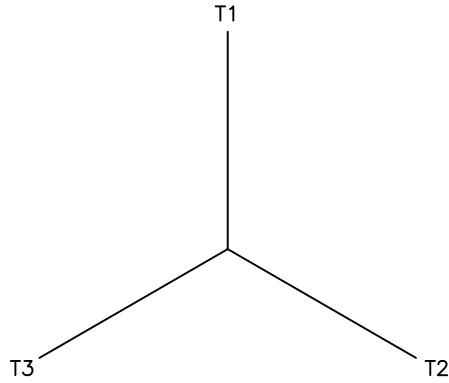

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.
If multiple cables represent a single lead, each one
of them will be labeled with the appropriate lead number.