


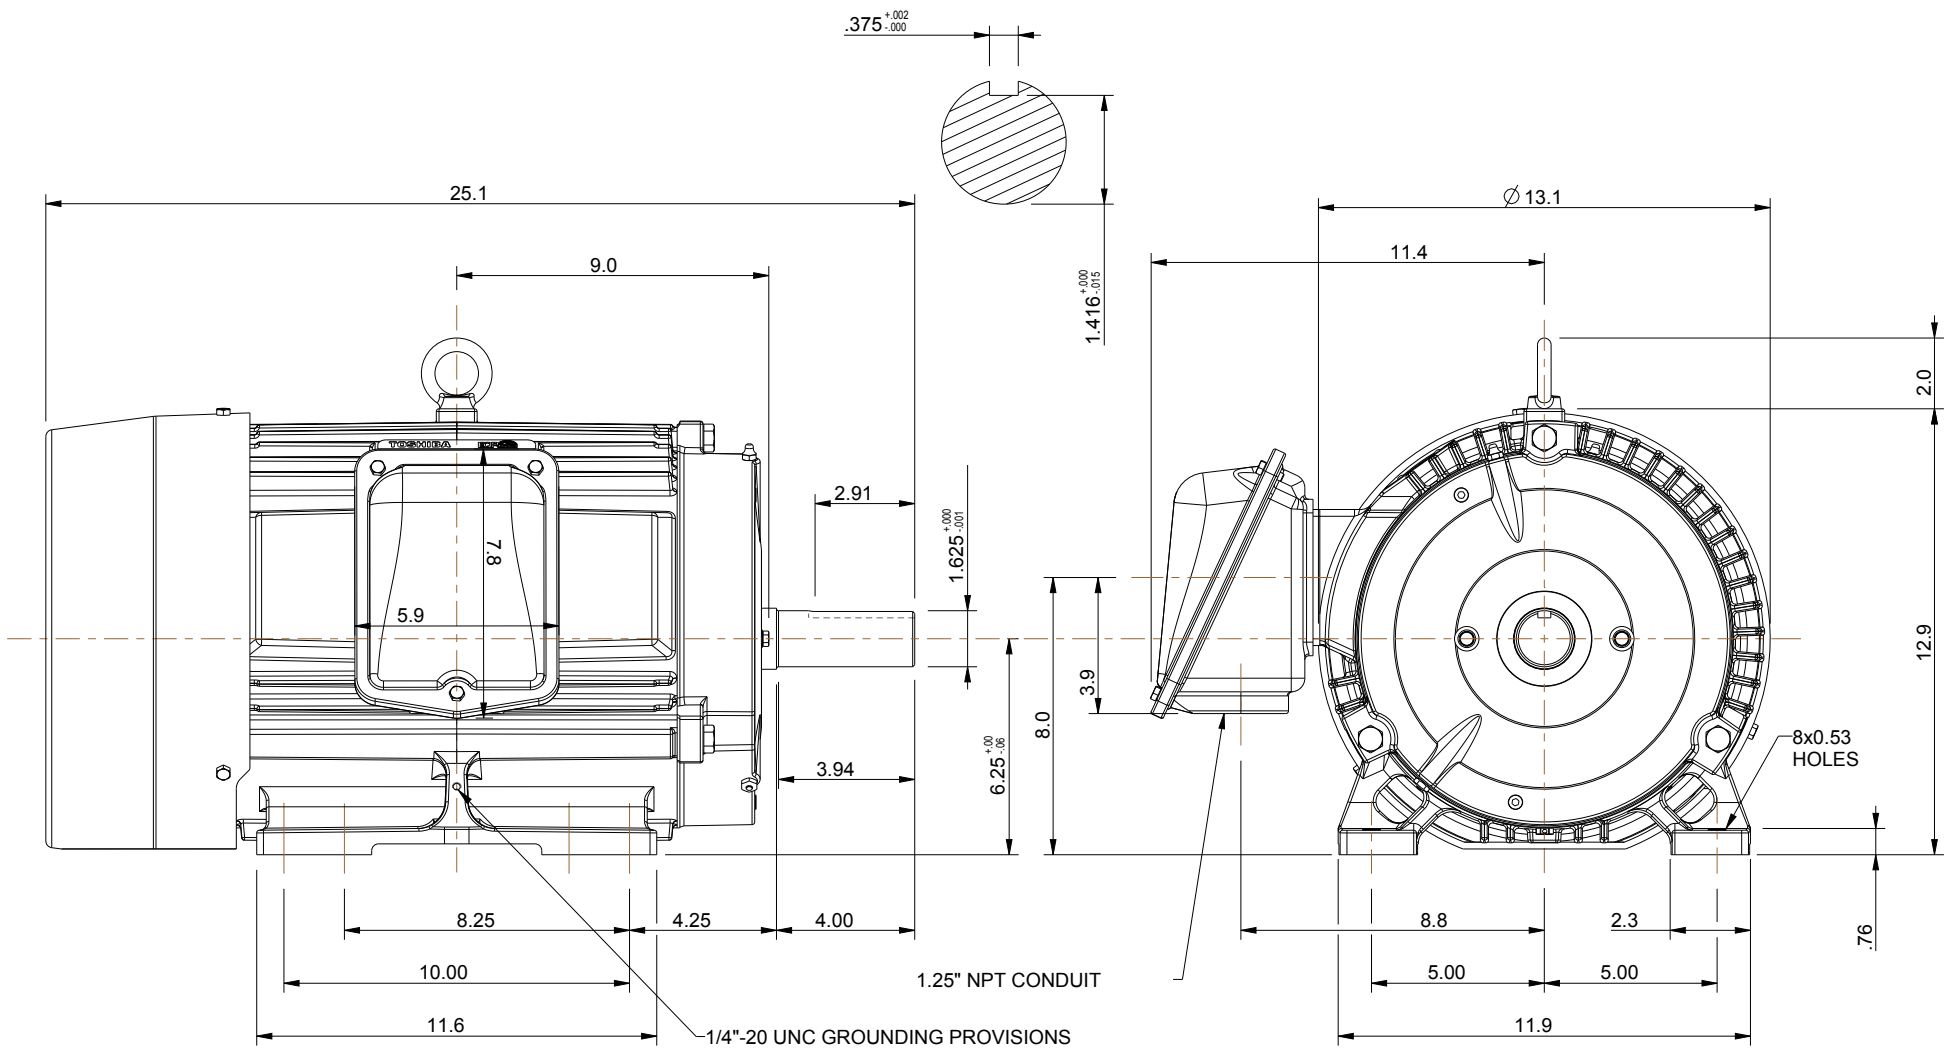

- NOTES:
1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
  2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
  3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)
- 0.375" x 0.375" x 2.88"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

## 250T TEFC FRAME F1 ASSEMBLY

MDSLVO81-04

**TOSHIBA**  
TOSHIBA INTERNATIONAL CORPORATION

### TOLERANCES

|       |       |
|-------|-------|
| .X    | .1    |
| .XX   | .03   |
| .XXX  | .005  |
| .XXXX | .0005 |

### MAXIMUM MOTOR WEIGHT

340 lbs.  
154 kgs.

|    |                                       |          |          |       |
|----|---------------------------------------|----------|----------|-------|
| 0  | FIRST ISSUE (OVERRIDE "U" DIM. VALUE) | N. MOMIN | 12/16/10 | JR    |
| NO | REVISION                              | DRAWN BY | DATE     | CHECK |

**EQP Global 841**  
**XT SERIES**

DRAWN BY: N. MOMIN  
CHECK BY: J. RUSSELL  
APPROVED BY: \_\_\_\_\_  
www.toshiba.com/ind

## TYPICAL MOTOR PERFORMANCE DATA

Model: 0204XDSB41A-P

| HP        | kW | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|----|------------|--------|-------|----------------|-------------|----------|--------------|
| 20        | 15 | 4          | 1770   | 256T  | 460            | 60          | 3        | 26           |
| Enclosure | IP | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 56 | F          | 1.15   | CONT  | 93             | B           | G        | 40 C         |

| Load         | HP    | kW   | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|-------|------|---------|----------------|------------------|
| Full Load    | 20    | 14.9 | 25.4    | 93.3           | 81.0             |
| ¾ Load       | 15.00 | 11.2 | 20.4    | 92.6           | 78.1             |
| ½ Load       | 10.00 | 7.5  | 16.1    | 90.7           | 70.4             |
| ¼ Load       | 5.00  | 3.7  | 11.1    | 83.6           | 50.1             |
| No Load      |       |      | 10.5    |                |                  |
| Locked Rotor |       |      | 145.00  |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 59.3              | 260                  | 215             | 280                | 3.18                       |

| Safe Stall Time(s) |      | Sound Pressure dB(A) @ 1M | Bearings* |        | Approx. Motor Weight (lbs) |
|--------------------|------|---------------------------|-----------|--------|----------------------------|
| Cold               | Hot  |                           | DE        | NDE    |                            |
| 33.8               | 21.8 | -                         | 6309C3    | 6309C3 |                            |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global 841  
Mounting:Footed,Shaft:T Shaft

|             |  |  |
|-------------|--|--|
| Customer    |  |  |
| Customer PO |  |  |
| Sales Order |  |  |
| Project #   |  |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**


|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

## SPEED TORQUE/CURRENT CURVE

Model: 0204XDSB41A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 20                | 15                                                  | 4                 | 1770             | 256T        | 460            | 60             | 3        | 26           |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 56                                                  | F                 | 1.15             | CONT        | 93             | B              | G        | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 145.00            | 3.18                                                | 59.3              | 260              | 215         |                | 280            |          |              |

### Design Values

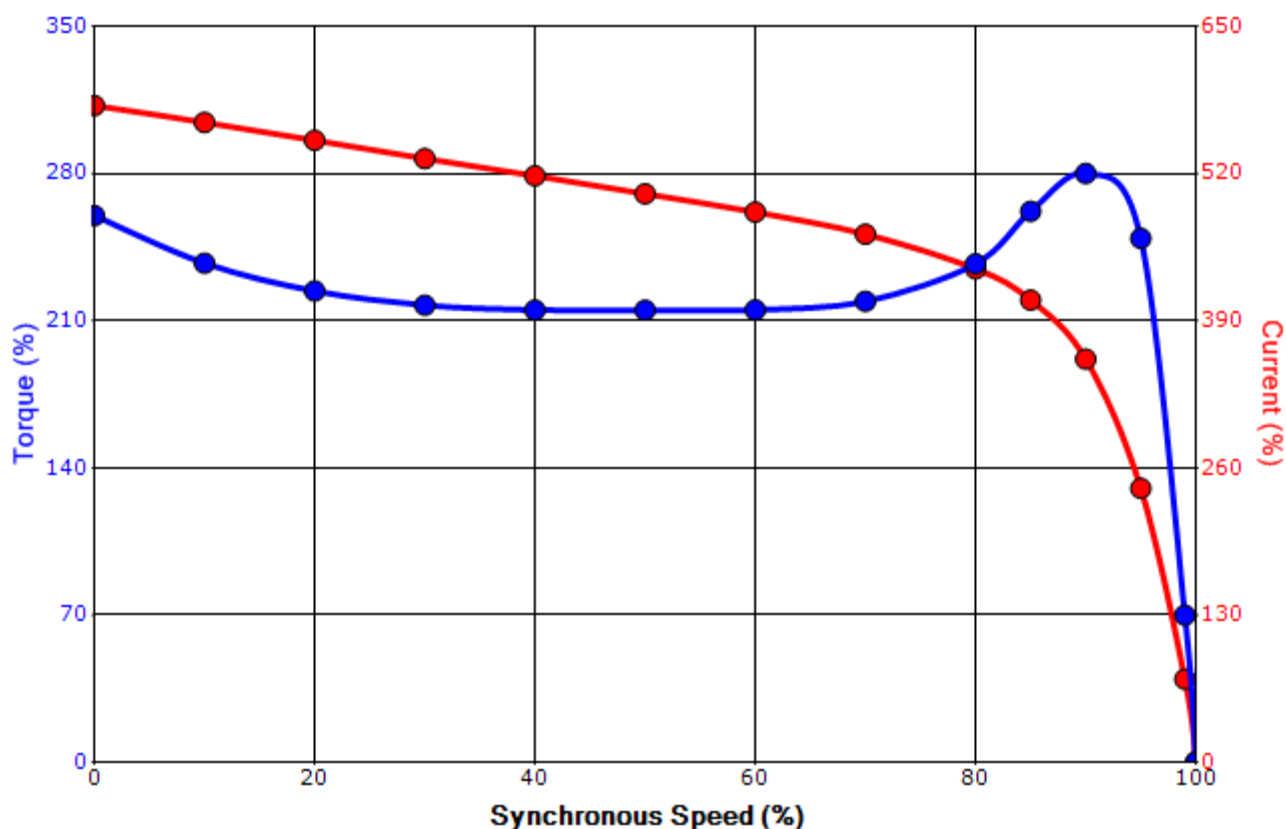

|             |  |  |                                                    |     |
|-------------|--|--|----------------------------------------------------|-----|
| Customer    |  |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  |  | Load Type                                          | -   |
| Sales Order |  |  | Voltage (%)                                        | 100 |
| Project #   |  |  | Accel. Time                                        | -   |

Tag:

All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# Motor Connection Diagram

## 3 Leads - Delta Connection



Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.