


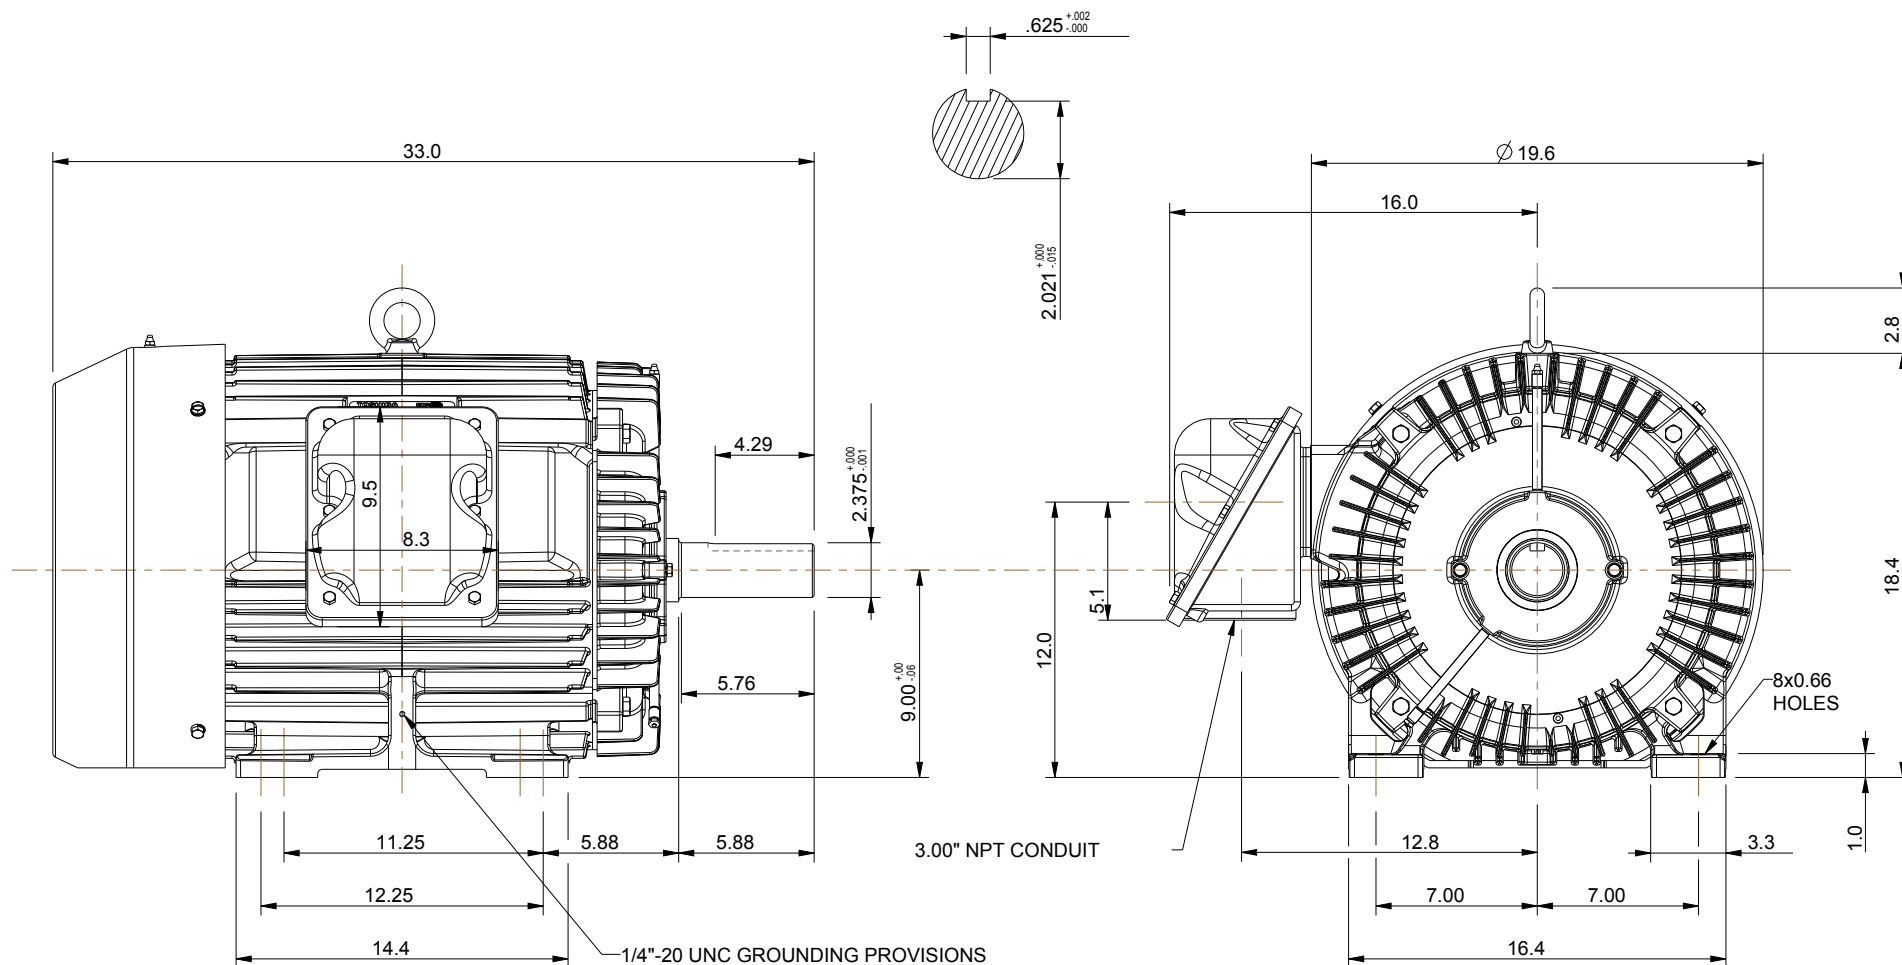

# NOTES:

1. MAIN CONDUIT BOX MAY BE ROTATED IN 90° INCREMENTS
2. STANDARD PRODUCT USE BI-DIRECTIONAL FAN. OPPOSITE ROTATION AVAILABLE ONLY BY CONNECTION CHANGE.
3. KEY DIMENSIONS EQUAL (MOTOR SUPPLIED WITH KEY)

0.625" x 0.625" x 4.25"

UNITS: INCHES

TOSHIBA RESERVES THE RIGHT TO MAKE CHANGES OF TECHNICAL IMPROVEMENT WITHOUT NOTICE. DO NOT USE FOR CONSTRUCTION, INSTALLATION, OR APPLICATION PURPOSES UNLESS THE DRAWING IS CERTIFIED.

## 360T TEFC FRAME F1 ASSEMBLY

MDSLVO81-07

# TOSHIBA

TOSHIBA INTERNATIONAL CORPORATION

### TOLERANCES

|       |       |
|-------|-------|
| .X    | .1    |
| .XX   | .03   |
| .XXX  | .005  |
| .XXXX | .0005 |

### MAXIMUM MOTOR WEIGHT

893 lbs.  
405 kgs.

| NO | REVISION                        | DRAWN BY | DATE     | CHECK |
|----|---------------------------------|----------|----------|-------|
| 1  | CHANGED "H" DIMENSION FROM 0.67 | MO       | 04/23/14 | JR    |
| 0  | FIRST ISSUE                     | N. MOMIN | 12/14/10 | JR    |
| NO |                                 |          |          |       |

**EQP** Global 841  
**XT SERIES**

DRAWN BY: N. MOMIN  
CHECK BY: J. RUSSELL  
APPROVED BY:

www.toshiba.com/ind

## TYPICAL MOTOR PERFORMANCE DATA

Model: 0506XDSB41A-P

| HP        | kW | Pole       | FL RPM | Frame | Voltage        | Hz          | Phase    | FL Amps      |
|-----------|----|------------|--------|-------|----------------|-------------|----------|--------------|
| 50        | 37 | 6          | 1180   | 365T  | 460            | 60          | 3        | 60           |
| Enclosure | IP | Ins. Class | S.F.   | Duty  | NEMA Nom. Eff. | NEMA Design | kVA Code | Ambient (°C) |
| TEFC      | 56 | F          | 1.15   | CONT  | 94.1           | B           | G        | 40 C         |

| Load         | HP    | kW   | Amperes | Efficiency (%) | Power Factor (%) |
|--------------|-------|------|---------|----------------|------------------|
| Full Load    | 50    | 37.3 | 60.0    | 94.1           | 85.2             |
| ¾ Load       | 37.50 | 28.0 | 45.7    | 94.0           | 82.4             |
| ½ Load       | 25.00 | 18.6 | 33.9    | 93.2           | 75.2             |
| ¼ Load       | 12.50 | 9.3  | 24.7    | 89.2           | 53.0             |
| No Load      |       |      | 18.2    |                |                  |
| Locked Rotor |       |      | 360.00  |                |                  |

| Torque            |                      |                 |                    | Rotor wk² Inertia (lb-ft²) |
|-------------------|----------------------|-----------------|--------------------|----------------------------|
| Full Load (lb-ft) | Locked Rotor (% FLT) | Pull Up (% FLT) | Break Down (% FLT) |                            |
| 223               | 185                  | 165             | 250                | 20.06                      |

| Safe Stall Time(s) |      | Sound Pressure dB(A) @ 1M | Bearings* |        | Approx. Motor Weight (lbs) |
|--------------------|------|---------------------------|-----------|--------|----------------------------|
| Cold               | Hot  |                           | DE        | NDE    |                            |
| 25.1               | 12.1 | -                         | 6314C3    | 6312C3 |                            |

\*Bearings are the only recommended spare part(s).

**Motor Options:**  
Product Family:EQP Global 841  
Mounting:Footed,Shaft:T Shaft

|             |  |
|-------------|--|
| Customer    |  |
| Customer PO |  |
| Sales Order |  |
| Project #   |  |

Tag:

All characteristics are average expected values.

**TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.**



|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1119 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# SPEED TORQUE/CURRENT CURVE

Model: 0506XDSB41A-P

| HP                | kW                                                  | Pole              | FL RPM           | Frame       | Voltage        | Hz             | Phase    | FL Amps      |
|-------------------|-----------------------------------------------------|-------------------|------------------|-------------|----------------|----------------|----------|--------------|
| 50                | 37                                                  | 6                 | 1180             | 365T        | 460            | 60             | 3        | 60           |
| Enclosure         | IP                                                  | Ins. Class        | S.F.             | Duty        | NEMA Nom. Eff. | NEMA Design    | kVA Code | Ambient (°C) |
| TEFC              | 56                                                  | F                 | 1.15             | CONT        | 94.1           | B              | G        | 40 C         |
| Locked Rotor Amps | Rotor wk <sup>2</sup> Inertia (lb-ft <sup>2</sup> ) | Torque            |                  |             |                |                |          |              |
|                   |                                                     | Full Load (lb-ft) | Locked Rotor (%) | Pull Up (%) |                | Break Down (%) |          |              |
| 360.00            | 20.06                                               | 223               | 185              | 165         |                | 250            |          |              |

## Design Values

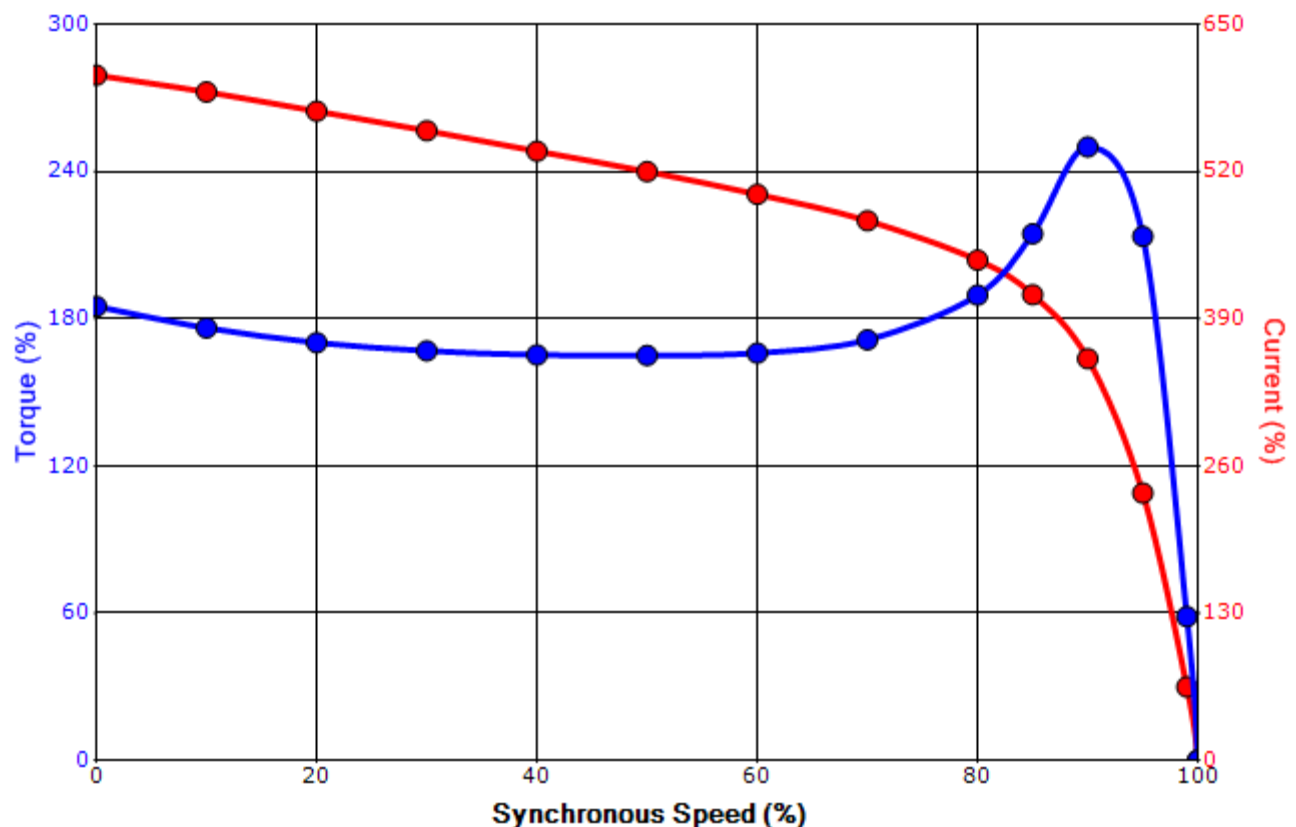

|             |  |  |                                                    |     |
|-------------|--|--|----------------------------------------------------|-----|
| Customer    |  |  | wk <sup>2</sup> Load Inertia (lb-ft <sup>2</sup> ) | -   |
| Customer PO |  |  | Load Type                                          | -   |
| Sales Order |  |  | Voltage (%)                                        | 100 |
| Project #   |  |  | Accel. Time                                        | -   |

Tag:



All characteristics are average expected values.

TOSHIBA INTERNATIONAL CORPORATION · HOUSTON, TEXAS U.S.A.

|             |          |                  |             |             |               |
|-------------|----------|------------------|-------------|-------------|---------------|
| Engineering | jaustin  | Doc. Written By  | D. Suarez   | Doc.# / Rev | MPCF-1121 / 0 |
| Engr. Date  | 7/7/2014 | Doc. Approved By | M. Campbell | Doc. Issued | 6/8/2011      |

# Motor Connection Diagram

## 3 Leads - Delta Connection

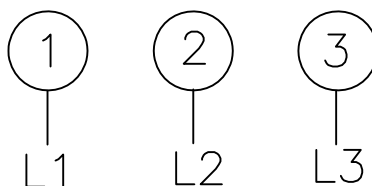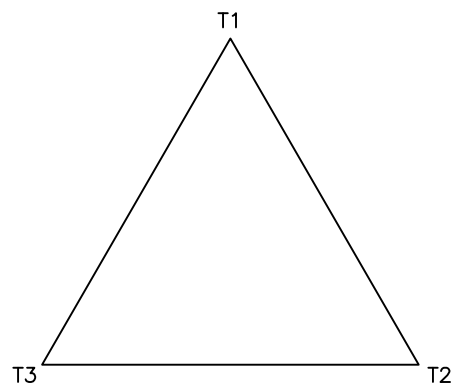

Switch L1 and L2 to reverse rotation

Each lead may consist of more than one cable.  
If multiple cables represent a single lead, each one  
of them will be labeled with the appropriate lead number.