

# Straight Blade Devices

## 15 and 20 Ampere, 250 Volts

2 Pole, 3 Wire Grounding

### Insulgrip® and Valise® Connector Bodies and Flanged Receptacles



Fed.Spec.



**NEMA 6-15R**  
15A 250V  
UL CSA




**NEMA 6-20R**  
20A 250V  
UL Listed


## Connector Bodies

Description	Cord Diameter	Catalog Number	
Insulgrip® Connector Body, black and white nylon, multiple drive screws.	.230"-.720" (5.8-18.3)	<b>HBL5669C</b>	<b>HBL5469C</b>
Valise® Connector Body, yellow nylon.	.220"-.660" (5.6-16.8)	<b>HBL5669VY</b>	<b>HBL5469VY</b>

Note: See page A-47 for accessories.



**HBL5669C**

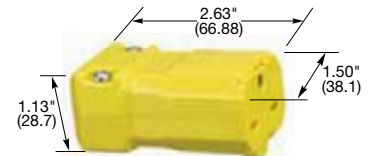

**HBL5669VY**



**NEMA 6-15R**  
15A 250V  
UL CSA




**NEMA 6-20R**  
20A 250V  
UL Listed


## Flanged Receptacles

Description	Catalog Number	
Nylon casing, multiple drive screws.	<b>HBL5679C</b>	<b>HBL5479C</b>
Stainless steel flange, brown phenolic housing (mounting screws packaged separately).	<b>HBL5656</b>	-

Note: Connector bodies are not HP rated.  
See pages A-46 and A-47 for accessories.



**HBL5679C**



**HBL5656**