



Twist-Lock® Devices

20 Ampere, 3ØY 120/208, 277/480 and 347/600 Volts AC

4 Pole, 5 Wire Grounding

Insulgrip® Plugs and Flanged Inlets




20A 3ØY
120/208V AC
NEMA L21-20P
UL/CSA
2 HP



20A 3ØY
277/480V AC
NEMA L22-20P
UL/CSA
5 HP



20A 3ØY
347/600V AC
NEMA L23-20P
UL/CSA

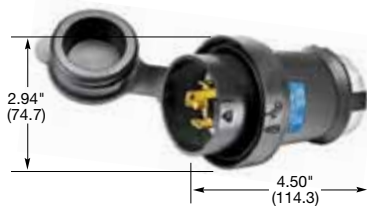

HBL2511SW




HBL2511S



HBL2511



HBL2515SW



HBL2515

Plugs

Watertight Safety-Shroud®

IP66 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	HBL2511SW	-	-

Safety-Shroud®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.	.350"-1.150" (9-29)	HBL2511S	-	-

Accessories on page B-40.

Insulgrip®

IP20 SUITABILITY

Description	Cord Dia.	Catalog Number			
Black and white nylon.	.350"-1.150" (9-29)	HBL2511	HBL2521	HBL2531	
All black nylon.	.350"-1.150" (9-29)	HBL2511BK	-	-	
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	HBL25CM11	-	-	
Black and white for flat cable.	.350"-1.150" (9-29)	HBL2511FC	-	-	

Accessories on page B-53.

Flanged Inlets

Watertight Safety-Shroud®

IP66 SUITABILITY

Description	Catalog Number		
Gray Valox® housing and flange.	HBL2515SW	-	-

Accessories on page B-52.

Insulgrip®

IP20 SUITABILITY

Description	Catalog Number			
Nylon casing, back wired.	HBL2515	HBL2525	HBL2535	

Accessories on page B-52.

Note: For technical information on Twist-Lock and Watertight Safety-Shroud devices see pages B-69 and B-70.



HBLMITL - For use with Watertight Safety-Shroud receptacles, see page B-39.

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.