

Twist-Lock® Devices

20 Ampere, 3Ø Y 120/208, 277/480 and 347/600 Volts AC

4 Pole, 5 Wire Grounding

Insulgrip® Connector Bodies and Receptacles



Connector Bodies

Watertight Safety-Shroud®		IP66 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	HBL2513SW	-	-

Insulgrip®		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon.	.350"-1.150" (9-29)	HBL2513	HBL2523	HBL2533
All black nylon.	.350"-1.150" (9-29)	HBL2513BK	-	-
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	HBL25CM13	-	-
Black and white for flat cable.	.350"-1.150" (9-29)	HBL2513FC	-	-

Accessories on page B-53.



HBL2513SW



HBL2513

Receptacles

Watertight Safety-Shroud®, Back Wired		IP66 SUITABILITY		
Description	Catalog Number			
Gray Valox® housing and flange.	HBL2510SW	-	-	-

Accessories on page B-54.

Safety-Shroud® Twist-Lock®, Back Wired		IP20 SUITABILITY		
Description	Catalog Number			
Gray Valox® angle housing, one gang.	HBL2510AR	-	-	-
Gray Valox® surface mounting, one gang.	HBL2510SR	-	-	-
Gray Valox® semi-flush, two gang.	HBL2510SR2	-	-	-

Accessories on page B-54.



HBL2510SW

Single Flush, Back and Side Wired		IP20 SUITABILITY		
Description	Catalog Number			
Black nylon face.	HBL2510	HBL2520*	HBL2530*	
Isolated ground, orange nylon face.	IG2510	-	-	

Accessories on page B-52.




HBL2510AR

Insulgrip® Flanged Receptacles				
Description	Catalog Number			
Nylon casing, back wired.	HBL2516	HBL2526	HBL2536	

Accessories on page B-52.

Note: * Not Fed Spec.

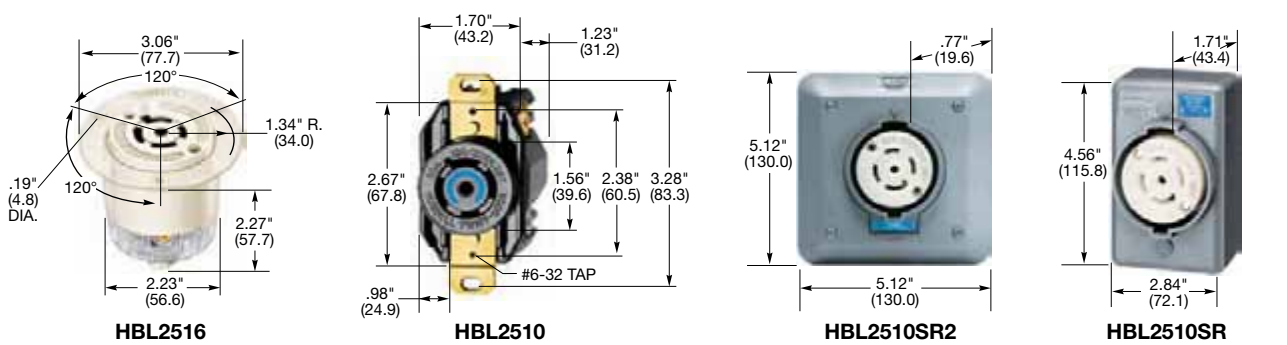

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.

Dimensions in Inches (mm)

www.hubbell-wiring.com



B-25