


Twist-Lock® Devices

30 Ampere, 3ØY 120/208, 277/480 and 347/600 Volts AC

4 Pole, 5 Wire Grounding

Insulgrip® Plugs and Flanged Inlets



Plugs

Watertight Safety-Shroud®		IP66 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black Valox® housing, white Valox® clamps.	.350"-1.150" (9-29)	HBL2811SW	HBL2821SW	HBL2831SW

Safety-Shroud®		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon body, white Valox® shroud. Can be used with the Insulgrip Connector Bodies.	.350"-1.150" (9-29)	HBL2811S	-	-

Accessories on page B-40.

Insulgrip		IP20 SUITABILITY		
Description	Cord Dia.	Catalog Number		
Black and white nylon.	.350"-1.150" (9-29)	HBL2811	HBL2821	HBL2831
Corrosion resistant, yellow nylon.	.350"-1.150" (9-29)	HBL28CM11	-	-
Black and white for flat cable.	.350"-1.150" (9-29)	HBL2811FC	-	-
All black nylon.	.350"-1.150" (9-29)	HBL2811BK	-	-

Accessories on page B-53.

Flanged Inlets



Watertight Safety-Shroud®		IP66 SUITABILITY		
Description	Catalog Number			
Gray Valox® housing and flange.	HBL2815SW	-	-	-

Accessories on page B-54.

Insulgrip®		IP20 SUITABILITY		
Description	Catalog Number			
Nylon casing, back wired.	HBL2815	HBL2825	HBL2835	-

Accessories on page B-52.

Note: For technical information on Twist-Lock and Watertight Safety-Shroud devices see pages B-69 and B-70.

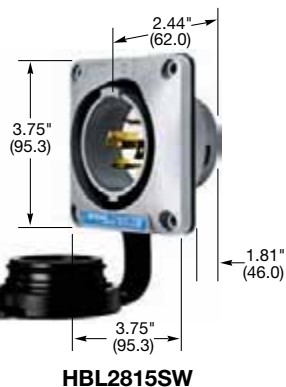

HBLMITL - For use with Watertight Safety-Shroud receptacles, see page B-39.

Valox® is a trademark of SABIC Innovative Plastics, acquired from General Electric Company.