


Hubbellock® Devices
60 Ampere, 600 Volts AC
 3 Pole, 4 Wire Grounding and 4 Pole, 5 Wire Grounding
Connector Bodies and Receptacles



IP30
SUITABILITY

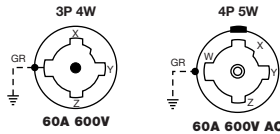

Connector Bodies

Description	Cord Dia.	Catalog Number
Black phenolic interior with yellow thermoplastic sleeve over steel cover.	.920"-1.450" (23.36-36.83)	HBL26418 -
Black phenolic interior with blue thermoplastic sleeve over steel cover.	1.00"-1.50" (25.40-38.10)	- HBL26516



HBL26418




HBL26516


IP44
SUITABILITY

Receptacles

Description	Catalog Number
Black phenolic interior with short aluminum housing and lift cover.	HBL26410 -
Black phenolic interior with long aluminum housing and lift cover.	HBL26420 -
Black phenolic interior with long aluminum housing with lift cover and blue finish.	- HBL26520

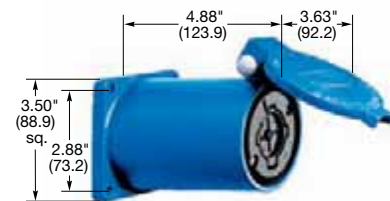

HBL26520

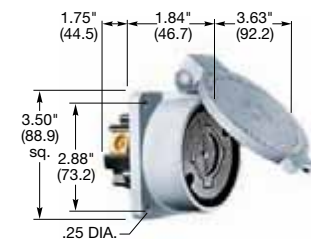


HBL26410


Flanged Receptacles

IP30
SUITABILITY


Description	Catalog Number
Black phenolic interior with steel housing and flange.	HBL26421 -
Black phenolic interior with steel housing and flange with blue finish.	- HBL26521

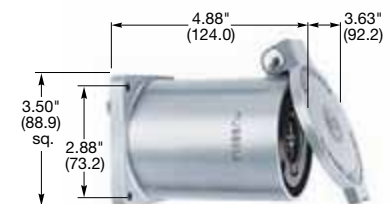

HBL26420

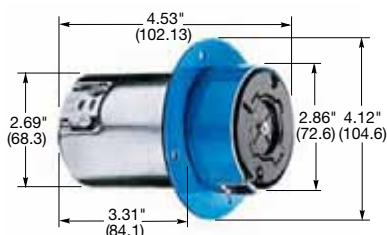

HBL26521

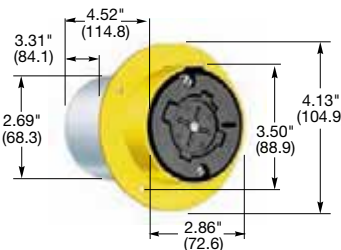

HBL26421

