


PANDUIT® Wire Abrasion Protection

Panduit® abrasion protection products provide an economical and easy way to insulate, protect, bundle and color-code components and cable. A wide variety of sizes and materials are available to meet a broad range of indoor and outdoor applications.

To help assure optimum quality, Panduit abrasion protection products are designed and manufactured to meet applicable quality standards including International, UL, Military, ISO, and Aerospace.

Panduit abrasion protection products provide quality at the lowest installed cost. With a continued focus on new product development, Panduit continues to meet customer needs.

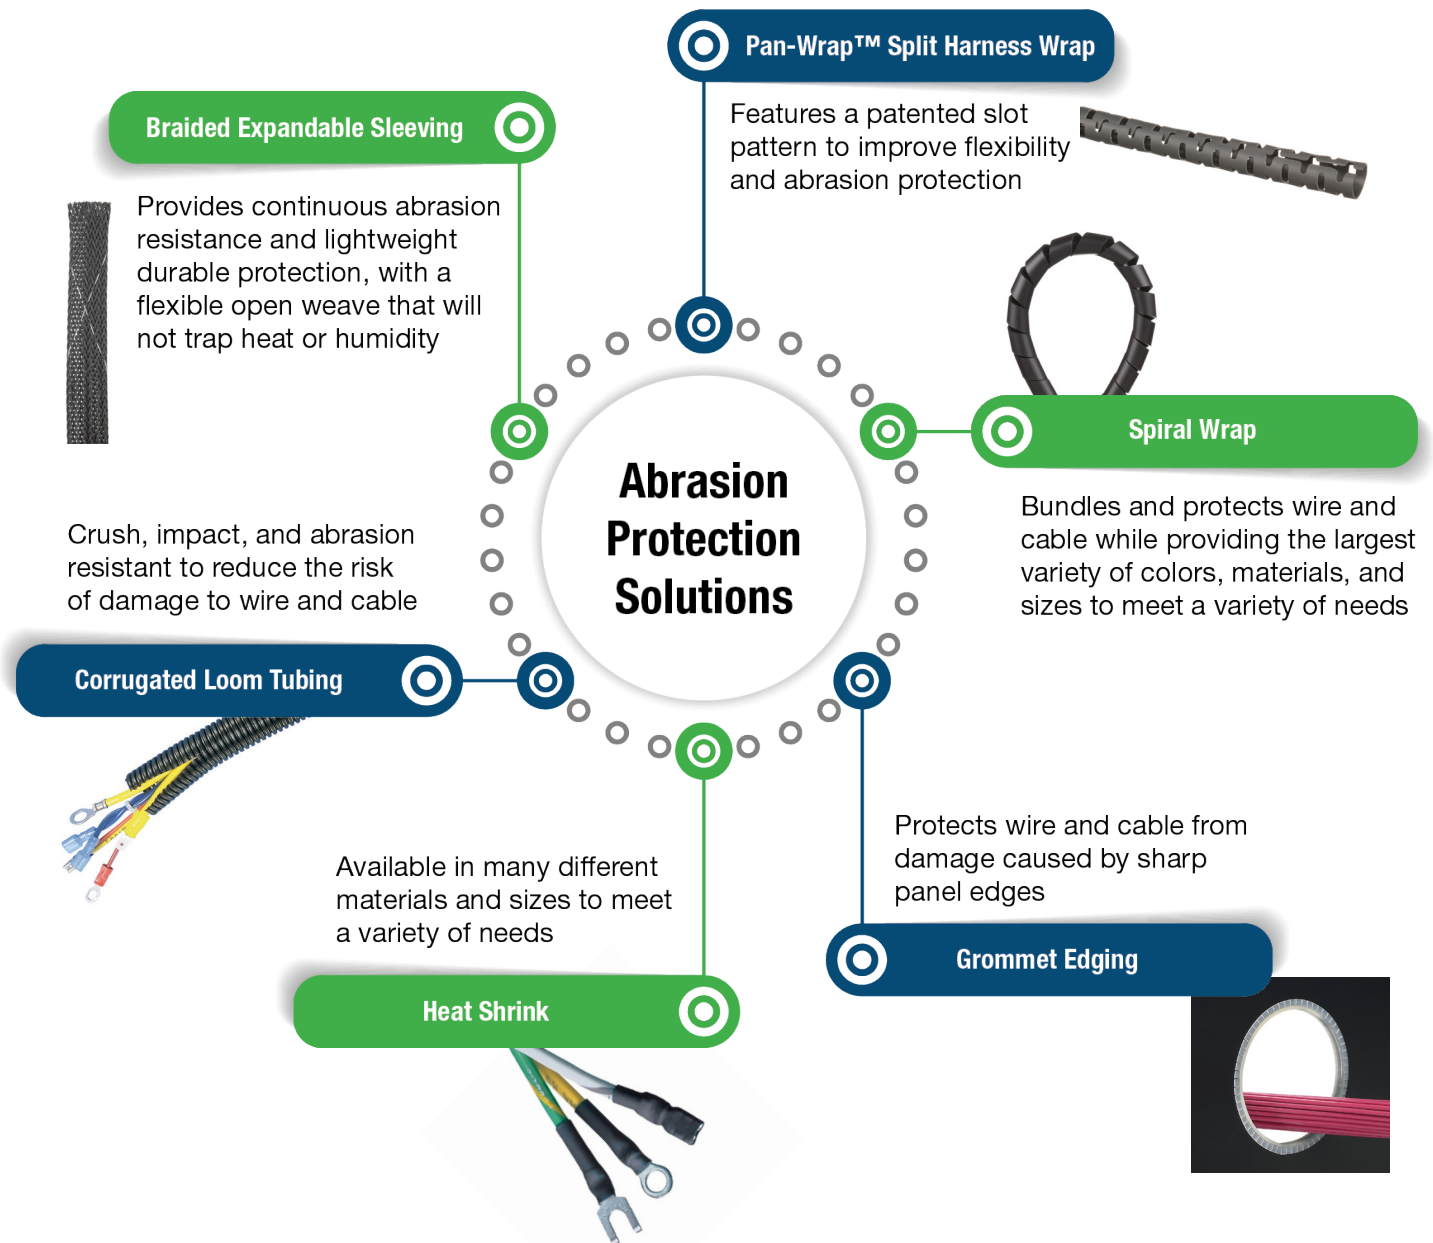



Braided Sleeving - Standard Package Quantity: 1

	Part Number	Color	Nominal I.D.		Nominal Diameter Range		Length per Reel†		Std. Ctn. Qty.				
			In.	mm	In.	mm	Ft.	m					
PET Material													
	SE12P-TR0	Black	0.12	3.2	0.094 – 0.250	2.4 – 6.4	200	61.0	4				
	SE25P-MR0		White	0.25	6.4	0.125 – 0.375	3.2 – 9.5	1000	304.8	2			
	SE25P-MR10	Gray						200	61.0	4			
	SE25P-MR8												
	SE25P-TR0	Black	0.38	9.5	0.188 – 0.500	4.8 – 12.7	200	61.0	4				
	SE38P-MR0						1000	304.8	2				
	SE38P-TR0						200	61.0	4				
	SE50P-CR0						0.50	12.7	0.250 – 0.750	6.4 – 19.1	100	30.5	4
Best Seller	SE50P-DR0										500	152.4	2
	SE75P-CR0						0.75	19.1	0.500 – 1.25	12.7 – 31.8	100	30.5	4
Best Seller	SE75P-DR0	500	152.4	2									
	SE125P-LR0	Black	1.25	31.8	0.750 – 1.50	19.1 – 38.1	50	15.2	4				
	SE125P-TR0						200	61.0	2				
	SE125P-TR8	Gray											
	SE150P-TR0	Black	1.50	38.1	1.00 – 2.13	25.4 – 54.0	200	61.0	2				
	SE175P-TR0		1.75	44.5	1.25 – 2.75	31.8 – 69.9							
Flame Retardant PET Material													
	SE12PFR-MR0	Black	0.12	3.2	0.094 – 0.250	2.4 – 6.4	1000	304.8	2				
	SE12PFR-TR0	Black					0.25	6.4	0.125 – 0.375	3.2 – 9.5	200	61.0	4
	SE25PFR-MR0		1000	304.8	2								
	SE25PFR-TR0		Gray	200	61.0	4							
	SE25PFR-TR8												
	SE38PFR-MR0	Black	0.38	9.5	0.188 – 0.500	4.8 – 12.7	1000	304.8	2				
	SE38PFR-TR0						200	61.0	4				
	SE50PFR-CR0						0.50	12.7		0.250 – 0.750	6.4 – 19.1	100	30.5
Best Seller	SE50PFR-DR0								500			152.4	2
	SE75PFR-CR0						0.75	19.1	0.500 – 1.25	12.7 – 31.8	100	30.5	4
	SE75PFR-DR0										500	152.4	2
	SE125PFR-TR0	1.25	31.8	0.750 – 1.50	19.1 – 38.1	200	61.0						
	SE150PFR-TR0	1.50	38.1	1.00 – 2.13	25.4 – 54.0								


Braided Sleeving (continued) - Standard Package Quantity: 1

	Part Number	Color	Nominal Size Diameter		Nominal Wall Thickness		Length per Reel‡		Std. Ctn. Qty.
			In.	mm	In.	mm	Ft.	m	

Pan Wrap Braided Sleeving (PET)

New	SE38PS-TR0	Black	0.375	9.5	0.027	0.7	200	61.0	2
	SE50PS-CLR0		0.50	12.7			150	45.7	
	SE75PS-CR0		0.75	19.1			100	30.5	
	SE100PS-CR0		1.00	25.4					
New	SE125PS-CR0		1.25	31.8					
New	SE200PS-LR0		2.0	50.8			50	15.2	

Pan Warp Braided Sleeving (Flame Retardant PET)

New	SE38PSFR-TR0	Black	0.375	9.5	0.027	0.7	200	61.0	2
New	SE125PSFR-CR0		1.25	31.8			100	30.5	
New	SE200PSFR-LR0		2.0	50.8			50	15.2	

Fray Resistant

Part Number	Color	Nominal I.D.		Nominal Diameter Range		Length per Reel‡		Std. Ctn. Qty.
		In.	mm	In.	mm	Ft.	m	
SE38PSC-TR0	Black	0.38	9.5	0.19 - 0.63	4.8 - 15.9	200	61.0	4
SE50PSC-CR0		0.50	12.7	0.25 - 0.75	6.4 - 19.1	100	30.5	
SE75PSC-CR0		0.75	19.1	0.63 - 1.0	15.9 - 25.4			