




Product availability: Non-Stock - Not normally stocked in distribution facility

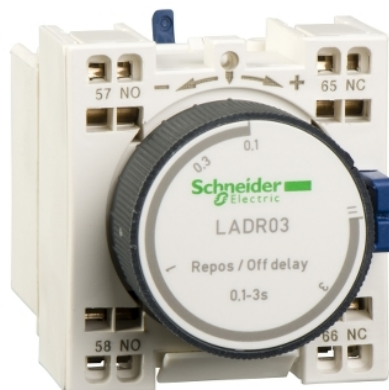

### Main

Range of product	TeSys D
Range	TeSys
Product or component type	Time delay auxiliary contact block
Pole contact composition	1 NO + 1 NC
Connections - terminals	Spring terminals 2 0.00 in <sup>2</sup> (2.5 mm <sup>2</sup> )flexible without cable end Spring terminals 2 0.00 in <sup>2</sup> (2.5 mm <sup>2</sup> )solid without cable end

### Complementary

Mounting location	Front
[Ui] rated insulation voltage	600 V UL 690 V IEC 60947-5-1
[Ue] rated operational voltage	690 V AC 25...400 Hz
[Ith] conventional free air thermal current	10 A 140 °F (60 °C)
Irms rated making capacity	140 A AC 250 A DC
Permissible short-time rating	100 A 140 °F (60 °C) 1 s 120 A 140 °F (60 °C) 500 ms 140 A 140 °F (60 °C) 100 ms
Protection type	GG fuse 10 A rating according to operational current for Ue ≤ 690 V
Associated fuse rating	10 A gG IEC 60947-5-1
Mechanical durability	5 Mcycles
Minimum switching current	5 mA
Minimum switching voltage	17 V
Non-overlap time	1.5 Ms on de-energisation no overlap between NC and NO contact 1.5 ms on energisation no overlap between NC and NO contact
Timer type	On delay
Time delay range	0.1...30 s
Insulation resistance	> 10 MOhm

### Environment

Environmental characteristic	Normal environment
Standards	BS 4794 EN 60947-5-1 VDE 0660 IEC 60947-5-1 NF C 63-140
Product certifications	UL CSA
IP degree of protection	IP2x VDE 0106
Protective treatment	TH IEC 60068
Ambient air temperature for operation	-40...158 °F (-40...70 °C)
Ambient air temperature for storage	-76...176 °F (-60...80 °C)
Operating altitude	9842.52 ft (3000 m) without

## Ordering and shipping details

Category	22341 - CONTACTOR,D,K,&F ACCESS
Discount Schedule	112
GTIN	00785901221234
Package weight(Lbs)	0.08 kg (0.18 lb(US))
Returnability	No
Country of origin	FR

## Offer Sustainability

Sustainable offer status	Green Premium product
California proposition 65	WARNING: This product can expose you to chemicals including: Diisononyl phthalate (DINP) which is known to the State of California to cause Carcinogen harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
REACH Regulation	<a href="#">REACH Declaration</a>
EU RoHS Directive	Compliant <a href="#">EU RoHS Declaration</a>
Mercury free	Yes
RoHS exemption information	<a href="#">Yes</a>
China RoHS Regulation	<a href="#">China RoHS Declaration</a>
Environmental Disclosure	<a href="#">Product Environmental Profile</a>
Circularity Profile	No need of specific recycling operations
WEEE	The product must be disposed on European Union markets following specific waste collection and never end up in rubbish bins.

## Contractual warranty

Warranty	18 months
----------	-----------