



Fast-Acting Ferrule Fuses

AGU

13/32" × 1 1/2" Midget



Dimensional Data

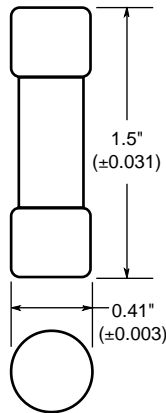

Catalog Symbol: AGU (5AG)
 Fast-Acting
 Ampere Rating: 1 to 60 Amperes
 No Agency Listings


- Glass tube.
- Nickel plated brass ferrules.

Options:

- Gold plated ferrules

Order number AGU-(amp)-1J0281

Time-Current Characteristic Curves—Average Melt

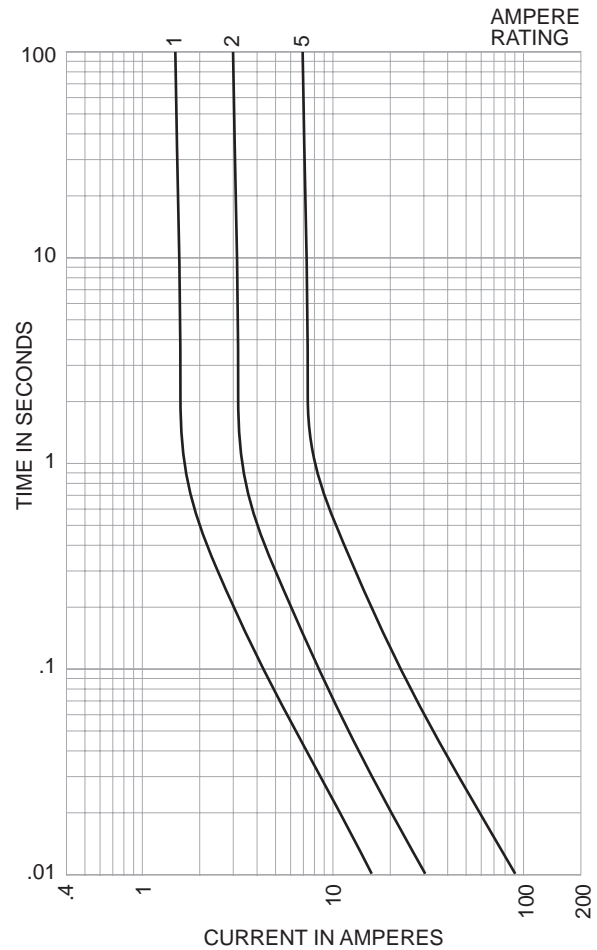

Electrical Ratings (Catalog Symbol and Amperes)

| 250 Volts AC | | 32 Volts AC | |
|--------------|--------|-------------|--------|
| AGU-1 | AGU-4 | AGU-20 | AGU-50 |
| AGU-2 | AGU-5 | AGU-25 | AGU-60 |
| AGU-3 | AGU-8 | AGU-30 | — |
| — | AGU-10 | AGU-35 | — |
| — | AGU-15 | AGU-40 | — |

Carton Quantity and Weight

| Ampere Ratings | Carton Qty. | Weight | |
|----------------|-------------|--------|-------|
| | | Lbs. | Kg. |
| 1-60 | 100 | 1.3 | 0.590 |

CE CE logo denotes compliance with European Union Low Voltage Directive (50-1000 Vac, 75-1500 Vdc). Refer to BIF document #8002 or contact Bussmann Application Engineering at 314-527-1270 for more information.

Recommended Fuseblocks—30 amps maximum

| Poles | Terminal Type | | |
|-------|--------------------------|--------------------------------|---------|
| | Screw With Quick Connect | Pressure Plate w/Quick Connect | Box Lug |
| 1 | BM6031SQ | BM6031PQ | BM6031B |
| 2 | BM6032SQ | BM6032PQ | BM6032B |
| 3 | BM6033SQ | BM6033PQ | BM6033B |

The only controlled copy of this BIF document is the electronic read-only version located on the Bussmann Network Drive. All other copies of this document are by definition uncontrolled. This bulletin is intended to clearly present comprehensive product data and provide technical information that will help the end user with design applications. Bussmann reserves the right, without notice, to change design or construction of any products and to discontinue or limit distribution of any products. Bussmann also reserves the right to change or update, without notice, any technical information contained in this bulletin. Once a product has been selected, it should be tested by the user in all possible applications.