


Product availability: Stock - Normally stocked in distribution facility

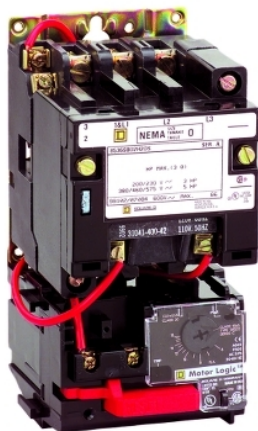

### Main

Product or component type	Starter
Type	S
Control Circuit Type	Separate control circuit

### Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Motor starter type	Non reversing
Current Rating	270 A
Number of Poles	3P
Number of Phases	3 phase
Horsepower Rating	75 HP 200 V AC 100 HP 230 V AC 200 HP 460 V AC 200 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Solid state Motor Logic class 10/20
Electrical connection	Screw clamp terminals
NEMA size	5
Height	17.56 in (446 mm)
Depth	8.74 in (222 mm)
Width	8.54 in (217 mm)


### Environment

Enclosure Type	Not rated (open device)
Product certifications	NEMA CSA UL listed

### Ordering and shipping details

Category	21194 - 8502,36SG(NOT S*R,S*T,S*W)
Discount Schedule	CP1
GTIN	00785901604082
Package weight(Lbs)	14.51 kg (32 lb(US))
Returnability	Yes
Country of origin	MX

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------