

Liquidtight Fittings

Type 4Q - 45° & 90°

Use:

To secure, ground and seal Liquidtight Flexible Metal conduit, Type LFMC, to boxes and enclosures.

Features:

- Tapered threaded male hub NPT.
- Compact, slim diameter with small turning radius.
- Furnished with locknut and KO sealing ring.
- Liquidtight/Raintight/Oiltight/Concretetight
- UL Listed NEMA Type 4 when installed into a NPT threaded entry or UL Listed conduit hub (sizes 1½" and larger require thread sealant).
- Suitable for grounding through 1½" Trade Size per NEC Section 250.118(7)
- For Trade Sizes 1½" and larger, an internal or external equipment bonding conductor is required. See 4Q-L Series with external ground lug in Catalog Section GB.
- Suitable for use in the following Hazardous Locations:
Class I, Div. 2 per NEC 501.4(B)
Class I, Zone 2 per NEC 505.15(C)(2)
Class II, Div. 1 per NEC 502.4(A)(1)(e)
Class II, Div. 2 per NEC 502.4(B)(2)
Class III, Div. 1 per NEC 503.3(A)(2)
Class III, Div. 2 per NEC 503.3(B)
Intrinsically Safe per NEC 504.20
- Bonding Wedge Locknuts are recommended in Hazardous Locations. See 101 Series on Page DB8.
- Suitable for wet locations.
- Long ferrule prevents pullout and tight bend conduit "pop-out".
- Reusable ferrule.
- Inspection windows in ferrule to ensure full engagement.
- See Page GC4 for our patented Ferrule Wrench which makes ferrule installation easy.

Material/Finish:

Malleable Iron Body and Nut, Zinc Electroplated. Steel Ferrule, Zinc Electroplated.

Optional Finish:

Available Hot-Dip/Mechanically Galvanized, See "4Q-TG" Series in Catalog Section GC.

Third Party Certification:


 UL Listed: 11853

 CSA Certified: 009795


Applicable Third Party Standards:

UL Standard: 514B
CSA Standard: C22.2 No. 18
NEMA: FB-1
Federal Spec: W-F-406E

Effective December, 2007
Copyright 2007

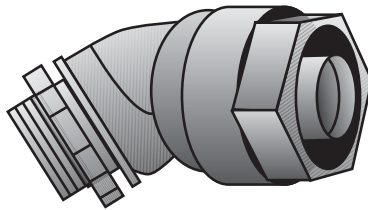



Type 4Q-438 — Type 4Q-4200




Type 4Q-4250 — Type 4Q-4500

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches		
			A	B	C Dia.
⅜ (½ KO)	4Q-438	4Q-438T	1⅛	⅝	1⅝
½	4Q-450	4Q-450T	1⅞	⅝	1⅞
¾	4Q-475	4Q-475T	2¼	⅝	1⅞
1	4Q-4100	4Q-4100T	2⅝	⅝	1⅞
1¼	4Q-4125	4Q-4125T	3¼	⅝	2⅞
1½	4Q-4150	4Q-4150T	3⅝	⅝	2⅞
2	4Q-4200	4Q-4200T	4	⅝	3
2½	4Q-4250	4Q-4250T	5¼	1	4⅝
3	4Q-4300	4Q-4300T	6⅞	1⅞	4⅝
4	4Q-4400	4Q-4400T	7½	1⅞	6⅝
5	4Q-4500	4Q-4500T	8	1⅞	7⅝

•UL Listing not applicable

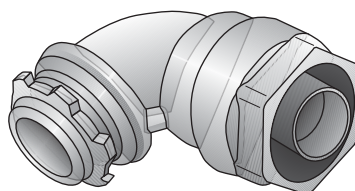

Type 4Q-938 — Type 4Q-9200

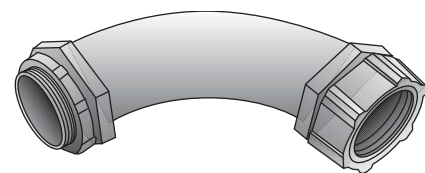

Type 4Q-9250 — Type 4Q-9500

Trade Size (inches)	Catalog Number	Insulated Throat Catalog Number	Dimensions in Inches			
			A	B	C	D
⅜ (½ KO)	4Q-938	4Q-938T	1⅞	⅝	1⅞	1⅞
½	4Q-950	4Q-950T	1⅞	⅝	1⅞	1⅞
¾	4Q-975	4Q-975T	1⅞	⅝	1⅞	1⅞
1	4Q-9100	4Q-9100T	2	⅝	1⅞	1⅞
1¼	4Q-9125	4Q-9125T	2¼	⅝	2⅞	2⅞
1½	4Q-9150	4Q-9150T	2⅞	⅝	2⅞	2⅞
2	4Q-9200	4Q-9200T	3½	¾	3	2⅞
2½	4Q-9250	4Q-9250T	7½	1	4⅝	7⅝
3	4Q-9300	4Q-9300T	8⅞	1⅞	4⅝	8⅞
4	4Q-9400	4Q-9400T	11⅞	1⅞	6⅝	11
5	4Q-9500	4Q-9500T	14	1⅞	7⅝	14

•UL Listing not applicable

