

FR 25-RLO

Autocollimation laser photoelectric retro-reflective sensor with 2 switching outputs Q²



PRODUCT HIGHLIGHTS

- Fast switching output for precise switching behavior and parallel IO-Link communication for quick format changes and diagnostic data
- Reliable small-part detection over the entire operating range from a size of 0.2 mm
- Precise front-edge detection even in fastest automation processes thanks to a high switching frequency of 10 kHz
- Constant detection position with lateral object approach over the entire operating range for maximum switching point and positioning accuracy

Optical data		Functions	
Limit range	0 ... 5 m ¹	Indicator LED, green	Operating voltage indicator
Operating range	0 ... 4 m ¹	Indicator LED, yellow	Switching output indicator
Type of light	Laser, red, 650 nm	Sensitivity adjustment	Via Teach-in button, control input and IO-Link
Light spot size	See diagram	Teach-in modes	Mode 1: during running process Mode 2: during standing process
Laser Class (IEC 60825-1)	1	Adjustment possibilities	N.O./N.C. and Auto-Detect / NPN / PNP via teach-in button, control input and IO-Link Button lock via control input and IO-Link Wide variety of adjustment possibilities via IO-Link
Polarising filter	Yes	Default settings	Max. range and N.O.
Electrical data		Mechanical data	
Operating voltage, +U _b	10 ... 30V DC ²	Dimensions	34 x 20 x 12 mm
No-load current, I ₀	≤ 30 mA	Enclosure rating	IP 69 & IP 67 ⁴
Output current, I _e	≤ 100 mA	Material, housing	ABS
Protective circuits	Reverse-polarity protection, U _b / short-circuit protection (Q)	Material, front screen	PMMA
Protection Class	2	Type of connection	See selection table
Power On Delay	< 300 ms	Ambient temperature: operation	-20 ... +60 °C ⁵
Switching output, Q	1x Auto-Detect (PNP/NPN) ³	Ambient temperature: storage	-20 ... +80 °C
Output function	N.O./N.C.	Weight (plug device)	10 g
Switching frequency, f (ti/tp 1:1)	See selection table	Weight (metal plug device ⁶)	10 g
Response time	See selection table	Weight (cable device)	40 g
Control input, I _N ³	+ U _b = teach-in - U _b = button locked Open = normal operation	Weight (pigtail)	20 g
		Vibration and impact resistance	EN IEC 60947-5-2
IO-Link			
Communication mode	COM 2	Length process data	16 Bit
Min. cycletime	2.3 ms	Specification	1.1
SIO mode	Compatible		

¹ Reference material: R5/L reflector

² Max. 10 % ripple, within U_b, ~ 50 Hz / 100 Hz


³ Auto-Detect, automatic PNP/NPN selection by the sensor, PNP or NPN fixed

⁴ With connected IP 67/IP 69 plug

⁵ UL: -20 ... +50 °C

⁶ No Ecolab

Switching frequency, f (ti/tp 1:1) ²	Response time	Switching output	Type of connection	Part number	Article number
≤ 10 kHz	50 μs	Auto-Detect	Metal plug, M8x1, 4-pin, IO-Link	FR 25-RLO1-2GSL-M4M	609-31025

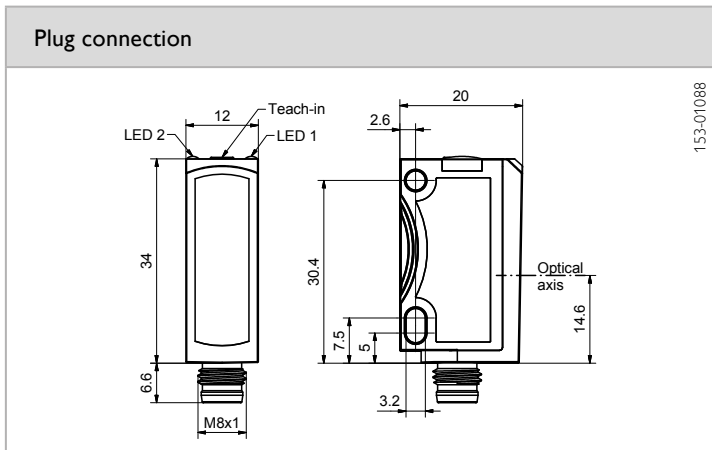

Connection, 4-pin, IO-Link	Lateral object approach
	<p>Reference material: RF-100 KL reflector</p>

Functional reserves	Light spot size

Reflector / Reflective foil*	Reflector distance	Scanning distance	Smallest detectable part	Reflector / Reflective foil*	Operating range (min./max. reflector distance)	Accessories
R5L	1000 ... 4000 mm	0 ... 4000 mm	≥ 1 mm	R5L	0 ... 4000 mm	Connection cables Brackets SensolO (901-01001)
RD 25LK	50 ... 500 mm	50 ... 500 mm	≥ 0,2 mm	RD 25LK	50 ... 600 mm	
RF-100 KL*	500 ... 2500 mm	0 ... 500 mm	≥ 0,2 mm	RF-100 KL*	0 ... 2500 mm	
R2-2LB1	500 ... 2500 mm	0 ... 500 mm	≥ 0,2 mm	R2-2LB1	0 ... 2500 mm	
R3-2LK1	500 ... 2500 mm	0 ... 500 mm	≥ 0,2 mm	R3-2LK1	0 ... 2500 mm	
RF-50 KL*	100 ... 500 mm	100 ... 500 mm	≥ 0,2 mm	RF-50 KL*	0 ... 800 mm	

www.sensopart.com/en/accessories