


Product availability: Non-Stock - Not normally stocked in distribution facility

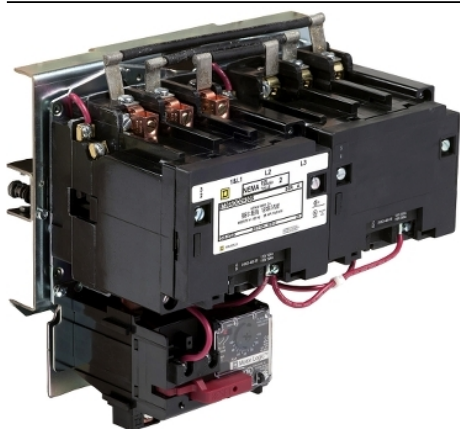

### Main

Product	Starter
Type	S
Control Circuit Type	Separate control circuit

### Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Starter Type	Reversing
Number of Poles	3P
Phase	3 phase
Current Rating	45 A
Horsepower Rating	10 HP 200 V AC 15 HP 230 V AC 25 HP 460 V AC 25 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Solid state Motor Logic class 10/20
Electrical connection	Screw clamp terminals
NEMA size	2
Height	8.50 in (216 mm)
Depth	6.02 in (153 mm)
Width	9.02 in (229 mm)


### Environment

Enclosure Type	Not rated (open device)
Orientation	Horizontal
Product certifications	CSA UL listed NEMA

### Ordering and shipping details

Category	21272 - 8702,36 SC,SD(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901970293
Package weight(Lbs)	15.88 kg (35 lb(US))
Returnability	No
Country of origin	MX

## Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to <a href="http://www.p65warnings.ca.gov">www.p65warnings.ca.gov</a>
EU RoHS Directive	Not compliant
China RoHS Regulation	 <a href="#">China RoHS Declaration</a>

## Contractual warranty

Warranty	18 months
----------	-----------