


“GX” Clamps



- “GX” clamp is entirely drop forged and heat treated.
- Can be used for both vertical and horizontal-to-vertical lifting.
- Exclusive feature is a patented wear indicator system. When any of cam’s straight line, convex teeth are flattened between unique wear indicator grooves, it is time to change the cam.
- Shackle and “G” link combined into one part for fewer stress points and less chance of side loading damage.
- 100% proof tested with certificate of test attached to each clamp.
- **Note: The Pad and Cam should be replaced at the same time.**
- Clamps are 100% Proof Tested and Certificate of Test supplied with each clamp.

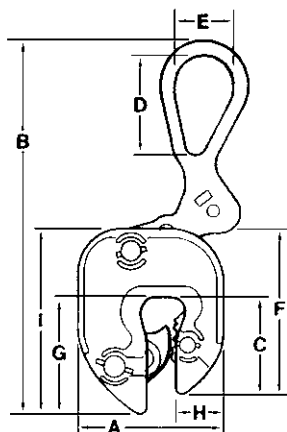

Code No.	Grip Range		Clamp Weight		Working Load Limit Metric Ton
	in.	mm	lb	kg	
6423000	1/16 - 5/8	1 - 16	4	2	1/2
6423005	1/16 - 3/4	1 - 19	8	4	1
6423923	3/4 - 1 3/8	19 - 35	9	4	1
6423010	1/16 - 1	1 - 25	17	8	3
6423015	1/2 - 2	13 - 51	40	18	5

Code No.	Dimensions																	
	A		B		C		D		E		F		G		H		I	
	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm	in.	mm
6423000	4	102	9 1/2	241	2 3/16	56	2 3/4	67	2	51	4 1/8	105	2 7/8	73	1 3/8	35	4 7/8	124
6423005	4 3/4	121	11 1/4	286	3 1/16	78	3 1/16	78	2 1/16	52	5 1/4	133	3 5/8	92	1 5/8	41	5 7/8	149
6423923	5 7/8	149	11 1/4	286	3 1/16	78	3 1/16	78	2 1/16	52	5 1/4	133	3 5/8	92	1 5/8	54	5 7/8	149
6423010	6	152	14	356	3 9/16	90	3 13/16	97	3	76	6 3/4	171	4 7/16	113	2	51	7 5/8	194
6423015	8 7/8	225	20	508	4 11/16	119	5	127	3 15/16	100	8 3/4	219	5 15/16	151	3 13/16	97	9 15/16	252

WARNING

- Select proper size clamp for the job.
- Determine the weight of the plate to be lifted.
- Do not exceed WLL (Working Load Limit) shown on clamp.
- Plate thickness must be within grip range shown on clamp.