Product data sheet
Characteristics

8736SEO2V02H30S
Reversing Starter Size 3, 3-Pole, Motor Logic SSOLR +Options

Product availability: Non-Stock - Not normally stocked in distribution facility

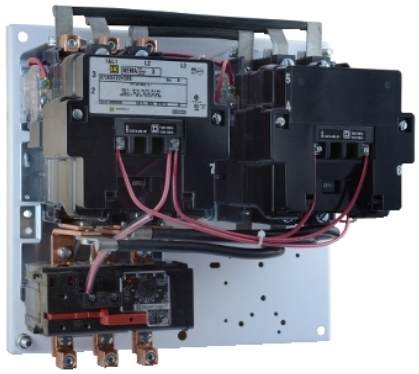

Main

Product	Starter
Type	S
Control Circuit Type	Separate control circuit

Complementary

Control Circuit Voltage	110 V AC 50 Hz 120 V AC 60 Hz
Starter Type	Reversing
Number of Poles	3P
Phase	3 phase
Current Rating	90 A
Horsepower Rating	25 HP 200 V AC 30 HP 230 V AC 50 HP 460 V AC 50 HP 575 V AC
Maximum Voltage Rating	600 V AC
Control Units	No control units
Thermal overload type	Solid state Motor Logic class 10/20
Electrical connection	Screw clamp terminals
NEMA size	3
Height	11.73 in (298 mm)
Depth	7.01 in (178 mm)
Width	12.72 in (323 mm)

Environment

Enclosure Type	Not rated (open device)
Orientation	Horizontal
Product certifications	CSA UL listed NEMA

Ordering and shipping details

Category	21273 - 8702,36 SE,SF(NOT S*R,T,W)
Discount Schedule	CP1
GTIN	00785901956020
Package weight(Lbs)	16.25 kg (35.83 lb(US))
Returnability	No
Country of origin	MX

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Offer Sustainability

California proposition 65	WARNING: This product can expose you to chemicals including: Lead and lead compounds which is known to the State of California to cause Carcinogen & Reproductive harm. For more information go to www.p65warnings.ca.gov
EU RoHS Directive	Not compliant
China RoHS Regulation	China RoHS Declaration

Contractual warranty

Warranty	18 months