


# Bus Drop Cable Supports and Clamps





## Applications

- “Bus-Drop” cable clamps designed for exposed branch feeder installations.
- Supports cable in flexible connecting circuits used to feed equipment. Cable is run in fixed overhead bused structures to a point directly above equipment then dropped with a 90° bend. At the point of drop, the cable clamp is installed to support the cable.
- Mooring cable clamps are used to attach a guy wire to the cable where it leaves bus structure, thus preventing wire terminal strain and possible conductor breakage.

## Features

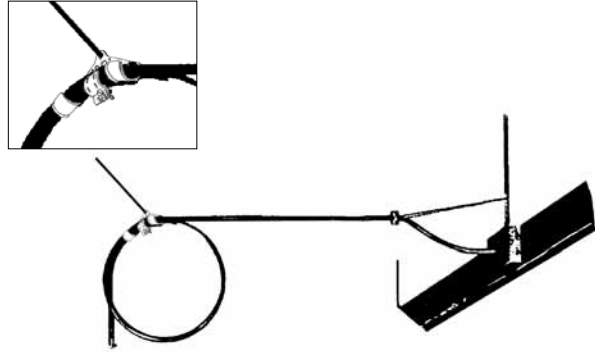- Clamps provide maximum versatility of installation where equipment is likely to be moved from one location to another. Installation is fast and modification is simple.
- One clamp covers entire range of cable sizes and can be used for one 90° bend.
- Two clamps, back to back, allow for an additional loop providing extra cable footage when a machine is likely to be moved.



	Catalog Number	Cable Range (Inches/Millimeters)	Wt. Lbs./Kgs. Per 100
<b>“Bus-Drop” Cable Clamps and Strap</b>			
	<b>BD-1</b>	0.40 - 1.19/ 10.2 - 30.2	59.00/26.76
	<b>BD-1D</b>	0.40 - 1.19/ 10.2 - 30.2	118.00/53.52
	<b>BD-1A</b>	0.40 - 1.19/ 10.2 - 30.2	52.00/23.59
	<b>BD-1B</b>	0.40 - 1.19/ 10.2 - 30.2	9.00/4.08
<b>“Bus-Drop” Mooring Cable Clamps</b>			
	<b>BDM-1</b>	0.40 - 0.88/ 10.2 - 22.4	17.00/7.71
	<b>BDM-2</b>	0.88 - 1.19/ 22.4 - 30.2	34.00/15.42