

Cable Connectors

For Armored Cable & Flexible Metal Conduit

Type AC

45° Angle Squeeze Connectors

Use:

To ground and secure Armored Cable and Flexible Metal Conduit to boxes and enclosures.

Features:

- Male hubs - NPS.
- Provided with center stop.
- Available with insulated throats.
- Furnished with locknuts
- Also suitable for NM and SE cable

Material/Finish:

Malleable Iron/Zinc Electroplated

Third Party Certification:



UL Listed: E-11852


UL Listed for armored cable and flexible steel conduit.

UL Listed flexible metal conduit fittings are suitable for use in Hazardous Location under NEC 501-4(b) Class I Div. II, and suitable as a grounding means under NEC 350-5.




CSA Certified: 9795.

CSA Certified for armored cable.



Type AC-38

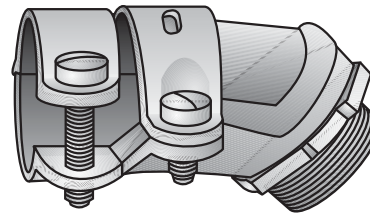

Type AC-50

| Trade Size (inches) | Catalog Number | Insulated Throat Catalog Number | Body Length | Dimensions in Inches | | |
|-----------------------------------|-------------------|--|------------------|----------------------|------------------|-----------------------------------|
| | | | | Thread Length | Max. Width | Flex. Opening |
| $\frac{3}{8}$ ($\frac{1}{2}$ KO) | AC-38 | AC-38T | $1\frac{3}{8}$ | $\frac{7}{16}$ | $1\frac{1}{4}$ | $\frac{17}{32}$ - $\frac{39}{64}$ |
| $\frac{1}{2}$ | AC-50 | AC-50T | $1\frac{15}{16}$ | $\frac{7}{16}$ | $1\frac{11}{16}$ | $\frac{29}{32}$ - $\frac{15}{16}$ |
| $\frac{3}{4}$ | AC-75 | AC-75T | $2\frac{1}{8}$ | $\frac{1}{2}$ | $1\frac{3}{4}$ | $\frac{29}{32}$ - $1\frac{1}{16}$ |

Applicable Third Party Standards:

UL Standard: 514B

CSA Standard C22.2 No. 18

Fed. Spec: W-F-406E

NEMA: FB-1

Type 25-38C

Duplex Connector

Use:

To ground and secure two Armored Cables to boxes and enclosures.

Features:

- For armored cable 14/2 to 10/2 or combination of sizes
- Furnished with locknuts.
- Male hubs-NPS

Material/Finish:

Malleable Iron/Zinc Plated

Third Party Certification:



UL Listed: E-11852

UL Listed flexible metal conduit fittings are suitable for use in Hazardous Locations under NEC 501-4(b) Class I Div. II, and suitable as a grounding means under NEC 350-5.



CSA Certified: 9795

Applicable Third Party Standards:


UL Standard: 514B

CSA Standard C22.2 No. 18

Fed. Spec: W-F-406E

NEMA: FB-1

| Trade Size (inches) | Catalog Number | Body Length | Dimensions in Inches | | |
|-----------------------------------|-------------------|-----------------|----------------------|-----------------|----------------------------------|
| | | | Thread Length | Max. Width | Flex. Opening |
| $\frac{3}{8}$ ($\frac{1}{2}$ KO) | 25-38C | $1\frac{1}{16}$ | $\frac{7}{16}$ | $1\frac{9}{16}$ | $\frac{7}{32}$ - $\frac{17}{32}$ |



Type 25-38C