

Set-Screw AnyBODY™ Conduit Bodies for EMT or Rigid

Copper-free aluminum die-cast. Five conduit bodies in one! Ships as an LB, but converts to a T, LL, LR, or C. Switch covers and flanges as needed to create the style you need.




For set-screw sizes 1/2" - 2" see page H-1.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	CUBIC INCHES	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
16	16400	2-1/2	175.50	1	1	14.340	6.390	4.800
17	16401	3	175.50	1	1	14.340	6.400	4.800
18	16402	3-1/2	334.00	1	1	16.840	7.330	5.840
19	16403	4	334.00	1	1	16.840	7.330	5.840

Refer to page H-2 for flange illustration.

PATENTED.

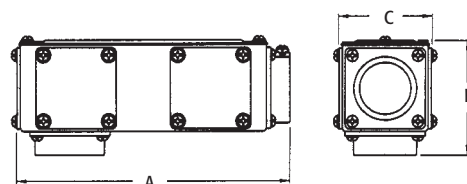

FEATURES AND BENEFITS

- Meets NEC 2014 Section 314.16 Paragraph (C) (2) for conduit bodies with splices, taps, or devices
- Convenient and easy to use
- Saves the time, space, and cost of stocking five different conduit bodies (LB, T, LL, LR, C)
- Includes flanges for three openings
- Volume and wire fill marked inside bodies
- Recessed O-rings under covers and flanges

16
2-1/2" AnyBODY
Converted from LB
to LR

Set-screw Flange Cover Plate

1. Remove cover plate.
2. Remove set-screw flange.
3. Reinstall cover plate and flange in the appropriate opening to convert AnyBODY to the desired configuration.

Service Entrance SLB Conduit Bodies

With aluminum cover and velumoid gasket. Copper-free aluminum die-cast.



Threaded for IMC or rigid.

CATALOG NUMBER	UPC/DCI/NAED MFG #018997	TRADE SIZE	UNIT PKG	STD PKG	DIM A	DIM B	DIM C
920SLB	92013	1/2	10	10	3.155	1.450	1.178
921SLB	92113	3/4	10	10	3.470	1.650	1.360
922SLB	92213	1	5	5	4.180	1.915	1.723
923SLB	92313	1-1/4	5	5	5.515	2.320	2.164
924SLB	92413	1-1/2	2	2	6.095	2.410	2.420
925SLB	92513	2	2	10	6.595	2.975	2.835

