



Exit & Emergency

ERD Series Architectural Emergency Light



SPECIFICATIONS:

Construction:

- Decorative, low-profile, architectural design
- Long-life, efficient ultra-bright white LED
- Mirror-bright reflector and prismatic polycarbonate refractor
- Die-cast aluminum housing
- Durable powder-coated finish
- Sealed and gasketed

Electrical:

- 120/277 VAC Dual Rated
- Charge rate/power "ON" LED indicator light and push to test switch for mandated code compliance testing
- 4.8V long-life, maintenance-free, rechargeable NiCd battery
- Internal solid-state transfer switch automatically connects the internal battery to LED board for minimum 90-minute emergency illumination
- Fully automatic solid-state, two-rate charger initiates battery charging to recharge a discharged battery in 24 hours
- Photocell sensor included as a standard
- Cold-weather unit for use in temperatures as low as -30°C

Listings:

Luminaire is certified to UL/cUL Standards for Wet Locations

Temperatures:

Min Start: -20°C Max: 40°C

Warranty:

Atlas Lighting Products provides a 5 year limited warranty for this product. A full warranty can be found at www.alpinc.com.

Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80.

Installation:

Surface mount via easy connect back plate that fits most standard size junction boxes

Universal K/O pattern on back plate for wall mount

Project Information

Job Name


Fixture Type Architectural Emergency Light

Catalog Number ERD12BZ

Approved by



DIMENSIONS:

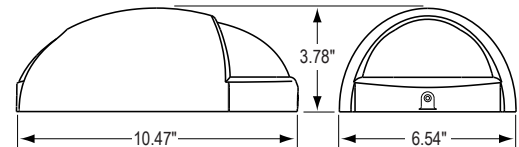

ORDERING INFORMATION

CATALOG #	DESCRIPTION	FINISH	VOLTS
ERD12BZ	Architectural LED Emergency Light w/ Photocell	Bronze	120/277

ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216
800-849-8485 | FAX: 1-855-847-2794 | www.atlasled.com