



IP65 RATED

IP66 RATED

IP67 RATED

IP69K RATED

ILW76LED2WD ILW98LED2WD ILW130LED2WD

LUMENS: 10,620	LUMENS: 13,850	LUMENS: 16,980
WATTS: 76	WATTS: 98	WATTS: 130
LpW: 152	LpW: 145	LpW: 132
CRI: 82	CRI: 82	CRI: 84
CCT: 4500K	CCT: 4500K	CCT: 4500K
DIMMING: 10-100%	DIMMING: 10-100%	DIMMING: 10-100%



Ordering Information

CATALOG #	DESCRIPTION	VOLTS
ILW76LED2WD	2' 76W LED Wet Location w/ Glare Free Lens	120-277
ILW98LED2WD	2' 98W LED Wet Location w/ Glare Free Lens	120-277
ILW130LED2WD	2' 130W LED Wet Location w/ Glare Free Lens	120-277


Options

SUFFIX #	DESCRIPTION
3C*	3' Cord (No Plug)
EB	Emergency Back-Up

*Also Available in 6', 10' and 20' length

Dimensions and Specifications

Overall Height: 5.8"
Overall Width: 14.5"
Length: 26.6"

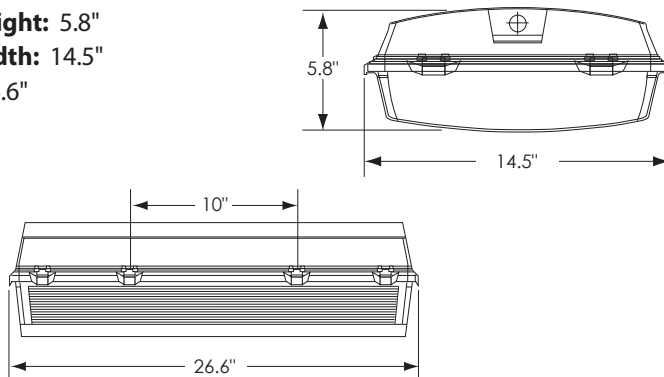


Accessories

CATALOG #	DESCRIPTION
MS360WL	Wet Location 360° Motion Sensor
80-271CMB	Ceiling Mount Bracket



Ambient Temperature Fixture Rating

PART #	DESCRIPTION	12" CHAIN MOUNT
ILW76LED2WD	2' 76W LED Wet Location w/ Glare Free Lens	45°C (113°F)
ILW98LED2WD	2' 98W LED Wet Location w/ Glare Free Lens	45°C (113°F)
ILW130LED2WD	2' 130W LED Wet Location w/ Glare Free Lens	45°C (113°F)



For more information including photometrics, Lighting Facts and DLC visit www.atlasled.com

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

