




Wrenches

ADJUSTABLE HOOK SPANNER WRENCH


- Non-reflective ProtoBlack™ finish for use where non-plated products are required.
- Use to tighten side slot nuts on collars, lock nuts and bearings.

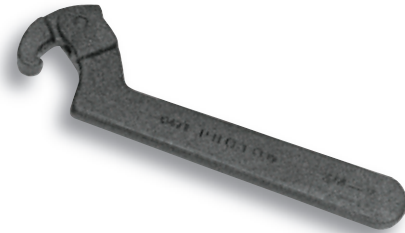

Product ID No.	Diameter Capacity	Hook Thickness D	Hook Depth C	L	Weight lbs.
JC471	3/4" to 2"	11/32"	1/8"	6-3/8"	0.23 lbs.
JC472	1-1/4" to 3"	13/32"	5/32"	8-1/8"	0.43 lbs.
JC474	2" to 4-3/4"	15/32"	3/16"	11-3/8"	1.03 lbs.
JC474A	4-1/2" to 6-1/4"	15/32"	1/4"	12-1/8"	1.07 lbs.
JC474B	6-1/8" to 8-3/4"	15/32"	5/16"	13-3/4"	1.40 lbs.

FACOM® HEAVY DUTY HOOK SPANNER WRENCHES

- Satin finish provides corrosion resistance and a slip resistant grip.
- Hook design is used to tighten side slots on collars, lock nuts and bearings.
- Worm gear design allows for precision adjustments.

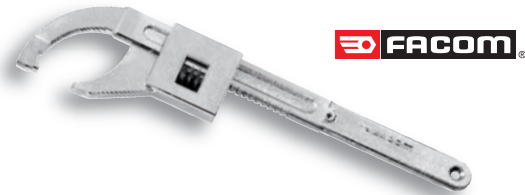

Product ID No.	Description	Length	Width	Height	Weight lbs.	Min Opening	Max Opening
FA-115A.50	Wrench Precision Hook Spanner 1-15/16"	20-7/8"	2-5/32"	31/32"	0.83 lbs.	3/8"	1-31/32"
FA-115A.100	Wrench Precision Hook Spanner 3-15/16"	8-15/32"	3-3/4"	25/32"	1.96 lbs.	25/32"	3-15/16"
FA-115A.200	Wrench Precision Hook Spanner 7-7/8"	14-3/8"	6-1/2"	25/32"	4.57 lbs.	1-3/16"	7-7/8"

ADJUSTABLE PIN SPANNER WRENCH

- Non-reflective ProtoBlack™ finish for use where non-plated products are required.
- Precision machined pins provide engagement with side holes or slots.
- Used to tighten side slot nuts on collars, lock nuts and bearings.



Product ID No.	Maximum Capacity	Diameter of Pin B	Length of Pin C	Hook Thickness D	L	Weight lbs.
JC491	3/4" to 2"	1/8"	1/8"	11/32"	6-3/8"	.23 lbs.
JC492	3/4" to 2"	3/16"	5/32"	11/32"	6-3/8"	.23 lbs.
JC494	1-1/4" to 3"	3/16"	3/16"	13/32"	8-1/8"	.42 lbs.
JC495	1-1/4" to 3"	1/4"	7/32"	13/32"	8-1/8"	.42 lbs.
JC497	2" to 4 3/4"	1/4"	1/4"	15/32"	11-3/8"	.99 lbs.
JC499	4-1/2" to 6-1/4"	3/8"	1/4"	15/32"	12-1/8"	1.08 lbs.

