


LTR	REVISION	DATE	APPD
B	041516-GP01: ADDED MISSING DATA	04-19-16	GP

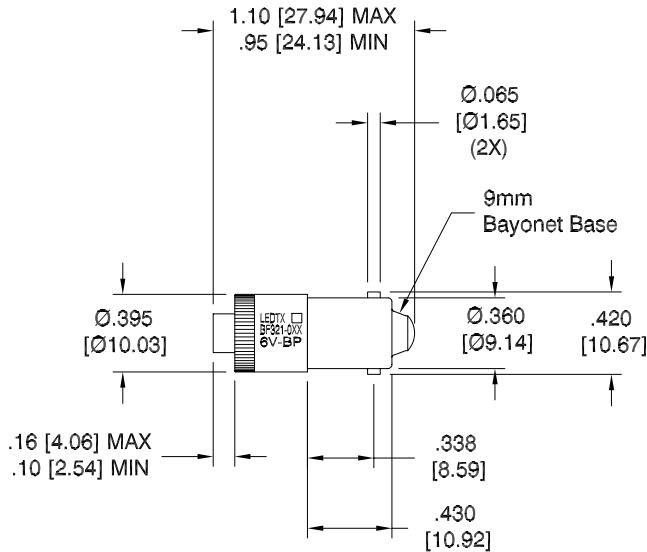

NOTES:

1. ALL DIMENSIONS ARE IN INCHES [MILLIMETERS].
2. SLEEVE MATERIAL: GENERAL POLYMERS RYNITE FR530 (UL 94HB)
3. BASE MATERIAL: BRASS, NICKEL-PLATED
4. OPERATING TEMPERATURE: ~-30°C TO ~+50°C

**FULL BEAM WIDTH @ 50% INTENSITY



REVISION NOTIFICATION

DLC

UL/ETL

MADE IN USA

CUSTOMER _____

OTHER _____

ELECTRICAL - OPTICAL CHARACTERISTICS (Ta = 25°C)

BF321-0AG-006B	AQUA GREEN	6Vdc	0.09 W	0.015 A	0.400cd	520	-	85°	BipolarDC(+/-)
BF321-0CW-006B	COOL WHITE	6Vdc	0.09 W	0.015 A	0.825cd	-	8000K	95°	BipolarDC(+/-)
BF321-0ER-006B	SUPER RED	6Vdc	0.12 W	0.020 A	-	630	-	90°	BipolarDC(+/-)
BF321-0IW-006B	WARM WHITE	6Vdc	0.09 W	0.015 A	0.130cd	-	3000K	110°	BipolarDC(+/-)
BF321-0PB-006B	SUPER BLUE	6Vdc	0.09 W	0.015 A	0.116cd	465	-	85°	BipolarDC(+/-)
BF321-0UG-006B	SUPER GREEN	6Vdc	0.12 W	0.020 A	0.058cd	573	-	90°	BipolarDC(+/-)
BF321-0UO-006B	SUPER ORANGE	6Vdc	0.12 W	0.020 A	-	610	-	95°	BipolarDC(+/-)
BF321-0UR-006B	ULTRA RED	6Vdc	0.12 W	0.020 A	0.115cd	652	-	80°	BipolarDC(+/-)
BF321-0UY-006B	SUPER YELLOW	6Vdc	0.12 W	0.020 A	0.116cd	593	-	85°	BipolarDC(+/-)

LEDTRONICS PART NO.	COLOR EMITTED	INPUT VOLTAGE, V	POWER (W)	CURRENT (A)	MAXIMUM CANDELA	λ P nm	COLOR TEMP. (Kelvin)	VIEWING ANGLE**	CENTER CONTACT POLARITY
---------------------	---------------	------------------	-----------	-------------	-----------------	--------	----------------------	-----------------	-------------------------



-PROPRIETARY-
 This document contains Proprietary information of LEDTRONICS, INC. It may not be copied, used or disclosed for any purpose without the prior express written consent of LEDTRONICS, INC.

.XXX ± .010 TOLERANCE PER ANSI-Y14.5
 .XX ± .025 (UNLESS OTHERWISE STATED)
 ANGLES ± 0°,30'
 FRACT. ± 1/32

TITLE BF321-0XX-006B					
DWG NO BF321-6V-BP		SCALE 1:1	SHEET 1 OF 1	DATE 11-10-09	
CODE IDENT NO. 8Z410	DWG BY GP 11-10-09	CHK BY	QA EE 06-06-16	MFG LD 06-06-16	R&D LUV 06-03-16