

# Circuit Breaker Lockout

## EZ Panel Loc™ System

- Works on wide range of breakers, including single- and multi-pole configurations
- Can be used with most padlocks by making use of unique lock rail system
- Allows panel door to be closed even when lockouts are in place
- Accommodates multiple locks, facilitating group lockout activity without hasps
- Keeps weight off the breakers, protecting delicate electrical components from damage
- Positions locks and tags outside the panel, making sure lockout activity is clearly visible to anyone in the area
- Patent No. 6,727,441

(Not recommended for use with multilock hasps)

### Technical Information

- Lockout devices constructed of high-impact Isoplast polymers
- Cables are 2-ft. in length
- Lock rails made of durable isoplast polymers with acrylic adhesive backing
- Lock rails available in 4" or 8" lengths (with 7 or 15 lock loops)

## How EZ Panel Loc System Works



Lockout device is unlocked by inserting and turning the black plastic key.



1. Expose the super-bond adhesive on back of rail. Permanently affix to any location on the panel.



2. Attach the lockout device to the breaker and snap into locked position.



3. Pass plastic key through lock rail and attach lock, preventing key from sliding down cable and opening lockout device.



4. For group lockouts, run key through multiple loops in lock rail and apply locks. No hasps required! (Not recommended for use with multilock hasps)



5. Low-profile lockouts allow panel doors to be closed on most breaker panels.

## Covers Most 120V – 277V Breakers!

The EZ Panel Loc™ System comes in two different styles, accommodating an exceptionally wide range of breaker models.

### SNAP-ON




For use on Square D NQO and other breakers that have a hole in the switch tongue. Just align pins with hole and snap closed. Pins prevent switch from being thrown.



### CLAMP-ON



For use on breakers that do not have a hole in the switch tongue. Turn thumbscrew to clamp lockout securely onto switch, then snap the cover closed to prevent thumbwheel from being loosened.

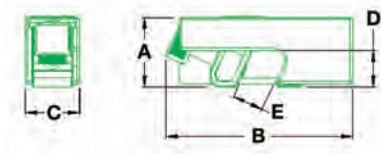

	Outer Dimensions (in.)			Switch Clearance (in.)	
	A	B	C	D	E
Snap-On Style	0.90"	1.88"	0.74"	0.40"	0.35"
Clamp-On Style	0.95"	2.56"	0.74"	0.35"	0.42"

Description	1 Per Pkg	6 Per Pkg
Snap-On Lockout Device	51252	65815
Clamp-On Lockout Device	51254	65810
4" Lock Rail	51256	65814
8" Lock Rail	51258	51260

## EZ Panel Loc™ Accessories



### Spacing Gasket

- For low profile panels, gasket pushes out the panel frame adding an additional 3/8" of clearance between the panel and the door
- Easy install with self-adhesive backing
- Dimensions: 3/8"D x 1"W x 15'L

### Catalog # Description

89256 EZ Panel Loc™ Spacing Gasket