


UL 508 Enclosed Non-Fused Disconnects—16 to 80A

3-/6-Pole UL 508 600Vac

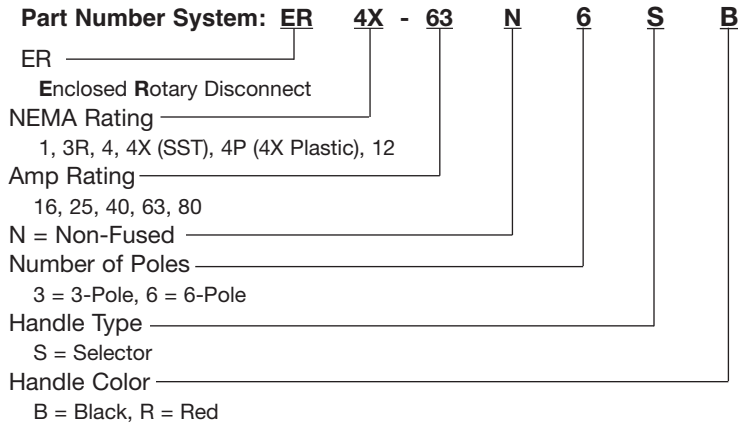

Part Numbers - All part numbers provided with a black selector handle. Order red/yellow handle by changing the suffix "B" to "R."

UL General Purpose Amp Rating	No. of Poles	NEMA Enclosure Type & Part Number					
		1	3R	4	4X Plastic ⁽¹⁾	4X Stainless	12
16	3	ER1-16N3SB	ER3R-16N3SB	ER4-16N3SB	ER4P-16N3SB	ER4X-16N3SB	ER12-16N3SB
	6	ER1-16N6SB	ER3R-16N6SB	ER4-16N6SB	ER4P-16N6SB	ER4X-16N6SB	ER12-16N6SB
25	3	ER1-25N3SB	ER3R-25N3SB	ER4-25N3SB	ER4P-25N3SB	ER4X-25N3SB	ER12-25N3SB
	6	ER1-25N6SB	ER3R-25N6SB	ER4-25N6SB	ER4P-25N6SB	ER4X-25N6SB	ER12-25N6SB
40	3	ER1-40N3SB	ER3R-40N3SB	ER4-40N3SB	ER4P-40N3SB	ER4X-40N3SB	ER12-40N3SB
	6	ER1-40N6SB	ER3R-40N6SB	ER4-40N6SB	ER4P-40N6SB	ER4X-40N6SB	ER12-40N6SB
63	3	ER1-63N3SB	ER3R-63N3SB	ER4-63N3SB	ER4P-63N3SB	ER4X-63N3SB	ER12-63N3SB
	6	ER1-63N6SB	ER3R-63N6SB	ER4-63N6SB	ER4P-63N6SB	ER4X-63N6SB	ER12-63N6SB
80	3	ER1-80N3SB	ER3R-80N3SB	ER4-80N3SB	ER4P-80N3SB	ER4X-80N3SB	ER12-80N3SB
	6	ER1-80N6SB	ER3R-80N6SB	ER4-80N6SB	ER4P-80N6SB	ER4X-80N6SB	ER12-80N6SB

(1) Polycarbonate enclosure flammability rating UL 94-5VA-V0.

Switch Ratings - for wire types, ranges and tightening torques, see table on page 413

Switch Amp Rating	Disconnect Switch	Voltage		SCCR with Max Upstream Class J Fuse	Max Hp Rating @ 600Vac
		Vac	Vdc		
16	RD16-3-508	600	N/A	65kA / 30A	10
25	RD25-3-508			65kA / 30A	20
40	RD40-3-508			65kA / 30A — 10kA / 60A	25
63	RD63-3-508			65kA / 60A — 50kA / 100A	40
80	RD80-3-508			65kA / 60A — 50kA / 100A	40

Note: Voltage, SCCR and Horsepower ratings are the same for 3- and 6-pole UL 508 non-fused disconnect switches.