



## Straight Fittings

- For Use with Carflex® conduit and Carflex® X-Flex™ conduit

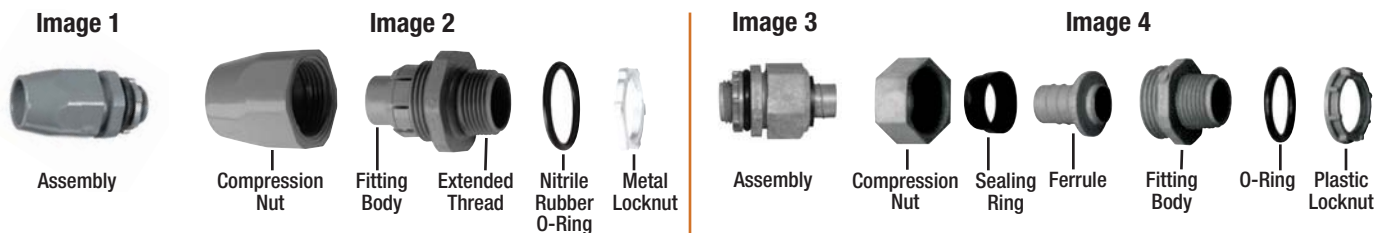


## Features


- Non-conductive and non-corrosive
- Easy to install
- Resistant to oil, acid, ozone and alkaline
- Approved for indoor and outdoor locations
- Listed for "Wet locations"
- Nitrile rubber "O" ring for a liquidtight termination
- Temperatures up to 107°C

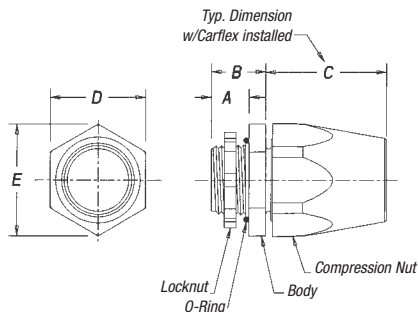

LT43C-CAR, LT43D-NEW, LT43E-NEW, LT43F

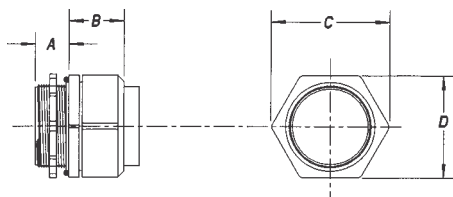

LT43G, LT43H

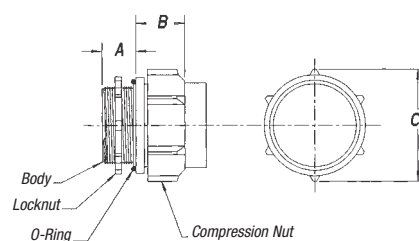

LT43J

## Specifications



Cat. No.	Size (in.)	Std Ctn Qty	Std Ctn Wt. (lb)	Dimensions (in.)					Refer to Image
				A	B	C	D	E	
LT43C	3/8	50	3.6	0.55	0.75	1.60	1.30	1.40	1-2
LT43D-NEW	1/2	50	4.2	0.56	0.91	1.62	1.30	1.40	1-2
LT43E-NEW	3/4	50	6.6	0.56	0.91	1.88	1.61	1.71	1-2
LT43F-NEW	1	25	5.5	0.70	1.00	2.20	1.90	2.04	1-2
LT43G	1-1/4	5	1.5	0.71	1.16	2.50	2.17	-	3-4
LT43H	1-1/2	5	2.0	0.75	1.36	2.78	2.43	-	3-4
LT43J	2	5	2.5	1.00	1.45	3.33	-	-	3-4