



CABLE PULLING PRODUCTS from erin rope corporation

WOVEN POLYESTER CABLE-PULLING TAPE

- High tensile strength, low stretch
- Printed sequential footage markings for accurate measurements
- Easily blown through conduits or ducts
- Available with or without detectable tracer wire


Woven Polyester Cable-Pulling Tape

Part Number	Tensile Strength (lbs.)	Approximate Width (in.)	Length (ft.)
WP12500500	1,250	1/2	500
WP12501500	1,250	1/2	1,500
WP12503000	1,250	1/2	3,000
WP12505000	1,250	1/2	5,000
WP18000500	1,800	5/8	500
WP18001500	1,800	5/8	1,500
WP18003000	1,800	5/8	3,000
WP18005000	1,800	5/8	5,000
WP25000500	2,500	3/4	500
WP25001500	2,500	3/4	1,500
WP25003000	2,500	3/4	3,000
WP25005000	2,500	3/4	5,000

Longer lengths available, up to 100,000 ft.



Woven Polyester Cable-Pulling Tape

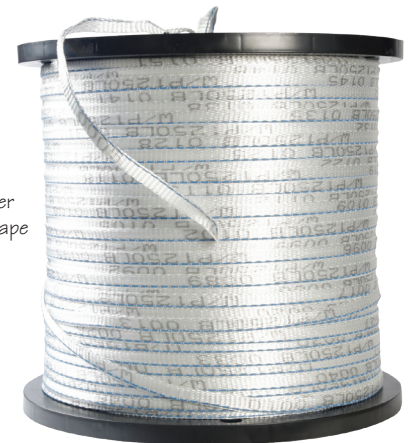

Detectable Woven Polyester Cable-Pulling Tape

DETECTABLE WOVEN POLYESTER CABLE-PULLING TAPE

- Provides a reliable means of locating cable in conduit
- Sequentially footage marked

Detectable Woven Polyester Pulling Tape - 22 Gauge Conductor


Part Number	Tensile Strength (lbs.)	Approximate Width (in.)	Length (ft.)
WPD12503000	1,250	1/2	3,000
WPD12505000	1,250	1/2	5,000
WPD18003000	1,800	5/8	3,000
WPD18005000	1,800	5/8	5,000
WPD25003000	2,500	3/4	3,000
WPD25005000	2,500	3/4	5,000

CONDUIT MEASURING TAPE

- Sequential footage marks from 1-3,000 ft.
- Allows for fishing and measuring conduit runs in one easy step

Conduit Measuring Tape

Part Number	Tensile Strength (lbs.)	Length (ft.)
WPC130	130	3/16" x 3000

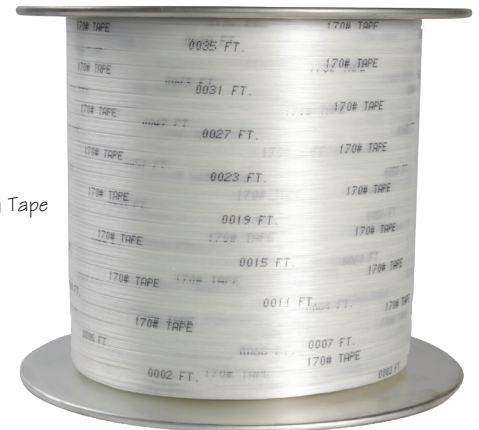

Conduit Measuring Tape

Call 708-377-1084 for Same Day Shipment!



erin rope corporation

2661 West 139th Street • Blue Island, IL 60406

708-377-1084 • Fax 708-377-1094

email: sales@erinrope.com

web: www.erinrope.com



erIn ROPE: Leader in Quality CABLE PULLING Rope and Tape

COMPOSITE DOUBLE BRAID*

- High strength, low stretch
- Excellent resistance to UV rays, chemicals, abrasion
- Factory spliced pulling eye at each end

Composite Double Braid					
Part Number	Diameter (inches)	Circumference (inches)	Tensile Strength (lbs.)	Length (ft.)	Lbs. per 100 ft.
CDB080600	1/4	3/4	1,550	600	2
CDB081200	1/4	3/4	1,550	1,200	2
CDB120600	3/8	1-1/8	5,000	600	4.5
CDB121200	3/8	1-1/8	5,000	1,200	4.5
CDB140600	7/16	1-1/4	7,500	600	6.1
CDB141200	7/16	1-1/4	7,500	1,200	6.1
CDB160600	1/2	1-1/2	9,500	600	8.1
CDB161200	1/2	1-1/2	9,500	1,200	8.1
CDB180600	9/16	1-3/4	16,150	600	10
CDB181200	9/16	1-3/4	16,150	1,200	10
CDB200600	5/8	2	18,000	600	13
CDB201200	5/8	2	18,000	1,200	13
CDB240600	3/4	2-1/4	26,000	600	18
CDB241200	3/4	2-1/4	26,000	1,200	18
CDB280600	7/8	2-3/4	32,000	600	25
CDB281200	7/8	2-3/4	32,000	1,200	25
CDB320600	1	3	42,000	600	32
CDB321200	1	3	42,000	1,200	32

*CUSTOM LENGTHS AVAILABLE UPON REQUEST

**AVAILABLE UP TO 1 1/2" IN DIAMETER



Composite Double Braid



3-1 Pull-Tape

3-IN-1 PULL TAPE

- 3-in-1: thread, measure, and pull
- Sequential footage markings
- Easy center pull bucket
- Reduce tension at start of pull
- Low stretch

3-in-1 Pull Tape						
Part Number	Tensile Strength (lbs)	Typical Bowline Strength (lbs)	Typical Knot Strength (lbs)	Pail Quantity (ft)	Approx Pail Weight (lbs)	Pails Per Pallet
WPB4004500	400	190	300	4,500	13	48
WPB12502100	1,250	595	940	2,100	12	48
WPB18001300	1,800	830	1,400	1,300	14	48
WPB2500750	2,500	1,190	1,875	750	21	48

SPIRAL WRAPPED LIGHT DUTY POLY TWINE

- Ideal for many types of pulls, including pulling rope through conduit
- Will not rot, mildew or rust
- Can be left in conduit for future use
- Ships in plastic pail for ease of use and storage

Spiral Wrapped Light Duty Poly		
Part Number	Tensile Strength (lbs.)	Length (ft.)
SRPT0500C	210	500
SRPT6500B	210	6,500
SRPT2200B	500	2,200



Spiral Wrapped Light Duty Poly Twine