



SPECIAL PURPOSE PLIERS

Features


- Strips wire with no damage to conductor.
- Crimps insulated and non-insulated wire.
- Cuts AWG 10-22
- Cuts bolt sizes: 10-24, 6-32, 8-32, 10-32, 4-40
- Crimps coax cable
- Crimps 7-8mm ignition terminals
- Dénude le fil sans endommager le conducteur.
- Sertit les fils isolés et non-isolés.
- Coupe les câbles AWG 10-22
- Coupe les boulons de taille 10-24, 6-32, 8-32, 10-32, 4-40
- Sertit les câbles coaxiaux
- Sertit les bornes d'allumage de 7 à 8 mm
- Desforra alambres sin daño alguno al conductor.
- Poncha alambres aisladas y no aisladas.
- Corta AWG 10-22
- Corta pernos de dimensiones: 10-24, 6-32, 8-32, 10-32, 4-40
- Poncha el cable coaxial
- Poncha los terminales de ignición de 7-8 mm

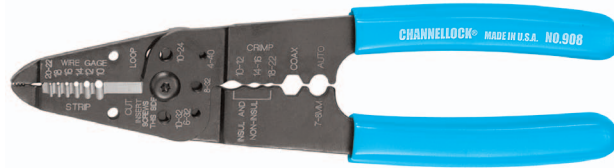

PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
908	8.25	209.55	1.68	42.67	0.34	8.64	1.48	37.59	0.49	12.45	2.18	55.37	0.48	217.72

Features

- Retaining ring pliers
- Converts from internal to external rings with simple switch of the red tab.
- 929 – External: 1 1/2" to 4", Internal: 1 13/16" to 4" Includes tips: .090, .108, .120 15° and .090, .108, .120 90°
- 927 – External: 1/4" to 2", Internal: 3/8" to 2" Includes tips: .036, .047, .070 straight and .036, .047 90°
- 926 – External: 1/8" to 1", Internal: 1/4" to 1" Includes tips: .023, .036, .047 straight and .036, .047 90°
- Pince pour anneau élastique
- Convertissable de circlips intérieur à circlips extérieur en déplaçant simplement le bouton rouge.
- 929 – Circlips extérieurs : 38.1 à 101.6 mm, intérieurs : 46.04 à 101.6 mm. Comprend les embouts suivants : 2.29, 2.74, 3.05 mm coudés à 15° et 2.29, 2.74, 3.05 mm coudés à 90°
- 927 – Circlips extérieurs : 6.35 à 50.80 mm, intérieurs : 9.53 à 50.80 mm. Comprend les embouts suivants : 0.91, 1.19, 1.78 mm droits et 0.91, 1.19 mm coudés à 90°
- 926 – Circlips extérieurs : 3.18 à 25.40 mm, intérieurs : 6.35 à 25.40 mm. Comprend les embouts suivants : 0.58, 0.91, 1.19 mm droits et 0.91, 1.19 mm coudés à 90°
- Pinza para anillo de retención
- Convierte para usarse en anillos internos o externos con un simple cambio de la lengüeta roja.
- 929: Externos: 38.1 a 101.6 mm; Internos: 46.04 a 101.6 mm. Incluye puntas de 2.29, 2.74 y 3.05 mm de 15° y 2.29, 2.74 y 3.05 mm de 90°
- 927: Externos: 6.35 a 50.80 mm; Internos: 9.53 a 50.80 mm. Incluye puntas de 0.91, 1.19 y 1.78 mm rectas y 0.91 y 1.19 mm de 90°
- 926: Externos: 3.18 a 25.40 mm; Internos: 6.35 a 25.40 mm. Incluye puntas de 0.58, 0.91 y 1.19 mm rectas y 0.91 y 1.19 mm de 90°



PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
929	10.00	254.00	1.38	35.05	1.00	25.40	1.25	31.75	N/A	N/A	4.75	120.65	1.06	480.81
927	8.00	203.20	1.60	40.64	0.97	24.64	1.71	43.43	N/A	N/A	4.85	123.19	0.50	226.80
926	6.25	158.75	1.31	33.27	0.87	22.10	1.12	28.45	N/A	N/A	3.29	83.57	0.32	145.15

U.S. Patent No. 7,194,936 B2



Not an ISO Certified Product.

Ce produit n'est pas certifié par l'ISO.

Este producto no tiene certificación ISO.

Features

- Locknut plier
- Fits most popular UL locknut sizes: 1/2", 3/4", 1" (metal, PVC, plastic).
- Thin profile for confined spaces
- Pincas à contre-écrou
- Convient aux tailles d'écrou d'arrêt les plus communes : 12.7 mm, 19.05 mm, 25.4 mm (métal, PVC, plastique).
- Profil effilé pour espaces confinés
- Alicata para contratueracas
- Se ajusta a los tamaños más populares de contratueracas: 12.7 mm, 19.05 mm, 25.4 mm (metal, PVC, plástico).
- Perfil delgado para espacios estrechos

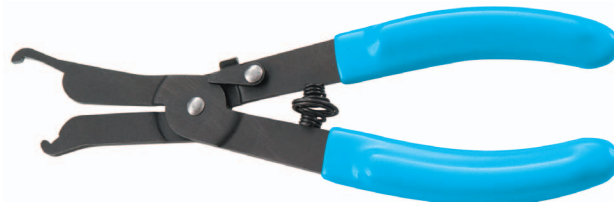


PLIER	A OVERALL LENGTH		B JAW LENGTH		C JOINT THICKNESS		D JOINT WIDTH		E CUTTING EDGE		H HANDLE SPAN		WEIGHT	
	in	mm	in	mm	in	mm	in	mm	in	mm	in	mm	pounds	grams
960	8.50	215.90	2.38	60.45	0.21	5.33	0.92	23.37	N/A	N/A	2.54	64.52	0.48	217.72

U.S. Patent No. 7,197,967

MERCHANDISERS / GIFT SETS

PROFITURN CENTER®

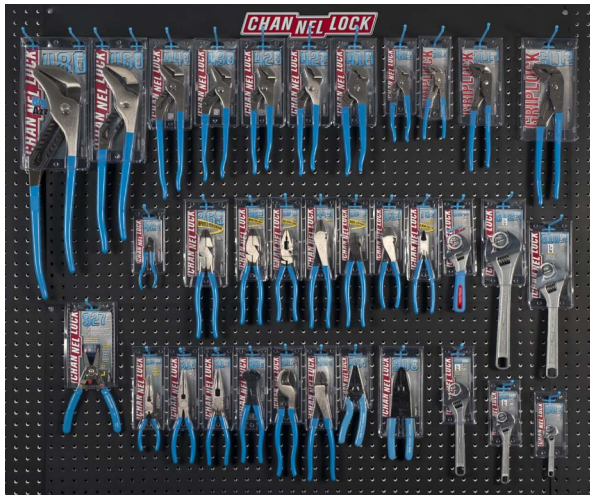

PTD-MRO

ITEM	QTY.	ITEM	QTY.
420®	2	318	2
430®	2	GL10	2
440®	2	GL12	2
460	2	GL6	2
426	2	804	2
337	2	806W	2
317	2	808W	2
E338	2	810W	2
422	2	812W	2
326	2	410	2
908	2	909	2
358	2	E326	2
957	2	E348	2
927	2	6WCB	2
758	2	449	2
369	2	480	2
368	2	424	2
911	2	TOTAL	70



PTD-ND1

ITEM	QTY.
N132CB	3
N120CB	3
N140CB	3
N316CB	3
N380CB	3
N516CB	3
N716CB	3
ND-7CB	3
TOTAL	24



PTD-9

ITEM	QTY.	ITEM	QTY.
480	1	909	2
460	2	908	2
440®	2	957	2
442	2	369	2
430®	2	368	2
420®	2	526	2
422	2	927	2
426	2	212	2
424	2	8WCB	2
410	2	812W	2
358	2	810W	2
357	2	808W	2
317	2	GS-3T	2
386	2	620L	2
337	2	615	2
436	2	61CB	2
911	2	TOTAL	65



PTD-CB1

ITEM	QTY.
430CB	3
369CB	3
318CB	3
338CB	3
420CB	3
911CB	3
909CB	3
358CB	3
TOTAL	24



PTD-CB2

ITEM	QTY.
430CB	3
369CB	3
318CB	3
338CB	3
TOTAL	12