

# PVC Switch Boxes


## Applications:

Eaton's Crouse-Hinds non-metallic switch and outlet boxes are used:

- In branch circuit wiring as a splice point
- To mount wiring devices such as switches and receptacles
- To provide mechanical protection for wiring systems and electrical devices

## Features:

- Available for use with wood or metal studs to meet any construction preference.
- Quick entry feature on all non-metallic boxes offers labor savings – no need to break out knockouts – simply push the non-metallic cable into the box. No tools are required. No need to remove knockouts.
- Unique configuration of this quick entry feature on single gang boxes provides a self-feeding feature that eliminates the need to reach inside the box to pull the wire out.
- Integral labor saving clamping feature on two, three and four gang boxes. The multiple gang box unique entry also serves as a clamp, eliminating the need to mechanically secure the cable inside the box. There are no separate clamps or screws to install or tighten. Each entry into the multiple gang boxes has the quick entry feature allowing the installer to simply push the cable into the box without the need for tools or removal of knockouts, so the cable can be inserted where it is required.

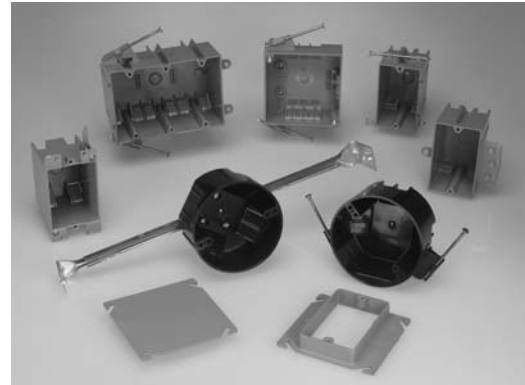

## Certifications and Compliances:

- UL Listed File No. E102328
- Classified for use in fire rated (2 HR) wall or ceiling. Fire Rating No. R9933.

## Standard Materials:

- PVC-Polyvinyl Chloride Compound

## SWITCH BOXES – ANGLED NAILS

### UL LISTED



TP1800



TP2000



TP2300

Cat. #	Bracket or Nails	Capacity Cu. In.	H	W	D	Unit Qty.	Wt. Lbs. Per 100
TP1800	Nails	18.0	3 <sup>3</sup> / <sub>4</sub> "	2 <sup>1</sup> / <sub>4</sub> "	2 <sup>3</sup> / <sub>4</sub> "	100	23
TP2000	Nails	20.3	3 <sup>3</sup> / <sub>4</sub> "	2 <sup>1</sup> / <sub>4</sub> "	3 <sup>3</sup> / <sub>16</sub> "	100	25
TP2300	Nails	23.0	3 <sup>3</sup> / <sub>4</sub> "	2 <sup>1</sup> / <sub>4</sub> "	3 <sup>7</sup> / <sub>16</sub> "	100	27

## SWITCH BOXES – INTEGRAL CLAMPS

### UL LISTED



TP1690  
(Old Work)



TP2030  
(For Wood or Metal Studs)

Cat. #	Bracket or Nails	Capacity Cu. In.	H	W	D	Unit Qty.	Wt. Lbs. Per 100
TP1690	Swing Clips & Integral Clamps	16.0	3 <sup>5</sup> / <sub>8</sub> "	2 <sup>5</sup> / <sub>16</sub> "	2 <sup>3</sup> / <sub>4</sub> "	50	20
TP2030	Face Bracket (1/2" offset)	20.3	3 <sup>1</sup> / <sub>16</sub> "	2 <sup>1</sup> / <sub>4</sub> "	3 <sup>3</sup> / <sub>16</sub> "	100	24

## Crouse-Hinds

by **EATON**

CP

# PVC Switch Boxes

CP

## 3" DEEP SWITCH BOXES – TWO GANG

UL LISTED



**TP3490**  
(Old Work)



**TP3600**



**TP3635**

Cat. #	Bracket or Nails	Capacity Cu. In.	H	W	D	Unit Qty.	Wt. Lbs. Per 100
TP3490	Swing Clips	25.0	3 <sup>9</sup> / <sub>16</sub> "	4"	3 <sup>7</sup> / <sub>16</sub> "	50	29
TP3600	Nails	32.0	3 <sup>3</sup> / <sub>4</sub> "	4"	3"	25	37
TP3635*	Brackets & Nails	48.0	3 <sup>3</sup> / <sub>4</sub> "	4"	3"	50	42

\*Face Bracket on PVC Boxes are offset 1/2" unless stated otherwise

## 2<sup>11</sup>/<sub>16</sub>" DEEP SWITCH BOXES – THREE GANG

UL LISTED



**TP4600**



**TP4635**

Cat. #	Bracket or Nails	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
TP4600	Nails	44.0	50	45
TP4635*	Brackets & Nails	74.0	25	50

\*Face Bracket on PVC Boxes are offset 1/2" unless stated otherwise

## 2<sup>11</sup>/<sub>16</sub>" DEEP SWITCH BOXES – FOUR GANG

UL LISTED



**TP6180**

Cat. #	Bracket or Nails	Capacity Cu. In.	Unit Qty.	Wt. Lbs. Per 100
TP6180†	Nails & Bar Support	55.0	25	85

\*Face Bracket on PVC Boxes are offset 1/2" unless otherwise stated

†Not 2-Hour Fire Rated