Catalog Number	
Notes	Type

Indoor Decorative

Litepuff

Linear Flush Mounting

URBAN COLLECTION
Linear T8 Fluorescent

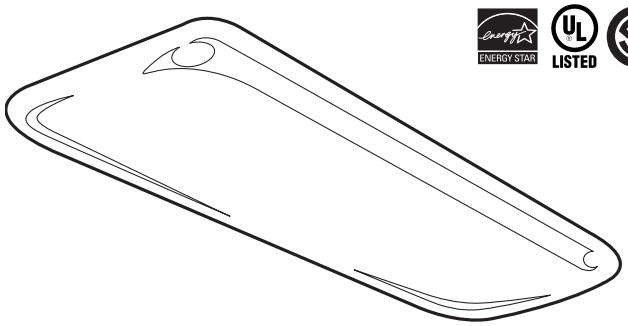

FEATURES & SPECIFICATIONS

INTENDED USE
Provides general illumination in residential and light commercial applications. Ideal for use in offices and all rooms in the house.

ATTRIBUTES
Decorative contoured distinctive linear design complements a variety of decors. Durable, milk white acrylic diffuser provides wide spread, uniform illumination and allows easy access for cleaning and maintenance. Available in four sizes: 1'x4', 1-1/2'x2', 2'x2', or 1-1/2'x4.

Utilizes (2) linear T8 fluorescent lamps for energy efficiency, superior color rendering and long life (not included).

Standard with electronic ballast (120 volt, 60 Hz) ensures no flickering and quiet operation without interfering with other electronics. Also available in other ballast configurations.

For use with non-dimmable switches only.

LISTING
UL listed (standard) and CSA certified suitable for damp locations and ENERGY STAR® qualified. For non-RE ballast fixtures, UL (standard) and for CSA certified (see options).

WARRANTY
Guaranteed for two years against mechanical defects in manufacture.

DIMENSIONS

Nominal Size	Lamp Configuration	Model Number	Number of Lamps	(A) Width inches (cm)	(B) Length inches (cm)	(C) Extension* inches (cm)
1' x4'		10640	(2) 32W Linear T8	11-1/4" (28.6)	51-1/2" (130.8)	5-1/2" (14.0)
1-1/2' x 2'		10641	(4) 17W Linear T8	16-5/8" (42.2)	27-1/2" (69.5)	5-1/2" (14.0)
2' x 2'		10651	(2) 31W Linear T8 *U31 or U316*	27" (68.6)	27-3/8" (69.5)	5-1/2" (14.0)
1-1/2' x 4'		10642	(4) 32W Linear T8	16-5/8" (42.2)	51-1/2" (130.8)	5-1/2" (14.0)

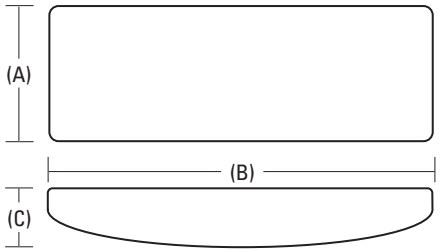

* Extension from ceiling

All dimensions are in inches (centimeters)

ORDERING INFORMATION

Example: **10640 32 GEB**

Choose the boldface catalog nomenclature that best suits your needs and write it on the appropriate line. Order accessories as separate catalog numbers.

Model Number[1,2]

10641 1-1/2'x2' - (4) 17W Linear T8 fluorescent lamps
10640 1'x4' - (2) 32W Linear T8 fluorescent lamps
10651 2'x2' - (2) 31W linear T8 fluorescent lamps[3]
10642 1-1/2'x4' - (4) 32W Linear T8 fluorescent lamps

Residential Ballast[4]

RE 120 volt residential electronic ballast (standard)
(blank) Other voltage and ballast types available (see ballast/voltage)

Lamp[5]

(blank) RE ballast fixtures only

Non-RE ballast fixtures only
17 17W T8 (2' fixtures only)
U31 31W T8 (1-5/8" leg)[6]
U316 31W T8 (6" leg)[6]
32 32W T8 (4' fixtures only)

Ballast/Voltage[7]

(blank) RE ballast fixtures only
MVOLT Multi-volt
120 120 volt
277 277 volt
347 347 volt

Others available: consult factory

Options

GEB Electronic ballast, <20%THD
GEB10IS T8 electronic ballast, <10% THD, instant start
GEB10RS T8 electronic ballast, 10% THD, rapid start
CSA CSA Certified[8]

Consult factory for other options and accessories

Accessories/Replacement parts

DPUFF 1' x 2' white acrylic diffuser
D15PUFF2 1-1/2' x 2' white acrylic diffuser
D2PUFF2 2' x 2' white acrylic diffuser
D15PUFF 1-1/2' x 4' white acrylic diffuser

Notes:
1. **Lamps not included.**
2. Use with non-dimmable switches only.
3. Lamp configuration for **RE** fixtures is standard **U316.**
4. Residential electronic ballast standard and requires **RE** designation.
5. No designation for lamp type is required on **RE** ballast fixtures.
6. Only available with 2'x2' fixtures (Also can be ordered on **RE** ballast 2x2 fixtures).
7. No designation for ballast/voltage type is required on **RE** ballast fixtures.
8. CSA standard on **RE** ballast fixtures.