

Wet Location Industrial

DMW




FEATURES

- For harsh environments where dust, dirt, humidity or moisture is present
- Suitable for surface or suspended mounting, unit or row installation; horizontal wall mount only
- Impact-resistant, reinforced polyester fiberglass housing
- Features shatter-resistant 50% DR acrylic diffuser as standard
- Poured-in gasketing provides a continuous seal between housing and diffuser
- Captive, corrosion-resistant, cam-action latches secure the diffuser; 2 stainless steel mounting brackets included
- UL Listed for wet location, NSF Listed and IP65 rated

ORDERING INFORMATION

Catalog Number	UPC	Description	# of Lamps	Wattage	Voltage	Lamp Included	Pallet Qty.	Standard Carton Qty.
DMW 2 32 MVOLT GEB10IS	784231151099	Enclosed Industrial	2	32	120-277	N	41	1
DMW 2 48T8HO MVOLT GEB10PS	745977218644	Enclosed Industrial	2	48	120-277	N	41	1
DMW 2 54T5HO MVOLT GEB10PS90	745975221059	Enclosed Industrial	2	54	120-277	N	41	1
DMW 2 96T8 MVOLT GEB10IS	784231003930	Enclosed Industrial	2	59	120-277	N	28	1
DMW 2 96HO 120 ES CW20	784231016510	Enclosed Industrial	2	110	120	N	28	1
DMW 2 96T8HO MVOLT GEB10PS	745974494409	Enclosed Industrial	2	86	120-277	N	28	1
TDMW 2 32 MVOLT 1/4 GEB10IS	784231003916	Tandem, Enclosed Industrial	4	32	120-277	N	28	1

DIMENSIONS

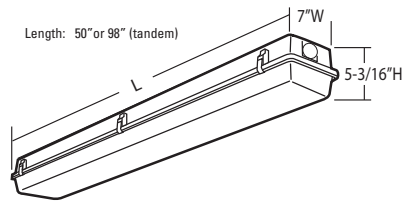

ACCESSORIES

- **DDM48** 4' Enclosed Fixture Replacement Lens (Unit Packed)
- **DDM96** 8' Enclosed Fixture Replacement Lens (Unit Packed)
- **DDM48 J5** 4' Enclosed Fixture Replacement Lens (Job Packed with Qty 5)
- **DDM96 J5** 8' Enclosed Fixture Replacement Lens (Job Packed with Qty 5)
- **DMW/EGW Latch J6** 4' Enclosed Fixture Replacement Latch (Job Packed with Qty 6)
- **DMW/EGW Latch J10** 8' Enclosed Fixture Replacement Latch (Job Packed with Qty 10)

Certain airborne contaminants can diminish integrity of acrylic. See pg.156 for Acrylic Compatibility table for suitable uses.

LED High Bays

IBL



FEATURES


- Ideal replacement for 400W MH, 6-lamp T5HO or 8-lamp T8
- Mounting heights ranging from 15-40'
- Die-formed aluminum alloy chassis with integrated fins for superior cooling
- Reflectors feature precision-formed optics utilizing reflective Alanod® MIRO-5 specular-aluminum
- Listed for ambient environments up to 131°F (55°C)

ORDERING INFORMATION

Catalog Number	UPC	Description	Lumens*	Color Temperature*	Voltage	Distribution	Pallet Qty.	Standard Carton Qty.
IBL 18L WD LP740 DLC	753573372264	LED High Bay	18,000	4000K	120-277	Wide	36	1
IBL 24L WD LP740 DLC	753573361398	LED High Bay	24,000	4000K	120-277	Wide	36	1

* Numbers listed are nominal.

DIMENSIONS

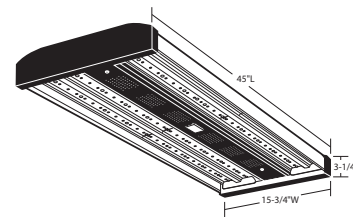

ACCESSORIES

- **WGIBL** Wireguard