

DIALIGHT INDUSTRIAL LED LIGHTING

For Oil & Gas





AMERICAS

Dialight

WHY LIGHTING MATTERS in Oil and Gas Applications

Lighting is of critical importance in Oil and Gas applications to maximize both safety and productivity. These sites are among the most dangerous to work due to extremely harsh conditions and explosive environments. It is without question that the lighting must be able to withstand ignitable atmospheres and prevent explosions, while also providing clear illumination for workers to perform tasks safely.

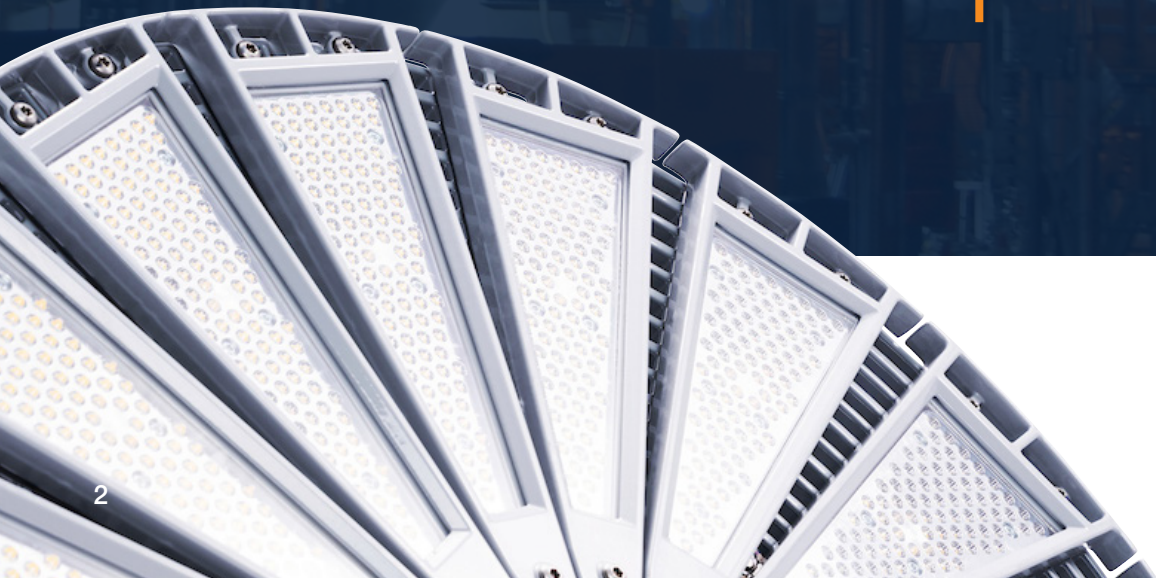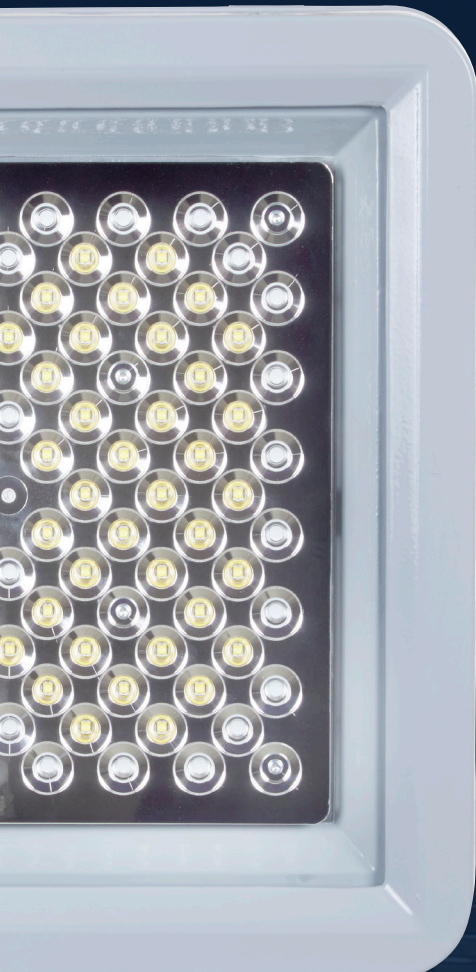

Noisy, complex heavy machinery



High heat and high vibration



Chemical vapors, dust and debris



Physical hazards, such as slips, falls, and moving objects




Arc Flash




Flammable and explosive environments

THE COST OF POOR LIGHTING in Oil and Gas Applications

Poor illumination can contribute to tragic work site accidents and injuries in the Oil and Gas sector. Between 2009-2018 the US Bureau of Labor statistics cited:

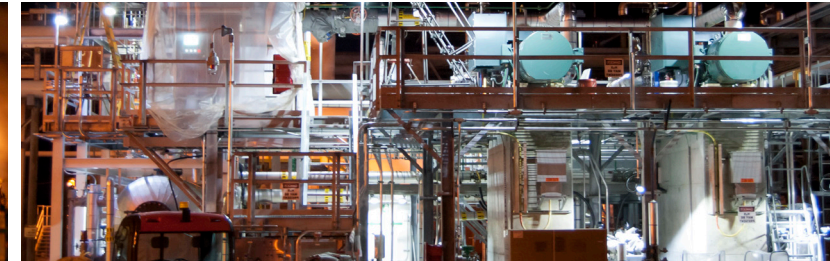


While significant strides have been made by organizations such as OSHA over the past few decades to improve safety, the Oil and Gas industries inherently involve risks and hazards that demand high quality lighting. When choosing a lighting partner for your facilities, care must be taken to ensure their products have proven to perform safely and reliably in your environments and offer a sustainable solution.

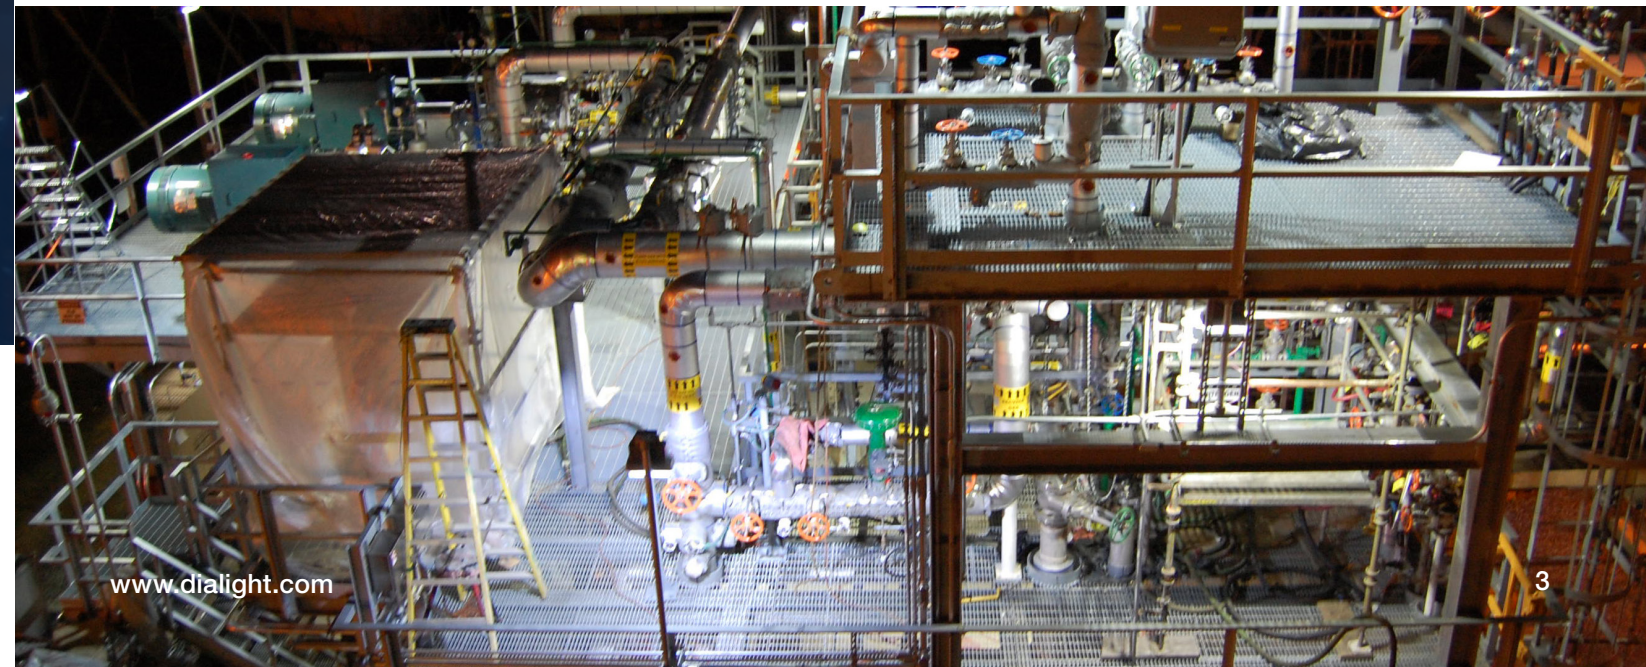

DIALIGHT SOLUTIONS for Oil and Gas Applications

Dialight is the world leader in industrial LED lighting technology with millions of fixtures installed worldwide. We specialize in lighting products designed for the world's harshest industrial environments – enabling industrial customers to reduce their energy costs, maintenance costs, and carbon footprint while maximizing the safety and productivity of their employees and facility. From our signature High Bay line to our versatile Linear fixtures, Dialight offers a large selection of rugged products ideally suited for environments and applications found within the Oil and Gas Industry.

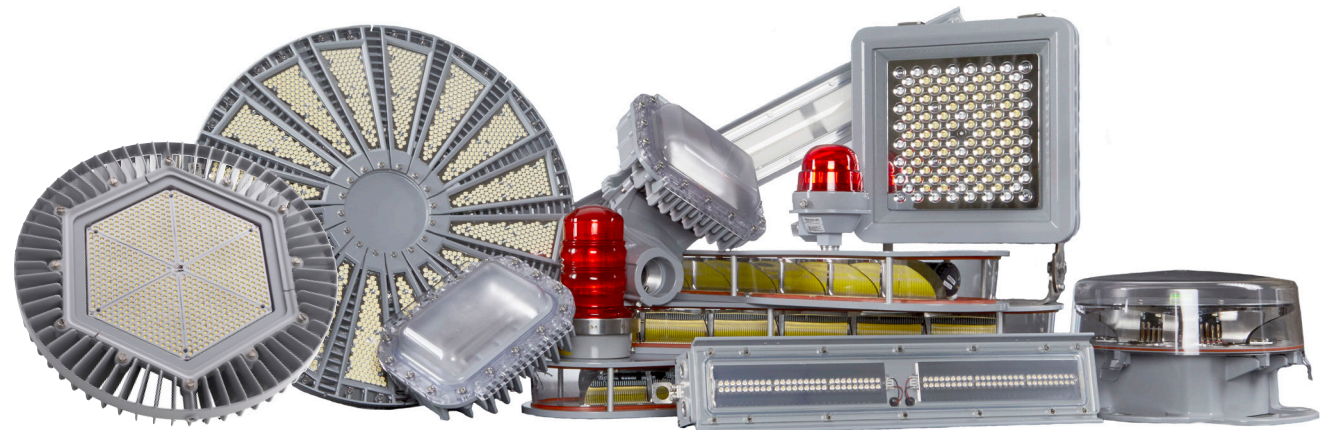

WHERE TO USE DIALIGHT PRODUCTS in Oil and Gas Applications

UPSTREAM

- DERRICKS
- MUD TANKS
- DRILLING FLOOR
- GENERATORS, PUMPS
- CONTROL HOUSE
- OPERATOR'S HOUSE
- OPEN AREAS
- PERIMETER/SECURITY AREAS

MIDSTREAM & DOWNSTREAM

- STORAGE TANKS, STAIRS/LADDERS
- SWITCHGEAR, SWITCHRACKS
- PERIMETER, SECURITY AREAS
- LOADING RACKS, DOCKS
- PUMPS, MOTORS, MANIFOLDS, VALVES
- PLATFORMS, CATWALKS
- COOLING TOWERS
- FACILITY ROADWAYS

See product portfolio pages for more detailed product and ordering information



TECHNOLOGY DIFFERENTIATION

When choosing an LED Lighting partner, consider how their products are engineered, constructed and tested prior to making your decision. Most Dialight products are engineered to a **10 year warranty** and were designed with harsh environments, such as Oil and Gas applications, in mind.

CUSTOM POWER SUPPLIES

Long-life potted drivers with optimized thermal dissipation for protection against environmental contaminants and vibration related failures.

LOW MAINTENANCE MECHANICAL DESIGN


Sealed and optimized to reduce or eliminate the need for maintenance over the life of the fixture. Easy to install and retrofit to existing infrastructure.

LATEST LEDS AND ADVANCED OPTICS

Highly efficient, crisp, low-glare illumination. Lighting where you need it, not where you don't.

INTELLIGENT CONTROLS

Flexibility to group, dim and schedule lights around the unique needs of a facility to maximize energy savings. Plus, seamless integration with existing factory automation.

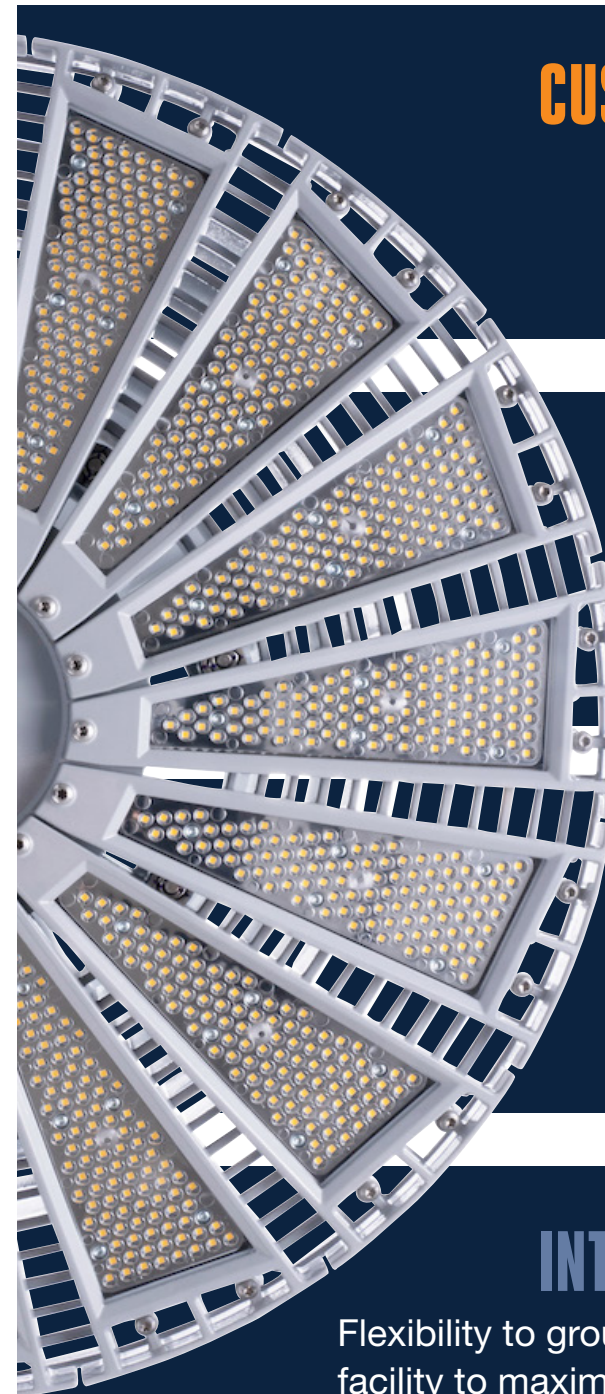

APPLICATION GUIDE for Oil and Gas Sites

Upstream



1 SafeSite® High Bay
Hazardous location oil, gas and chemical storage and processing



6 SafeSite® and Vigilant® Area Lights
For hazardous and non-hazardous lower ceiling indoor or outdoor process and stanchion mount applications*



2 SafeSite® and Vigilant® Low Bays
For hazardous and non-hazardous lower ceiling indoor or outdoor applications where wider light distribution is critical



3 SafeSite® and DuroSite® Flood Lights
For hazardous and non-hazardous indoor or outdoor flood lighting applications; multiple beam patterns available



4 SafeSite® and Vigilant® LP/TC Linear
For hazardous and non-hazardous indoor or outdoor fluorescent strip/vaportite replacements, task or inspection lighting, electrical rooms, shops, and process areas. 4ft and 2ft versions available



5 Vigilant® High Output High Bay
For high ceiling high bay applications typically 40 feet or above



Midstream



7 Vigilant® Dual Floodlight
For indoor or outdoor high power flood applications (Typical 1,000 watt or better HID replacement)



8 Vigilant® High Bay
For non-hazardous indoor or outdoor high bay applications over 14 feet. Remote power supply option available.



9 StreetSense® Street Light
For plant maintained roadways and general outdoor illumination



Downstream




CASE STUDY Valero Refinery San Diego, California

Ever-escalating environmental standards mean that the world's most demanding industrial locations are facing a new set of requirements. Not only do they need smart new lighting ideas and innovative approaches to enhancing safety, they also need lighting that reduces CO₂ emissions, improves energy efficiency and cuts the total cost of ownership. Valero, the largest refiner in North America, partnered with Dialight to implement a new, energy efficient, safe and environmentally friendly lighting approach.

Valero's first priority was safety and improved lighting. As a result, SafeSite provides better visual acuity, reduces eye strain and enables Valero to create an even safer work environment for employees relying heavily on visual judgment in tasks like maneuvering, reading placards or identifying color coded wiring. The new lighting eliminates any need for portable lights to get the job done safely by improving access to the Valero plant equipment as well as improving worker safety with less chance of accidental slips and trips. Light pollution is greatly reduced with SafeSite lighting fixtures which utilize the latest LED technology with proprietary optics designed to focus light directionally so that they illuminate only the required area within the Valero refinery, such as straight walkways, avoiding adjacent and upward light spill. Unlike conventional lights, LEDs achieve 100% light output from the second they are switched on and are rated down to -40°C and still provide 100% of the rated lumen output.

- Fewer lighting fixtures needed
- Shorter installation time
- Reduced energy consumption and CO₂ emissions
- Zero maintenance
- Improved safety from better quality of light
- Minimized light spill
- Cold start capable
- Instant on ability
- Lower cost of ownership

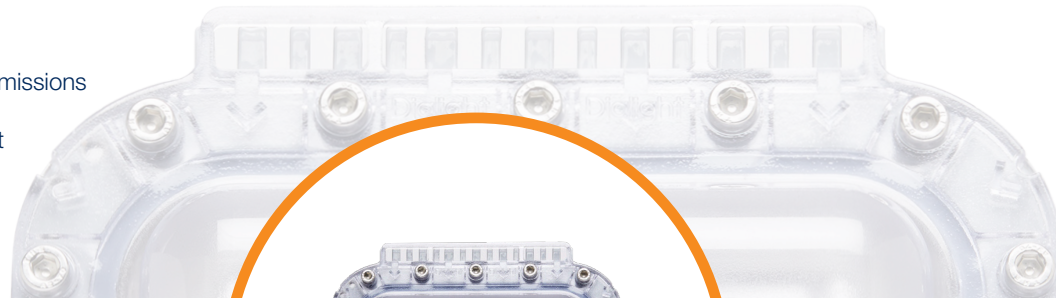

CASE STUDIES Rubis Terminal Rotterdam, The Netherlands

Rubis Group is the fifth largest independent operator in Europe of downstream petroleum and chemical facilities. With a new Rotterdam location, designers were looking for a better solution, aiming to light the new facility with the latest-generation LED fixtures to provide the most energy efficient, safe and reliable illumination. Because of its harbor location, reducing light pollution for the benefit and well-being of both humans and wildlife was also a priority, making Dark Sky-compliant lighting a must. By opting for Dialight's next-generation LED fixtures, Rubis reduced energy lighting consumption, along with the greenhouse gases produced as a result, at the new facility by 60 percent compared to conventional lighting. Based on maintenance expenditures at other similar facilities, the company also saved around 100,000 euros per year on maintenance, for lights that were guaranteed to last, multiplying the annual savings accordingly.


- Installed over 270 ATEX certified and non-certified fixtures
- Sought alternative to failure-prone fluorescent fixtures
- 100,000 euros annual maintenance savings
- Reduced energy consumption 60 percent
- Zero-emissions facility



For more case study information please visit www.dialight.com.

PRODUCT PORTFOLIO High Bays

PRODUCT PORTFOLIO High Bays



VIGILANT® HIGH BAY

For use in non-hazardous indoor and outdoor high bay and occasionally flood lighting applications. Replaces up to 1,000 watt traditional HID fixtures.

Ideally suited for:

STORAGE/WAREHOUSE

MAINTENANCE SHOPS



SAFESITE® HIGH BAY


For use in hazardous classified high bay applications where oil, gas and chemical vapors are present. See technical spec sheet for applicable certifications.

Ideally suited for:

PROCESS AREAS

OIL AND GAS STORAGE

LOADING/UNLOADING



RELIANT™ HIGH BAY

For use in indoor non-hazardous applications to replace either HID or Fluorescent fixtures up to 1,000 watts where harsh environment protection is less of a concern.

Ideally suited for:

STORAGE/WAREHOUSE

MAINTENANCE SHOPS



VIGILANT® HIGH OUTPUT HIGH BAY

For use in high output or high ceiling non-hazardous indoor and outdoor high bay applications. Replaces up to 1,500 watt traditional HID fixtures with mounting heights up to 100'.

Ideally suited for:

STORAGE/WAREHOUSE

VERY HIGH MOUNTING HEIGHTS



VIGILANT® LOW BAY

For use in indoor and outdoor lower mounting height high bay applications where wider light distribution is required. Replaces up to 250+ watt traditional HID fixtures.

Ideally suited for:

WAREHOUSES

MCC/ELECTRICAL ROOMS

MAINTENANCE SHOPS



SAFESITE® LOW BAY

For use in lower mounting height hazardous applications where oil, gas and chemical vapors are present. See technical spec sheet for applicable certifications.

Ideally suited for:

PROCESS AREAS

OIL AND GAS STORAGE

LOADING/UNLOADING

Part Number	Certification	Fixture Lumens	Wattage	lm/W	CCT	Lens	Beam Distribution
Vigilant® High Bay*							
HEU7MC2ANNWNGN	UL 1598/A, CSA	11,250	80	141	5000K (cool white)	Glass - Clear	Medium
HEU7MC2BNNWNGN	UL 1598/A, CSA	14,250	102	140	5000K (cool white)	Glass - Clear	Medium
HEU7MC2CNNWNGN	UL 1598/A, CSA	19,500	129	151	5000K (cool white)	Glass - Clear	Medium
HEU7MC2ENNWNGN	UL 1598/A, CSA	26,250	186	141	5000K (cool white)	Glass - Clear	Medium
SafeSite® High Bay*							
HED7MC2ANNWNGN	UL 844 (CID2)	11,250	80	141	5000K (cool white)	Glass - Clear	Medium
HED7MC2BNNWNGN	UL 844 (CID2)	14,250	102	140	5000K (cool white)	Glass - Clear	Medium
HED7MC2CNNWNGN	UL 844 (CID2)	19,500	129	151	5000K (cool white)	Glass - Clear	Medium
HED7MC2ENNWNGN	UL 844 (CID2)	26,250	186	141	5000K (cool white)	Glass - Clear	Medium
HEC7MC2ENNWNGN	UL 844 (CID1)	23,500	186	126	5000K (cool white)	Clear Tempered Glass	Medium
Reliant™ High Bay*							
RHU5MC2FDCNNGN	UL 1598, CSA	26,400	199	133	5000K (cool white)	Diffused Polycarbonate	Medium
RHU5MC2HDCNNGN	UL 1598, CSA	31,500	239	132	5000K (cool white)	Diffused Polycarbonate	Medium
Vigilant® Low Bay							
LEULUC29NNWNGN	UL 1598/A, CSA	9,000	80	113	5000K (cool white)	Polycarbonate Dome - Diffused	Ultra Wide
SafeSite® Low Bay							
LEDLUC29NNWNGN	UL 844 (CID2)	9,000	80	113	5000K (cool white)	Polycarbonate Dome - Diffused	Ultra Wide

*Polycarbonate lens options available. Consult product spec sheet for more information.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

PRODUCT PORTFOLIO Area Lights



VIGILANT® AREA LIGHT

This extremely versatile fixture series can be used in non-hazardous indoor and outdoor applications. Designed for ease of installation, this product line features quick install retrofit kits that support legacy HID fixtures from GE, Crouse, Appleton, Killark and others. See technical spec sheet for more information and additional accessories.

Ideally suited for:

- CATWALKS, PLATFORMS
- STORAGE AREAS, DOCKS
- LOADING/UNLOADING
- DRILLING FLOORS



SAFESITE® AREA LIGHT

For use in hazardous classified applications where oil, gas and chemical vapors are present. Designed for ease of installation, this product line features quick install retrofit kits that support many legacy HID fixture brands. See technical spec sheet for hazardous certifications and more information on additional accessories.

Ideally suited for:

- PROCESS AREAS
- CATWALKS, PLATFORMS
- COOLING TOWERS, TASK LIGHTING
- LOADING/UNLOADING
- HAZARDOUS STORAGE

Part Number	Certification	Fixture Lumens	Wattage	lm/W	CCT	Lens	Beam Distribution	Mounting
Vigilant® Area Light								
ALU5AC26NSNNGN	UL 1598/A, CSA, NOM	5,100	40	128	5000K (cool white)	Diffused Polycarbonate	180°	45° Stanchion
ALU5AC27NWNNGN	UL 1598/A, CSA, NOM	6,600	52	127	5000K (cool white)	Diffused Polycarbonate	180°	45° Wall
ALU7BC29NNWNGN	UL 1598/A, CSA, NOM	9,000	66	136	5000K (cool white)	Clear Tempered Glass	360°	3/4" NPT
SafeSite® Area Light								
ALF5AC26NSNNGN	UL 844 (CID2, CII, CIII)	5,300	40	133	5000K (cool white)	Diffused Polycarbonate	180°	45° Stanchion
ALC7BC26NNWNGN	UL 844 (CID1)	5,400	40	135	5000K (cool white)	Clear Tempered Glass	360°	3/4" NPT
ALD7BC27NVNNGN	UL 844 (CID2, CIII)	7,300	52	140	5000K (cool white)	Clear Tempered Glass	360°	0° Wall
ALD7AC27NSNNGN	UL 844 (CID2, CIII)	7,300	52	140	5000K (cool white)	Clear Tempered Glass	180°	45° Stanchion
Accessories								
HZXW3	316 stainless steel adjustable mounting bracket							

For more details on product specifications including mounting information, please visit www.dialight.com.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.


PRODUCT PORTFOLIO Area Light Accessories

With a wide variety of brackets and retrofit kits available, Dialight's versatile Area Light can easily meet the needs of virtually any industrial application, while saving time and money on installation.



AREA LIGHT RETROFIT KITS


Dialight's Area Light series is available with quick install retrofit kits to the following products: Eaton's Crouse-Hinds – Champ®, GE Lighting Solutions – Filtr-Gard™, Holophane Petrolux® II, III, Thomas & Betts Hazlux®, Appleton® Mercmaster III, Appleton® Mercmaster II, and Killark® Certilite® & Certilite® V



AREA LIGHT MOUNTING ACCESSORIES

The Area Light has always been extremely versatile and now with our new Universal Mounting Adapter (HZXUMA), it provides even greater flexibility by allowing you to modify stock you have on-hand to configure based on your needs. All available in Class I, Div. 2, Class II, and Class III certified options.

Eaton's Crouse-Hinds – Champ® Retrofit Kit - HZXTHCH					Killark® Certilite® & Certilite® V Retrofit Kit - HZXTHKL				Thomas & Betts Hazlux® Retrofit Kit - HZXHTTB				
Pendant	Ceiling	Wall	Stanchion	Quad Mount	Pendant	Ceiling	Wall	Stanchion	Pendant	Pendant Cone	Flexible Pendant	Ceiling	Wall
APM2	CM2	TWM2	JM5	QM25	VMA2B & VMA-2	VMX2B & VMX-2	VMB2B & VMB-2	VMD4B	3P	3F	3C	3W	5S
APM3	CM3	TWM3	PM5		VMA3B & VMA-3	VMX3B & VMX-3	VMB3B & VMB-3	VMD5B	4P	4F		4W	6S
HPM2					VMC2B & VMC-2	VMX6B, 7B, 8B, 9B		VMS5B					5J, 6J
Holophane® Petrolux II, III Retrofit Kit - HZXTHP3					Appleton® Mercmaster III Retrofit Kit - HZXTHAP				GE Lighting Solutions – Filtr-Gard™ Retrofit Kit - HZXTHGE				
Pendant	Universal	Stanchion	Ceiling	Wall	Pendant	Ceiling	Wall	Stanchion	Wall	25° Angle Stanchion	25° Angle Stanchion	Straight Stanchion	Straight Stanchion
PD	UN	SA	CD	WL	KPA- 75, 100	KPC-75	KPWB-75	KPS-125	VB2-VIB	VS4	VS4-VIB	VL4	VL4-VIB
GH		ST	CE	W	KPAF-75, 100	KPC-100	KPWB-100	KPS-150	VB3-VIB	VS5	VS5-VIB	VL5	VL5-VIB
P		A	B, C, D		KPCH-75, 100			KPST-125	GE Lighting Solutions – Filtr-Gard™ Retrofit Kit - HZXTHGE				
Appleton® Mercmaster II Retrofit Kit - HZXTHM2					GE Lighting Solutions – Filtr-Gard™ Retrofit Kit - HZXTHGE				GE Lighting Solutions – Filtr-Gard™ Retrofit Kit - HZXTHGE				
Pendant	Ceiling	Wall	Stanchion	Pendant	Ceiling	Wall	Stanchion	Quad Mount					
LPA-75	LPC-75	LPWB-75	LPS-125	3P	3F	3C	3W	5S					
LPA-100	LPC-100	LPWB-100	LPS-150	4P	4F		4W	6S					
								5J, 6J					




UMA Area Light
ALx-xxxx-xxUx-xxN



Stanchion 45°
HZXS45



Wall 45°
HZXW45



Wall 0°
HZXW01



Conveyor
HZXCV34



Ceiling
HZXFM

For more details on product specifications including mounting information, please visit www.dialight.com.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

PRODUCT PORTFOLIO Floodlights

PRODUCT PORTFOLIO Linear Lights



**VIGILANT®
DUAL FLOODLIGHT**

Round high lumen dual floodlight to replace up to 1500 watt HID units in nonhazardous areas. See technical spec sheet for more information on additional accessories, optical patterns, and hazardous certified options.

Ideally suited for:

GENERAL FLOOD LIGHTING

LOADING/UNLOADING AREAS



**SAFESITE®
10/15K FLOODLIGHT**

Traditional square flood light designed to replace 250 watt and 400 watt HID units in hazardous areas. See technical spec sheet for information on additional accessories and optical patterns.

Ideally suited for:

LOADING/UNLOADING

OIL AND GAS STORAGE



**STREETSENSE®
STREET LIGHT**

For use in plant maintained roadways, parking areas and general outdoor illumination.


Ideally suited for:

ROADWAYS/PARKING AREAS

Part Number	Certification	Fixture Lumens	Wattage	lm/W	CCT	Lens	Beam Distribution
Vigilant® Dual Floodlight							
FDU76C2MDSNNGN	UL 1598/A	56,000	385	145	5000K (cool white)	Clear Tempered Glass	NEMA 6
FDU76CAMDSNNGN	UL 1598/A	56,000	457	122	5000K (cool white)	Clear Tempered Glass	NEMA 6
DuroSite® Floodlight							
FLW266NC2NG	UL 1598/A	11,250	106	106	5000K (cool white)	Clear Tempered Glass	NEMA 6
FLW455NC4NG	UL 1598/A	14,500	140	104	5000K (cool white)	Clear Tempered Glass	NEMA 5
SafeSite® Floodlight							
FLD266NC2NG	UL 844 (CID2)	11,250	109	103	5000K (cool white)	Clear Tempered Glass	NEMA 6
FLD466NC4NG	UL 844 (CID2)	15,000	130	115	5000K (cool white)	Clear Tempered Glass	NEMA 6
StreetSense® Street Light							
SL3C5CLGG	UL 1598, CSA	6,400	62	103	5000K (cool white)	Clear Tempered Glass	Type III
SL3C7ILGG	UL 1598, CSA	15,700	154	102	5000K (cool white)	Clear Tempered Glass	Type III

For more details on product specifications, please visit www.dialight.com.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.



VIGILANT® LP/TC LINEAR


Now featuring Dialight's exclusive 10 year warranty. Available in 2ft and 4ft varieties. For use in indoor and outdoor non-hazardous linear and low mounting height applications.

Ideally suited for:

MCC/ELECTRICAL ROOMS

WALKWAYS

SHOP AREAS



SAFESITE® LP/TC LINEAR

Now featuring Dialight's exclusive 10 year warranty. Available in 2ft and 4ft varieties. For use in indoor and outdoor hazardous certified linear and low mounting height applications where explosive gases may be present. CID1 linear available in a different series. Refer to Dialight website for more information.

Ideally suited for:

PIPE RACKS

PROCESS AREAS

DRILLING FLOOR

Part Number	Certification	Fixture Lumens	Wattage	lm/W	CCT	Lens	Beam Distribution
Vigilant® Low Profile Linear							
LKU4MC27DNNNGN	UL 1598/A	7,250	52	139	5000K (cool white)	Clear Polycarbonate	Medium
LJU4MC25DNNNGN	UL 1598/A	4,750	37	128	5000K (cool white)	Clear Polycarbonate	Medium
LKU4MC29DNNNGN	UL 1598/A	9,600	70	137	5000K (cool white)	Clear Polycarbonate	Medium
SafeSite® Low Profile Linear							
LKD4MC29DNNNGN	UL 844 (CID2, CID2, CIII)	9,600	70	137	5000K (cool white)	Clear Polycarbonate	Medium
LKD4MC27DNNNGN	UL 844 (CID2, CID2, CIII)	7,250	52	139	5000K (cool white)	Clear Polycarbonate	Medium
LJD4MC25DNNNGN	UL 844 (CID2, CID2, CIII)	4,750	37	128	5000K (cool white)	Clear Polycarbonate	Medium
LSC3C4M3GEX	UL 844 (CID1)	7,250	78	93	5000K (cool white)	Clear Tempered Glass	Medium
LSD3C4MEP*	UL 844 (CID2)	7,000	85	82	5000K (cool white)	Clear Polycarbonate	Medium

*Battery backup unit

For more details on product specifications, please visit www.dialight.com.

WARNING - INSTALLATION & SECONDARY RETENTION. Use of any Dialight products without proper installation (including secondary retention / netting) and periodic inspections could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) where applicable. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting where appropriate) and in compliance with all applicable laws and regulations. To the extent permissible under applicable laws, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products.

HAZARDOUS LOCATIONS RATINGS

Fixed and portable fixtures for installation and use in hazardous (classified) locations Class I, Divisions 1 and 2, Groups A, B, C, and D; Class II, Division 1, Groups E, F, and G; Class II, Division 2, Groups F and G; and Class III, Divisions 1 and 2, in accordance with the National Electrical Code, NFPA 70

Classes

The classes define the general nature of hazardous material in the surrounding atmosphere.

Class	Hazardous Material in Surrounding Atmosphere
Class I	Hazardous due to the presence of flammable gases or vapors in the air in quantities to produce explosive or ignitable mixtures
Class II	Hazardous due to the presence of combustible and/or conductive dusts
Class III	Hazardous due to the presence of easily ignitable fibers and flyings, such as wood chips, cotton, flax and nylon. Group classifications are not applied to this class

Divisions

The division defines the likelihood of hazardous substances being present in ignitable concentrations in the surrounding atmosphere.

Division	Presence of Hazardous Material
Division 1	The hazard exists during normal operating conditions
Division 2	The hazard is present only due to accidental system breakdowns or abnormal operations

Groups

The group(s) are determined by the specific hazardous materials which may be present.

Group	Hazardous Material in Surrounding Atmosphere
Class I Groups	
Group A	Acetylene
Group B	Hydrogen, fuel and combustible process gases containing more than 30% hydrogen by volume or gases of equivalent hazard such as butadiene, ethylene oxide, propylene oxide and acrolein
Group C	Carbon monoxide, methyl ether, hydrogen sulfide, methylacetylene, cyclopropane, ethyl and ethylene or gases of equivalent hazard
Group D	Gasoline, acetone, ammonia, benzene, butane, cyclopropane, ethanol, hexane, methanol, methane, vinyl chloride, natural gas, naphtha, propane or gases of equivalent hazard
Class II Groups	
Group E	Combustible metal dusts, including aluminum, magnesium and their commercial alloys or other combustible dusts whose particle size, abrasiveness and conductivity present similar hazards in connection with electrical equipment
Group F	Carbonaceous dusts that have more than 8 percent total entrapped volatiles or that have been sensitized by other materials so that they present an explosion hazard. Coal, carbon black, charcoal, and coke dusts are examples of carbonaceous dusts
Group G	Flour dust, grain dust, flour, starch, sugar, wood, plastic and chemicals

Reference
2020 NEC Code

North American HQ

1501 Route 34 South
Farmingdale, NJ 07727
Tel: 732-919-3119
Fax: 732-751-5778
info@dialight.com

WARNING / DISCLAIMERS:

Installation & secondary retention. The use of this product without proper installation (including secondary retention / netting) and periodic inspections, could cause severe injury or death. Dialight recommends that all installations should use secondary retention / netting (appropriate to the installation environment) as applicable. Dialight products are intended for ultimate purchase, installation and operation by knowledgeable persons trained in the functional assessment, installation, use and maintenance of such products and all customers (including but not limited to end customers) are responsible for assessing the suitability of Dialight products for any given installation requirement. It is the exclusive responsibility of the contractor, installer and/or end-user to: (a) determine the suitability of the product for its intended application; and, (b) ensure that the product is safely installed (with secondary retention / netting as appropriate) and in compliance with all applicable laws and regulations.

Product specifications & warranties. All product information provided is, to the best of Dialight's knowledge, accurate as of the date of publication. All values and performance data herein are design or typical values when measured under laboratory conditions. The information herein is subject to change without notice. The products / software detailed herein are subject to applicable warranties and terms and conditions of use/purchase. Unless agreed otherwise in writing by an authorized representative of Dialight, Dialight does not represent that its products are fit for any particular purpose and accepts no liability for the installation and/or unauthorised use of its products. When ordering, refer to www.dialight.com for current versions of: (a) relevant product documentation (including relevant product data sheets); (b) Dialight terms and conditions of sale; and, (c) the relevant product warranties. To the extent that any contract is deemed formed between Dialight and the purchaser of Dialight products and/or an end-user, versions of documents available at www.dialight.com as at the date of sale shall be the versions incorporated therein. In the event of any discrepancy between this document and information provided at www.dialight.com, the latter shall prevail.

Exclusion of liability. To the extent permissible under the relevant law, Dialight disclaims all liability for personal injury and/or other damage resulting from any dislodgment or other dislocation of its products. Whilst Dialight has used its reasonable endeavours to ensure the completeness and accuracy of information herein, Dialight does not assume any liability for damages resulting from use of this information or for any third-party representations made in relation to Dialight products.