



# Survive-All™ SVX Series

NSF & NEMA-4X Certified Exit Sign




**NEMA-4X**



## Outline and Dimensions

Dimensions are approximate and subject to change.

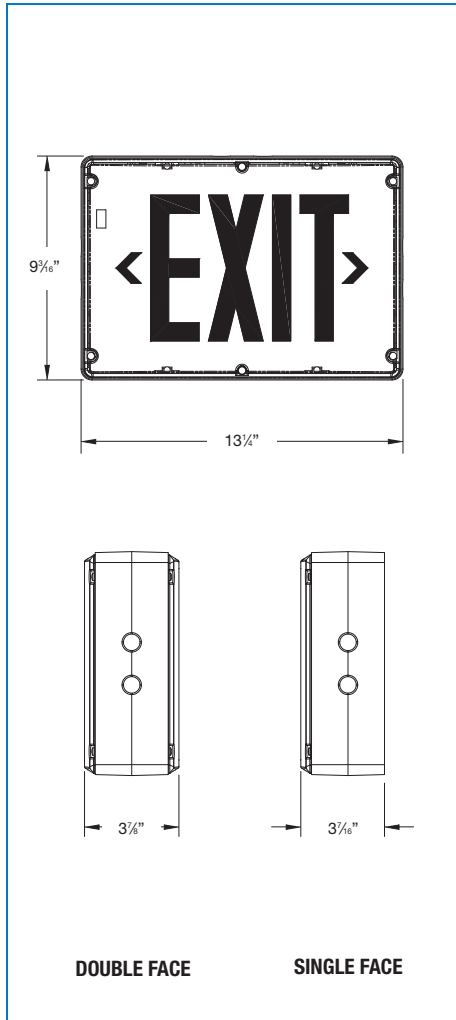

## Standard Features

- Rugged PVC body will not dent, peel or corrode. The sealed faceplate is constructed with a heavy duty, vandal-resistant polycarbonate cover and fastened with stainless steel tamper-resistant screws.
- Available with sealed, maintenance-free Nickel-Cadmium batteries.
- PulsePlus Charger circuitry offers 120/277 volt input 60 Hz., 0.3/0.15 Amps (other inputs available), fused output circuit(s), dual diagnostic indicator lights, temperature compensated charger, sealed relay, low voltage battery disconnect, brownout protection and lockout (automatic battery connect). Magnetically operated test switch.
- Can be wall, end or ceiling mounted.
- NEMA 4X Rated. NSF Certified. UL Listed. Listed for wet and damp locations (+10°C/+40°C).
- 5-year full warranty.



## Optional Features

Description	Add Suffix
AC/DC (6-48Vdc) .....	-DC
Cold Weather (-20°C)/(-4°F) (Self-Powered) .....	-CW
2 Circuit (120/120 or 277/277) .....	-2CKT*
Fire Alarm Activated Flasher (Self-Powered Only) .....	-FA
Flasher/Buzzer (Self-Powered Only) .....	-FB
Canopy Pendant Mount .....	-CM
Special Wording (Contact Factory)	

\* AC Units only.

### Accessories (order as a separate item)

Tamper-Proof Bit .....	part # 690.0454-E
Convert single to double face, red .....	DFKR
Convert single face to double face, green .....	DFKG

## High Performance Circuitry

- Self Contained – Batteries and circuitry located inside the exit housing.
- Continuous self-diagnostic monitoring and monthly self testing.
- Fully automatic charger is solid state.
- AC, AC/DC and Self-Powered Models have universal, 2-wire input 120V to 277Vac 50/60 Hz.
- Sealed, maintenance-free Nickel-Cadmium battery provides 90 minutes of emergency operation.
- Batteries recharge per UL924 requirements.
- Each unit comes standard with one tamper-proof driver bit. To order extra: part #690.0454

## Power Consumption

Model	AC Specs		DC Specs	
AC-only	120 to 277 Vac	1.2 W	-	-
AC/DC	120 to 277 Vac	1.2 W	6 to 24Vdc	Less than 1.5 W
Self-powered	120 to 277 Vac	3.7 W	NiCad battery	Min. 90 minutes

## How to Order (example)

BB	SVXN	1	R	-D	-4X	-FA
<b>Color Option, Housing/Face</b> <b>BB</b> = Black/Black <b>GA</b> = Gray/Aluminum <b>BW</b> = Black/White <b>WB</b> = White/Black <b>BA</b> = Black/Aluminum <b>WW</b> = White/White <b>GB</b> = Gray/Black <b>WA</b> = White/Aluminum <b>GW</b> = Gray/White	<b>Series (120/277 Volt)</b> <b>SVX</b> = AC-only <b>SVXN</b> = Self-powered Nickel-Cadmium Battery	<b>Faces</b> <b>1</b> = Single face <b>2</b> = Double face	<b>Legend colors</b> <b>R</b> = Red <b>G</b> = Green	<b>Diagnostics</b> Standard on all self-powered Models	<b>Housing</b> NEMA 4X housing standard	<b>Options</b> See Optional Features