

Catalog Number
Notes
Type

## FEATURES & SPECIFICATIONS

### INTENDED USE

Provides general illumination in residential applications. Ideal for use in closets, foyers, hallways, corridors, bedrooms, offices, utility work areas, stairways and more. **If required for commercial applications or operation more than eight (8) hours per day, use model FMLSL.**

### CONSTRUCTION

Features a white acrylic diffuser and is available in 12" and 15" sizes. Hidden cam-latches provide easy diffuser removal for installation and maintenance.

### OPTICS

12" units produce 1400 lumens and 15" units produce 2100 lumens, both at 50,000 hours life.

### ELECTRICAL

Fixture operates at 120 volts, 60 Hz. 12" Standard input = 20 watts, 70 lumens per watt.

15" Standard input = 30 watts, 70 lumens per watt.

Works with most standard incandescent dimmers (see list of approved dimmers).

### INSTALLATION

All mounting hardware included.

### LISTINGS

cUL Certified to US and Canadian standards and listed suitable for damp locations.

### WARRANTY

5-year limited warranty. Complete warranty terms located at [www.acuitybrands.com/CustomerResources/Terms\\_and\\_conditions.aspx](http://www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx)

Note: Specifications subject to change without notice.

Decorative Indoor

# Residential LED Low Profile Square

## Flush Mount



HIGH-PERFORMANCE LED



### Specifications

	12"	15"
Diameter:	12 (30.5)	14.75 (37.5)
Depth:	3.25 (8.3)	3.38 (8.6)
Weight:	1 lbs (.5 kg)	1.5 lbs (.7 kg)

All dimensions are inches (centimeters) unless otherwise indicated.

### ORDERING INFORMATION

For shortest lead times, configure product using **bolded options**.

**Example:** FMLSDL 12 14840



Series	Module/CRI	Color temperature
<b>FMLSDL 12</b> 12" Residential LED low profile square flush mount	<b>148</b> >80	<b>40</b> 4000 K
<b>FMLSDL 15</b> 15" Residential LED low profile square flush mount	<b>218</b> >80	35 3500 K <sup>1</sup>
		30 3000 K <sup>1</sup>
		27 2700 K <sup>1</sup>

### Notes

<sup>1</sup> Minimum 90-day lead time for non-standard color temperatures; minimum 50 order quantity.

# Residential LED Low Profile Square Flush Mount

## LIGHTING FACTS

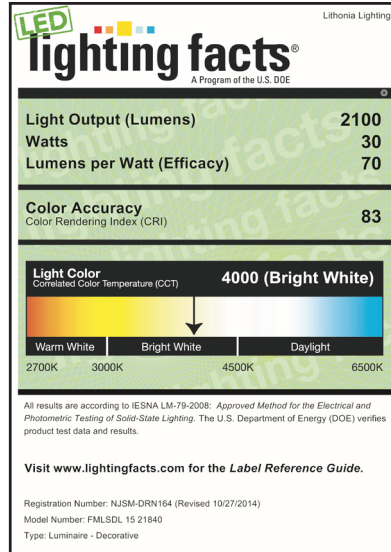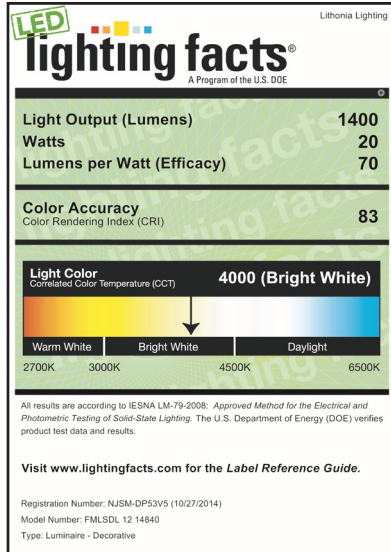

### SUGGESTED DIMMERS

The FMLSDDL is designed to operate with most standard Triac Based dimmers and is not compatible with 0-10v dimming systems. The following is a list of dimmers tested and does not imply any guarantee or warranty of compatibility with a particular application. Unlisted dimmers do not imply non-compatibility.

Manufacturer	Part number(s)
Lutron	CT-600P/CT-603P
	DV-600P/DV-603P
	CTCL-153P
	DVCL-153P
	AYCL-153P
Leviton	DVELV-300P
	R50-IPL06
Pass & Seymour	6615-P
	HCL453PTCCCV6

## PHOTOMETRICS

Full photometric data report available two weeks from request. Consult factory.