

TELESCOPING HOT STICKS

The original Tel-O-Pole® Hot Stick is designed for long reach, speed, convenience and safety. All sections are fabricated with reinforced electrical grade fiberglass, for greater strength and high dielectric properties.

FEATURES AND BENEFITS:

- For opening and closing disconnect switches
- Replacing fuses on transformers
- Pruning tree limbs
- Fluorescent green tip section is highly visible and has a foam core
- Several models and lengths available

STANDARD TEL-O-POLE® HOT STICK

This style stick can be locked at each length listed. The tip diameter for this model is 7/8". Tip section will not interlock.

CAT NO	EXTENDED	RETRACTED	BASE DIA	LBS	CASE
S-212	12'	44"	1 5/8"	3.8	C-212
S-216	12'4" - 16'	56"	1 5/8"	4.5	C-30
S-220	17' - 20'	58"	1 7/8"	5.5	C-30
S-225	17' -21' - 25.5'	60"	2 3/16"	7.0	C-30
S-230	17' -21.5' -26' -30'	61 5/8"	2 3/8"	8.8	C-30
S-235	17' -21.5' -26' -30' - 35'	63 3/8"	2 11/16"	11.0	C-35
S-240	22' -26' -30' -35' -40'	65 3/8"	2 7/8"	13.9	C-40
S-245	22' -26' -30' -35' -40' -44.5'	67"	3 3/16"	16.5	C-45

TEL-O-POLE® HOT STICK WITH TIP LOCK FEATURE

Tip retracts and locks into next larger section. The tip diameter for this model (extended) is 7/8" or (retracted) is 1 3/32".

CAT NO	EXTENDED	RETRACTED	BASE DIA	LBS	CASE
ST-225	17' -21' -25.5'	60"	2 3/16"	7.0	C-30
ST-230	17' -21.5' -26' -30'	61 5/8"	2 3/8"	8.8	C-30
ST-235	17' -21.5' -26' -30' -35'	63 3/8"	2 11/16"	11.0	C-35
ST-240	22' -26' -30' -35' -40'	65 3/8"	2 7/8"	13.9	C-40
ST-245	22' -26' -30' -35' -40' -44.5'	67"	3 3/16"	16.5	C-45

HEAVY DUTY TEL-O-POLE® HOT STICK


The tip diameter for this model is 1 3/32". All sections will interlock.

CAT NO	EXTENDED	RETRACTED	BASE DIA	LBS	CASE
SH-216	9' -13' -17'	58 1/8"	1 7/8"	4.8	C-30
SH-200	13' -17.5' -21.5'	60"	2 3/16"	6.5	C-30
SH-250	13' -17.5' -21.5' -26'	61 5/8"	2 3/8"	8.3	C-30
SH-230	13' -17.5' -21.5' -26' -30'	63 3/8"	2 11/16"	10.3	C-35
SH-235	17' -21.5' -26' -30' -35'	65 3/8"	2 7/8"	13.0	C-35
SH-240	17' -21.5' -26' -30' -35' -40'	67"	3 3/16"	15.9	C-45

EXTENSION SECTION

The extension section mounts on universal end to get additional length.

CAT NO	LENGTH	LBS
839-2	56"	2.0

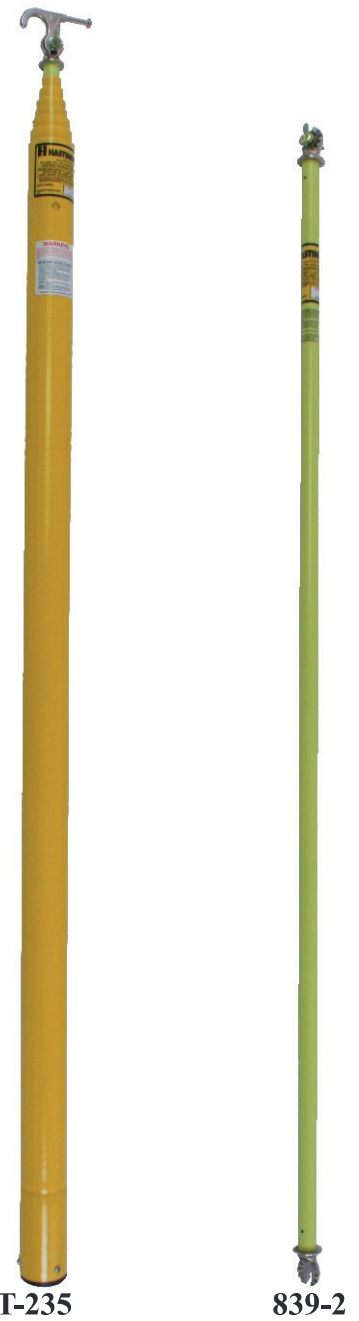

TEL-O-POLE SLIDE STOP
See Page 101 for details

