
Kellems<sup>®</sup> Wire Management Products **PolyTuff<sup>®</sup> Non-Metallic and Metallic Liquidtight Conduit Fittings** *Features and Benefits* 





HUBBELL<sup>®</sup> Wiring Device-Kellems



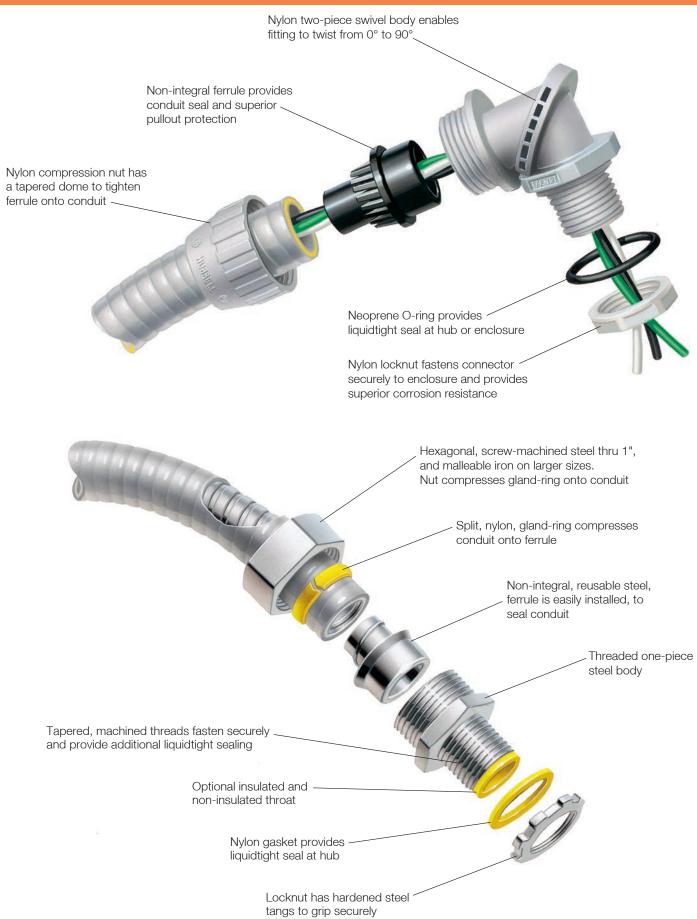

P075NGYA



P125NGY



PS0509NGY SwivelLok® Multi-Position



P1259NGY



Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
1⁄4 (10)	F2025	_
% (12)	P038NBKA	P038NGYA
½ (16)	P050NBKA	P050NGYA
3⁄4 (21)	P075NBKA	P075NGYA
1 (27)	P100NBKA	P100NGYA
1¼ (35)	P125NBK	P125NGY
11⁄2 (41)	P150NBK	P150NGY
2 (53)	P200NBK	P200NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.

See pages V-104 and V-105 for technical information and dimensional drawings.

%" Liquidtight conduit fitting have 1/2 NPT male threads.

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
3⁄8 (12)	PS0389NBK	PS0389NGY
1⁄2 (16)	PS0509NBK	PS0509NGY
3⁄4 (21)	PS0759NBK	PS0759NGY
1 (27)	PS1009NBK	PS1009NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II.

See pages V-104 and V-105 for technical information and dimensional drawings.

%" Liquidtight conduit fitting have ½ NPT male threads.

## **Fixed 90°Fittings for Non-Metallic Conduit**

Trade Size (metric designator)	Black Catalog Number	Gray Catalog Number
<b>⅔</b> (12)	P0389NBK	P0389NGY
1⁄2 (16)	P0509NBK	P0509NGY
3⁄4 (21)	P0759NBK	P0759NGY
1 (27)	P1009NBK	P1009NGY
1¼ (35)	P1259NBK	P1259NGY

Note: Fittings are to be used with PolyTuff I and PolyTuff II. See pages V-104 and V-105 for technical information and dimensional drawings.

%" Liquidtight conduit fitting have 1/2 NPT male threads.

## SwivelLok<sup>®</sup> Flexible Conduit Kit

Trade Size (metric designator)	Fitting and Conduit	Catalog Number
1⁄2 (16)	2 PS0509NGY, 6' G1050	PS05GYKIT
34 (21)	2 PS0759NGY, 6' G1075	PS07GYKIT

Note: See pages V-104 and V-105 for technical information and dimensional drawings.



PS05GYKIT