
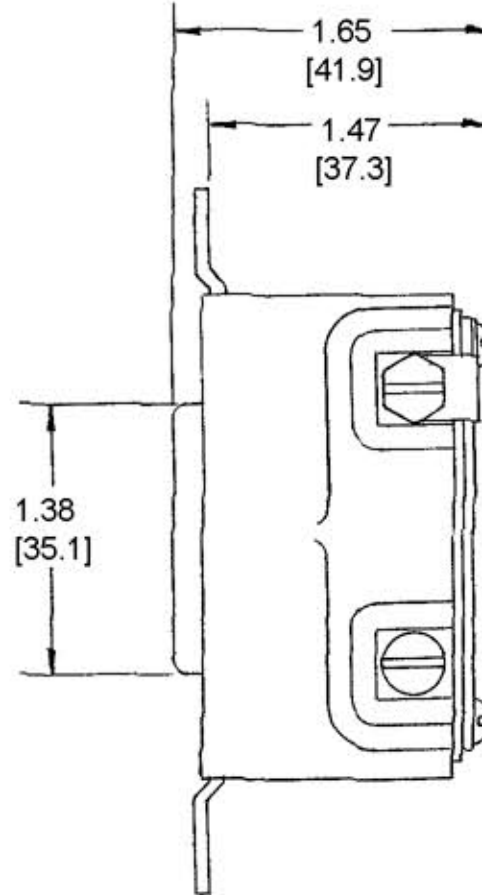


M-5439

1

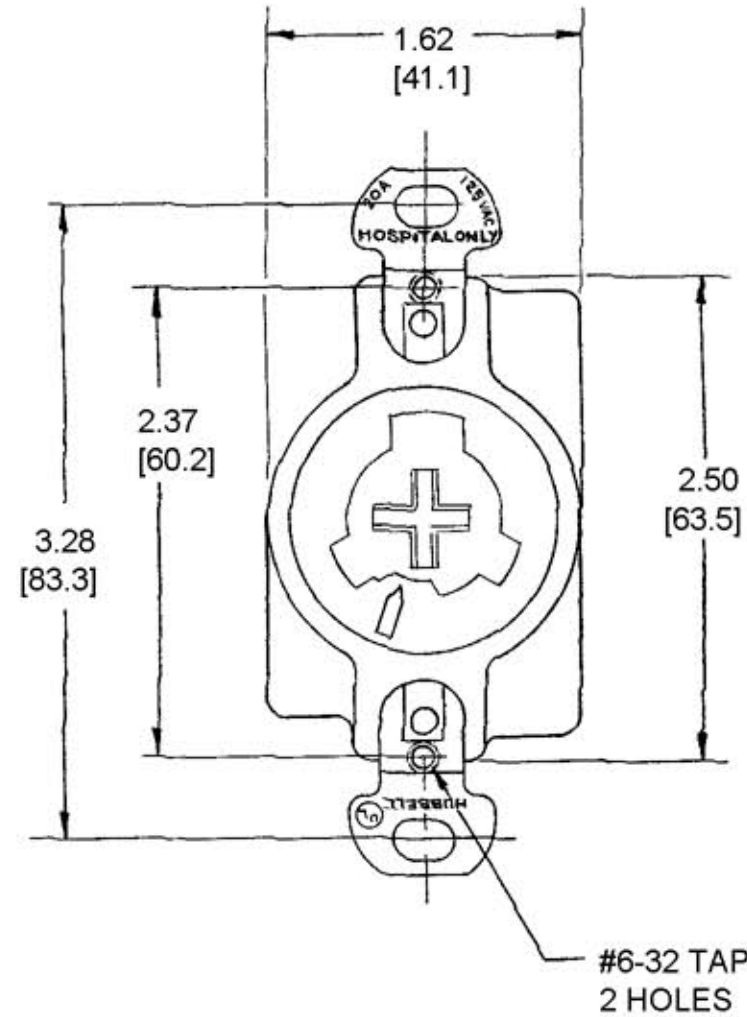

NOTES:

1. ALL DIMENSIONS TO BE IN INCHES.
[mm]
2. WIRE CAPACITY: #14AWG TO #10AWG, SOLID OR STRANDED COPPER WIRE ONLY.

LIST OF PARTS

DESCRIPTION	MATERIAL	FINISH
BASE	BAKELITE	BLACK
CENTER SLIDER	BAKELITE	GRAY
CONT. SP BIND. PLATE	.025 BRONZE	BRASS PL. 1-WHITE
BINDING SCREWS	BRASS	1-WHITE
HEX. HD. BIND. SC.	BRASS	GREEN
AUXILIARY SPRING	.018 BRONZE	
INSULATOR	.062 LAMP PHEN	
SUPPORTING STRAP	.062 STEEL	ZINC PL.
COILED SPRING	.032 X .062 WIRE	
END PLATES	.050 C.R.S.	ZINC PL.
GR. SHUNT	.015 BRASS	

DIMENSION SHEET FOR CAT. NO. HBL23000HG
 REPAIRABLE NON-REPAIRABLE

1	ADDED NOTES 1 & 2; HBL23000HG WAS 23000HG; CONVERTED ALL DIMS. TO DECIMAL & METRIC PER DCN 11902 RCM	JPP	1/25/05
SYM	REVISIONS	APP	DATE

B
M-5439

TITLE
 20A 125VAC, 3 WIRE
 HOSPITAL GENERAL USE
 HUBBELLOCK GROUNDING OUTLET

HARVEY HUBBELL, INC.
 BRIDGEPORT, CONN.

TOLERANCES UNLESS OTHERWISE SPECIFIED
 FRACTIONS ± 1/64
 DECIMALS ± .005
 ANGLES ± 2°

DR. BY ASM APP. BY _____
 TR. BY _____ SCALE 1=1
 CHK'D BY _____ DATE 2-10-72