
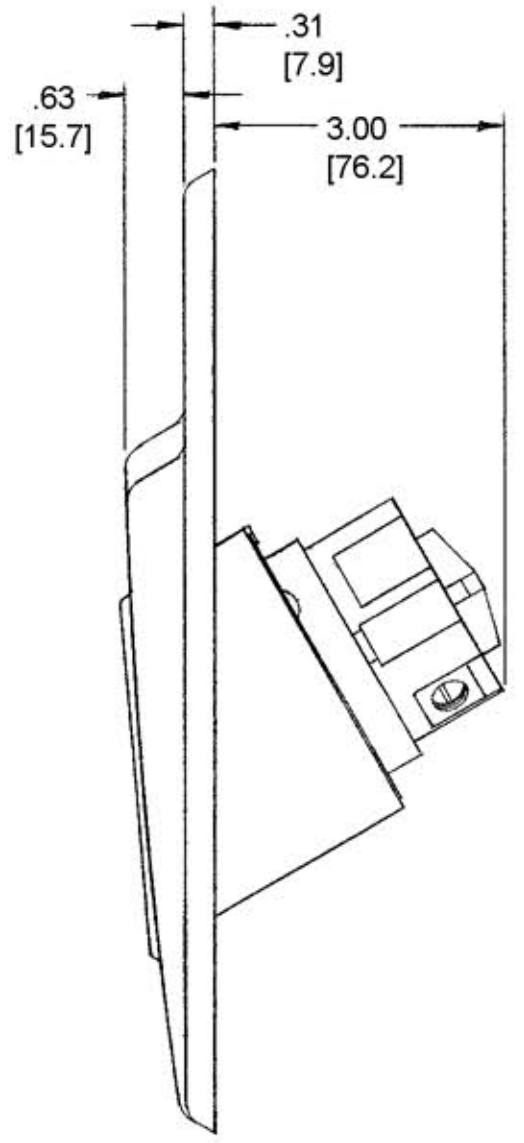


M-5433 1

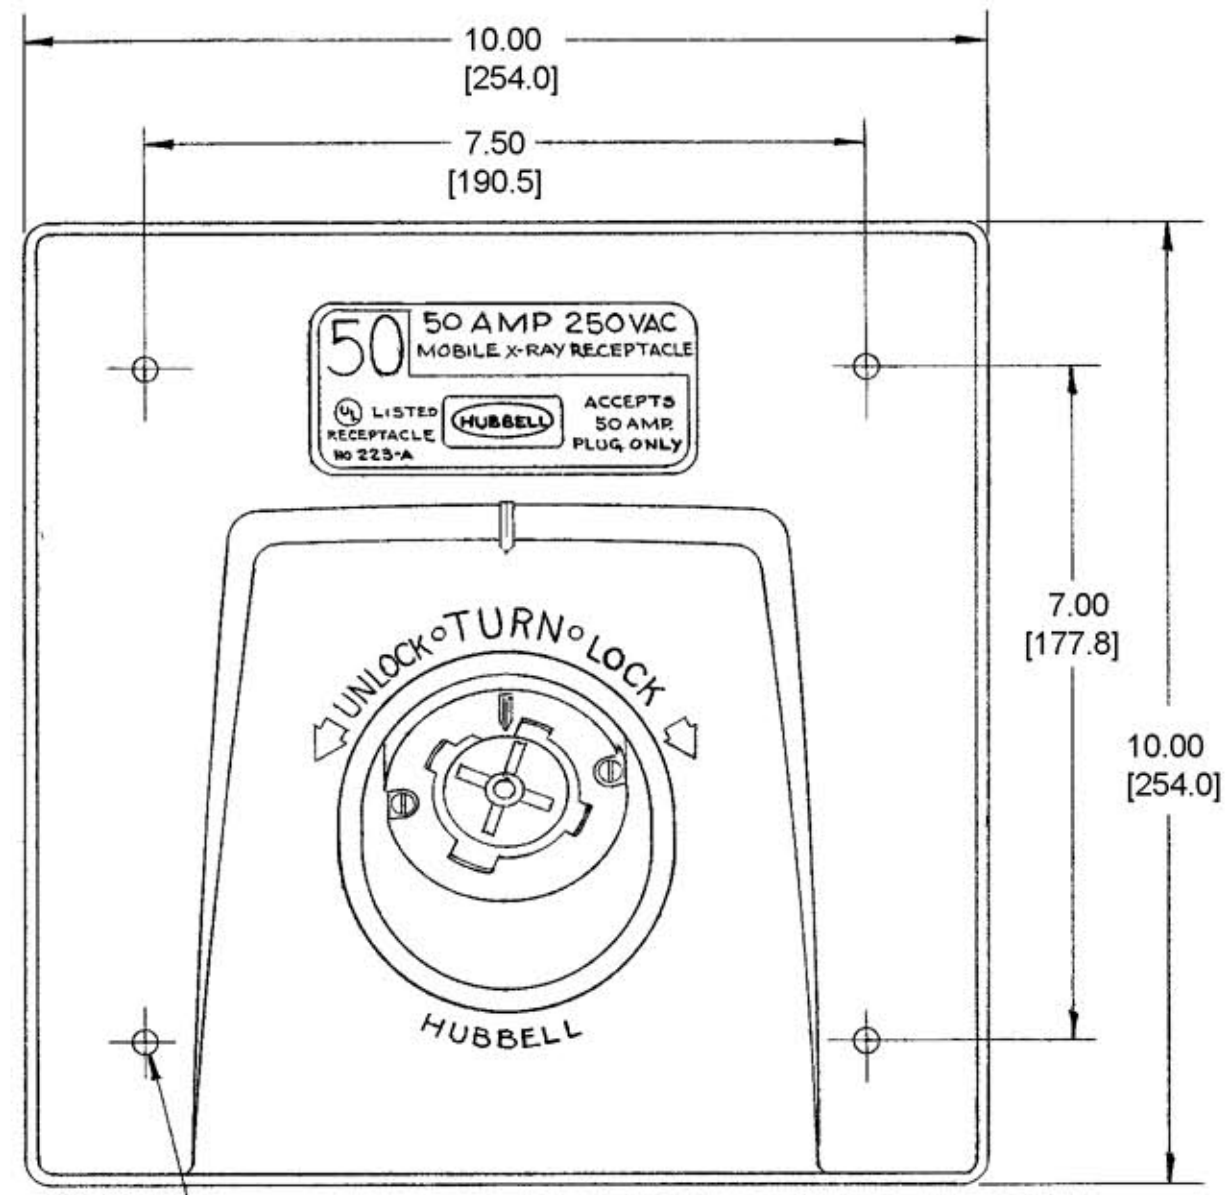

Ø .265 [6.7]
4 HOLES

- NOTES:
 1. WIRE CAPACITY: #6AWG TO #2AWG, SOLID OR STRANDED COPPER WIRE ONLY.
 2. ALL DIMS. TO BE INCHES.
 [mm]

LIST OF PARTS		
DESCRIPTION	MATERIAL	FINISH
INSULATORS	DUREZ	BLACK
CONTACT SPRINGS	.040 COPPER	
GR. SHUNT	.020 BRASS	
CLAMPS	ALUMINUM	I-GREEN
CENTER POST	STEEL	ZINC PL.
AUX. SPRING	.020 BRONZE	
COIL SPRING	.055 ST. WIRE	COPPER PL.
CASING	.025 BRASS	ZINC PL.
COVER	CAST ALUM	GRAY

DIMENSION SHEET FOR CAT. NO. HBL25503
 REPAIRABLE NON-REPAIRABLE

1	ADDED NOTES 1&2; "HBL25503" WAS "25503"; CONVERTED ALL DIMS. TO DECIMAL & METRIC PER DCN 11902 RCM	JPP	1/28/05
SYM	REVISIONS	APP	DATE

B
 M-5433

TITLE
 50A 250VAC, 2 POLE, 3 WIRE
 MOBILE X-RAY HUBBELLOCK OUTLET
 GROUNDED

TOLERANCES UNLESS OTHERWISE SPECIFIED		HARVEY HUBBELL, INC.	
FRACTIONS ± 1/64		BRIDGEPORT, CONN.	
DECIMALS ± .005		DR. BY <u>ASM</u>	APP. BY _____
ANGLES ± 2°		TR. BY _____	SCALE <u>HALF</u>
		CHK'D BY _____	DATE <u>2-8-72</u>