


SINGLE MODULE LED INDEPENDENCE HIGH BAY

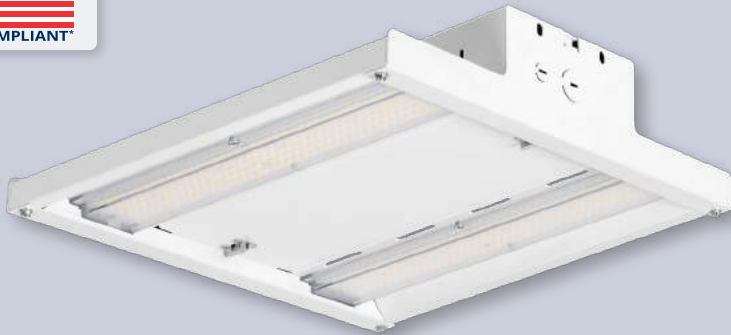

- Ultra compact (14"W x 3.22"H x 13.66"L)
- Easy to install
- Smooth & uniform light

ORDERING INFORMATION

CATALOG #	LUMENS	WATTAGE	LPW	CRI	CCT	VOLTS	REC. MNT. HEIGHT	AMBIENT TEMP. RATING
IHB12L	11,861	79 Watt LED	150	80	4500K	120-277	12' - 16'	50°C (122°F)
IHB15L	15,388	105 Watt LED	146	80	4500K	120-277	12' - 18'	50°C (122°F)
IHB18L	17,850	123 Watt LED	146	80	4500K	120-277	14' - 20'	50°C (122°F)
IHB24L	24,030	164 Watt LED	147	80	4500K	120-277	18' - 30'	50°C (122°F)
IHB30L	28,160	185 Watt LED	152	80	4500K	120-277	20' - 35'	40°C (104°F)

Also available in 4000K and 5000K. See Cut Sheet for more information.

ACCESSORIES

CATALOG #	DESCRIPTION
CH36	Chain Set
CH36HFC	Chain Set w/Hammer-On Flange Clip
CA36	Cable Set
MS360 ¹	360° Motion Sensor

OPTIONS

ADD SUFFIX #	DESCRIPTION	ADD SUFFIX #	DESCRIPTION
xC*	x' Cord (No Plug)	M	Motion Sensor (120/277v)*
xT*	x' 120V Cord & Plug	M2	Motion Sensor (208/240/480v)**
xE*	x' 208V Cord & Plug	P	Pendant Mount
xF*	x' 240V Cord & Plug	W	Wireguard
xS*	x' 277V Cord & Plug	IC	Integrated Control
EB	Emergency Back-Up	4	480V Driver
BTM	Bluetooth Motion	SP	Surge Protection

*x = 3 for 3' Cord; 6 for 6' cord, 10 for 10' cord; and 20 for 20' cord lengths

**End Panel Mounted



*Qualifies for Buy American under ARRA

*The majority of Atlas Lighting Products are assembled in USA facilities by an American Workforce utilizing both Domestic and Foreign components

Scan QR CODE
for more information

