



# Wet Location

Project Information	
Job Name	
Fixture Type	Industrial LED Wet Location
Catalog Number	ILW25LED2D
Approved by	

## ILW25LED2D 2FT Industrial LED



### SPECIFICATIONS:

**Lumens:** 2,803  
**Watts:** 25.13  
**Lumens/Watt:** 111.54  
**CRI:** 82  
**CCT:** 4013  
**Lifespan:** 200,000+ hrs.<sup>1</sup>



### Construction:

The 1-piece housing is made of durable composite material with 1/2" entry points on both ends. The poured gasket provides a continuous seal for the lens. Six polycarbonate cam latches compress lens to housing for a tight seal. Stainless steel mounting brackets are furnished with each fixture.

### Lens:

Injection molded acrylic lens with high impact additive. Lens is ribbed and frosted to eliminate glare.

### Listings:

Luminaire is certified to cUL Standards for Wet Locations  
 Lighting Facts Certified  
 DesignLights Consortium qualified luminaire, eligible for rebates from DLC member utilities.

### AC Input:

120/208/240/277 V

### Driver:

Constant current, Class 2 120-277 VAC, 47-63Hz  
 High Efficiency – min. 81%  
 Off-State Power: 0 Watts  
 0-10 V Dimming

### LEDs:

Atlas LEDs provide higher lumen output, greater energy efficiency and more reliable fixture performance. LEDs manufactured for the ILW series utilize Epoxy Guard conformal coating which reduces the chance of board corrosion.

ILW series fixtures operate at 4100K CCT

### Temperatures:

Min Start: -40°C Max: 40°C

### Ratings:

NEMA4X  
 IP65  
 NSF

### Installation:

Fixture retains the same knock-out sizes and positions as previous models, reducing wiring costs.

### Applications:

Cold storage, garages, refrigerated cases, stairwells, storage areas, fuel pump canopy.

### Testing:

Atlas LED luminaires have been tested by an independent laboratory in accordance with IESNA LM-79 & LM-80, and have received the Department of Energy "Lighting Facts" label.

**Warranty:** Five-year limited warranty


**Options:** L = Stainless Steel Latches, 3C = 3' Cord, 6C = 6' Cord

**Weight:** 4.4 lbs.



Patent Pending

### DIMENSIONS:

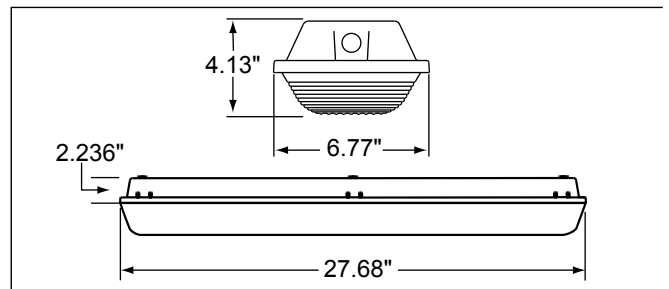

<sup>1</sup>LED Life Span Based Upon LM-80 Test Results

**Rebates and Incentives are available in many areas. Contact an Atlas Representative for more information.**

## ATLAS LIGHTING PRODUCTS, INC.

PO BOX 2348 | BURLINGTON, NC 27216  
 800-849-8485 | FAX: 336-227-0110 | www.atlaslightingproducts.com

Made in the USA of US and imported parts. Meets Buy American requirements within the ARRA.

**IP RATING**

	DESCRIPTION	DEFINITION
<b>6</b>	Dust-tight	No ingress of dust
<b>5</b>	Protects against water jets	Water projected from a nozzle against the enclosure from any direction shall have no harmful effect.

Atlas Lighting Products

**lighting facts**<sup>®</sup>

A Program of the U.S. DOE

---

<b>Light Output (Lumens)</b>	<b>2803</b>
<b>Watts</b>	<b>25.13</b>
<b>Lumens per Watt (Efficacy)</b>	<b>111.54</b>

---

<b>Color Accuracy</b>	<b>82</b>
Color Rendering Index (CRI)	

---

**Light Color**  
Correlated Color Temperature (CCT) **4013 (Bright White)**

Warm White	Bright White	Daylight
2700K	3000K	4500K

---

All results are according to IESNA LM-79-2008: *Approved Method for the Electrical and Photometric Testing of Solid-State Lighting*. The U.S. Department of Energy (DOE) verifies product test data and results.

Visit [www.lightingfacts.com](http://www.lightingfacts.com) for the *Label Reference Guide*.

Registration Number: PRB4-PG7LGH (12/10/2014)  
Model Number: ILW25LED2D  
Type: Luminaire - Linear