

Air Production Drills

Pistol Grip

5 Series

Durability and performance are the hallmarks of these proven winners.

Features

- Stall Torque: 20 – 79.7 in-lbs (2.3 – 9.0 Nm)
- Speeds: 900 – 2000 rpm
- Power: 0.40 hp
- Variable speed control allows slow starting and high speed for fast drilling
- Skinsulate housing for operator comfort and productivity
- Excellent power-to-weight ratio gets the job done with less fatigue

Service and Accessories

Manuals:



P7092

Accessories:

Piped away exhaust kit: 5L-K184
Horizontal hanger: 5RA-A365
Chuck: 6A-99
Dead handle: 728N-A48, (requires 2): 5A-49

Kits:

Tune-up kit: 5RA/5RL-TK1




5RANST8

	Max Nm	1 min.	lbs (kg)	in (mm)	Max. in (mm)	in (mm)	cfm (L/min)
Model	in-lbs (Nm)	rpm	lbs (kg)	in (mm)	in (mm)	in (mm)	cfm (L/min)
DC TRIGGER START							
5RALST6	35.4 (4.0)	2,000	2.2 (1.0)	6.2" (157)	3/8" (10)	0.8" (21)	17 (480)
5RANST8	70.8 (8.0)	900	3.0 (1.4)	8.3" (210)	1/2" (13)	0.8" (21)	17 (480)
5RANST6	70.8 (8.0)	900	3.0 (1.4)	8.3" (210)	3/8" (10)	0.8" (21)	17 (480)
C TRIGGER START							
5AHST4	20 (2.3)	5,000	2.0 (0.9)	6.8" (173)	1/4" (6)	0.8" (21)	17 (480)
5AJST4	20 (2.3)	4,500	2.0 (0.9)	6.8" (173)	1/4" (6)	0.8" (21)	17 (480)
5AKST4	30.1 (3.4)	3,000	2.0 (0.9)	6.8" (173)	1/4" (6)	0.8" (21)	17 (480)
5ALST4	39.8 (4.5)	2,200	2.0 (0.9)	6.8" (173)	1/4" (6)	0.8" (21)	17 (480)
5ANST6	79.7 (9.0)	1,000	2.8 (1.3)	8.1" (207)	3/8" (10)	0.8" (21)	17 (480)


Series				
5	0.40 hp	75 dBa	1/4" NPT	1/4" (6 mm)

Model Identification Guide


QC Air Tool Qualifiers

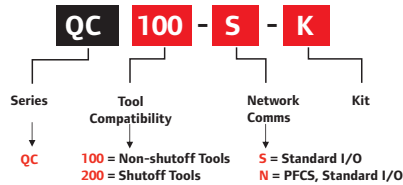


1, 5, 6 & 7 Series Air Inline & Pistol Drills

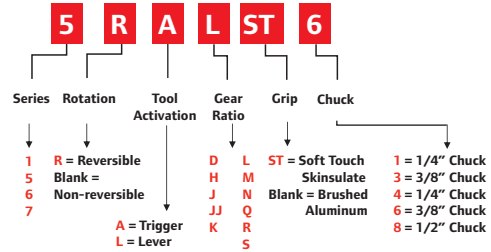


Q2 Series Air Drills

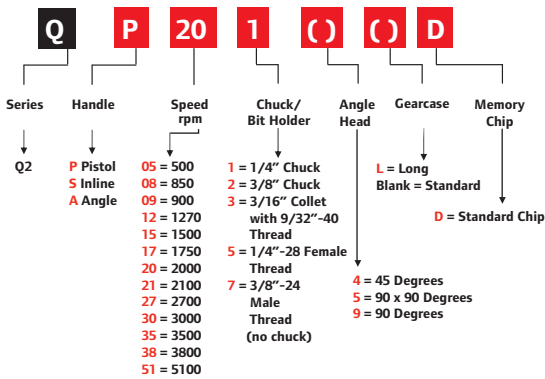

20 & 50 Series Air Drills

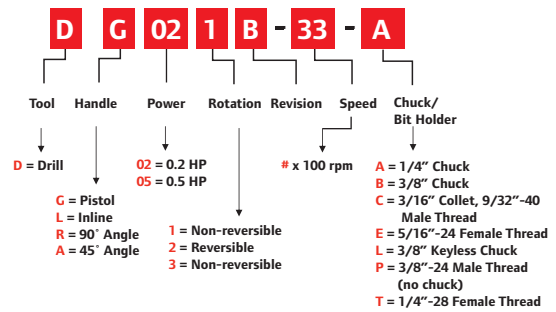

728 Series Air Pistol Drills



1, 5, 6 & 7 Series Air Angle Drills

