



Cyclone Select Series and CycloVac System (composite housing)

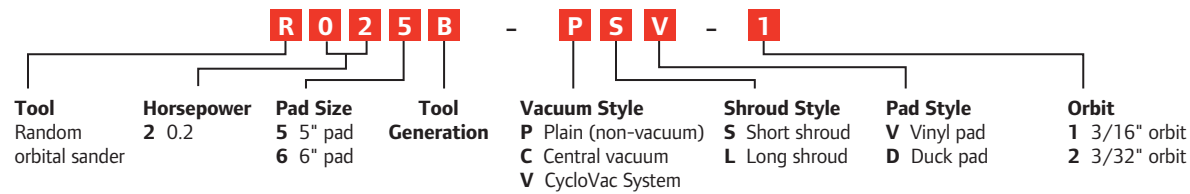

Model	Shroud Style	Pad Face in (mm)	rpm	hp	@ Free Speed scfm	Female	lb (kg)
NON-VACUUM							
R025B-PSV-1*	Short	5" (127)	12,000	0.2	15.8	5/16"-24	1.8 (0.8)
R026B-PSV-1	Short	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R025B-PSV-2	Short	5" (127)	12,000	0.2	15.8	5/16"-24	1.8 (0.8)
R026B-PSV-2	Short	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
VACUUM-READY**							
R025B-CSV-1*	Short	5" (127)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R026B-CSV-1	Short	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R026B-CSV-2	Short	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R025B-CLV-1	Long	5" (127)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R026B-CLV-1	Long	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
CYCLOVAC***							
R025B-VLV-1**	Long	5" (127)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)
R026B-VLV-1**	Long	6" (152)	12,000	0.2	15.8	5/16"-24	1.9 (0.9)

Cyclone Standard Series (aluminum housing)

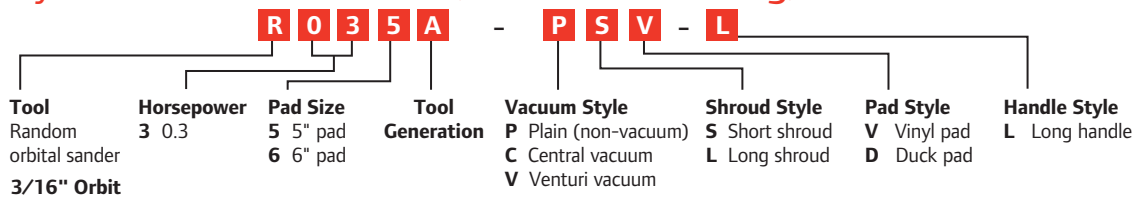

Model	Long Handle in (mm)	Pad Face	rpm	hp	@ Free Speed scfm	Female	Palm style lb (kg)	Long handle lb (kg)
NON-VACUUM								
R035A-PSV*	R035A-PSV-L 5" (127)	Vinyl	10,000	0.3	18.5	5/16"-24	2.3 (1.0)	2.6 (1.2)
R036A-PSV*	R036A-PSV-L 6" (152)	Vinyl	10,000	0.3	18.5	5/16"-24	2.3 (1.0)	2.6 (1.2)
VACUUM-READY**								
R035A-CSV*	5" (127)	Vinyl	10,000	0.3	18.5	5/16"-24	2.4 (1.1)	N/A
R036A-CSV	6" (152)	Vinyl	10,000	0.3	18.5	5/16"-24	2.4 (1.1)	N/A
VENTURI-VAC***								
R035A-VLV**	5" (127)	Vinyl	10,000	0.3	18.5	5/16"-24	2.4 (1.1)	N/A
R036A-VLV**	6" (152)	Vinyl	10,000	0.3	18.5	5/16"-24	2.4 (1.1)	N/A

*Most popular models.

**Sanding pads have industry-standard hole pattern for "thru-the-pad" vacuum pickup.

For use with coated sanding discs with pre-punched holes.

Air inlet is 1/4" NPT female; recommended air pressure is 90 psi.

Recommended hose size is 5/16" (8 mm) I.D.

***Standard Equipment: (3) 49973 Bag

(1) 49997 Bag cover

1 49979 Adapter

1 49982 Hose

1 49986 Collar