




STUBBY SPLINE RATCHETING WRENCH



FEATURES

- ▶ Black chrome finish is corrosion resistant and visually distinctive.
- ▶ Anti-Slip Design (ASD) open end.
- ▶ 72 tooth ratcheting mechanism rotates fast with only 5 degrees of swing.
- ▶ The chrome-vanadium switch lever allows for easy changes in turning direction which helps improve speed.
- ▶ 15° angled offset helps keep shank clear of obstructions.
- ▶ Chrome-vanadium box ends and switch levers provide high strength and durability.
- ▶ Box end is countersunk for easy application to the fastener.
- ▶ Spline design was created for use with specialty spline bolts which are used when weight and size of bolt heads must be minimized.
- ▶ Spline design enables the wrench to contact conventional fasteners away from the corners, which applies force over a larger area, reducing risk of fastener scoring and helps prevent rounding of the corners and other fasteners damage that could lead to Foreign Object Damage (FOD).
- ▶ The high contact surface area which is away from fastener points enables turning of highly rounded fastener.
- ▶ Compact size allows you to work in tight spots.
- ▶ Spline wrenches can be used on 4, 6, 12 point, spline and Torx® fasteners.

Torx® is a trademark of Acument Intellectual Properties, LLC

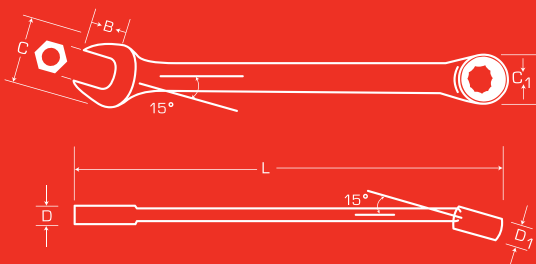

JSCV16S

STUBBY SPLINE RATCHETING WRENCHES

PRODUCT #	SIZE	OUTSIDE HEAD WIDTH (C)	OUTSIDE HEAD WIDTH (C1)	HEAD THICKNESS (D)	HEAD THICKNESS (D1)	OVERALL LENGTH	WEIGHT (LBS)
JSCV08S	1/4"	37/64"	9/16"	9/64"	1/4"	3-1/8"	0.06
JSCV10S	5/16"	41/64"	21/32"	5/32"	1/4"	3-1/2"	0.08
JSCV12S	3/8"	13/16"	25/32"	11/64"	9/32"	3-3/4"	0.11
JSCV14S	7/16"	29/32"	55/64"	3/16"	19/64"	4"	0.12
JSCV16S	1/2"	1-1/16"	63/64"	7/32"	11/32"	4-1/4"	0.16
JSCV18S	9/16"	1-9/64"	1-1/32"	15/64"	23/64"	4-1/2"	0.18
JSCV20S	5/8"	1-5/16"	1-11/64"	9/32"	25/64"	4-7/8"	0.24
JSCV22S	11/16"	1-13/32"	1-15/64"	17/64"	13/32"	5"	0.27
JSCV24S	3/4"	1-9/16"	1-5/16"	5/16"	7/16"	5-1/2"	0.36
JSCVM06S	6 mm	37/64"	9/16"	9/64"	1/4"	3-1/2"	0.06
JSCVM08S	8 mm	41/64"	21/32"	5/32"	17/64"	3-1/2"	0.08
JSCVM09S	9 mm	23/32"	47/64"	11/64"	17/64"	3-3/4"	0.09
JSCVM10S	10 mm	13/16"	51/64"	3/16"	9/32"	3-3/4"	0.10
JSCVM11S	11 mm	29/32"	55/64"	13/64"	19/64"	4"	0.14
JSCVM12S	12 mm	31/32"	29/32"	7/32"	21/64"	4-1/4"	0.15
JSCVM13S	13 mm	1-1/16"	63/64"	7/32"	11/32"	4-1/4"	0.18
JSCVM14S	14 mm	1-9/64"	1-1/32"	15/64"	23/64"	4-1/2"	0.21
JSCVM15S	15 mm	1-7/32"	1-3/32"	1/4"	3/8"	4-11/16"	0.24
JSCVM16S	16 mm	1-5/16"	1-5/32"	17/64"	25/64"	4-7/8"	0.33
JSCVM17S	17 mm	1-13/32"	1-1/4"	15/64"	13/32"	5"	0.38
JSCVM18S	18 mm	1-7/16"	1-1/4"	5/16"	7/16"	5-5/32"	0.41
JSCVM19S	19 mm	1-9/16"	1-5/16"	5/16"	7/16"	5-1/2"	0.47



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

©2014 Stanley Black & Decker, Inc. • 2195 East View Parkway, Suite 103, Conyers, GA 30013
1.800.800.TOOL • Fax: 1.770.648.9108 • protoindustrial.com



STUBBY SPLINE RATCHETING WRENCH



JSCVS-9S **9 PIECE STUBBY SPLINE REVERSIBLE** **RATCHETING WRENCH SET - SAE**

Size Range: 1/4" - 3/4"

JSCVMS-13S **13 PIECE STUBBY SPLINE REVERSIBLE** **RATCHETING WRENCH SET - METRIC**

Size Range: 6 mm - 19 mm



JSCVS-9S



JSCVMS-13S



WARNING: WORK SAFELY WITH TOOLS. WEAR SAFETY GOGGLES.

©2014 Stanley Black & Decker, Inc. • 2195 East View Parkway, Suite 103, Conyers, GA 30013
1.800.800.TOOL • Fax: 1.770.648.9108 • protoindustrial.com