


Cushion-Grip Nut Driver Sets

Features:



Tip-Ident® quickly identifies nut driver and size.

Internal flanges provide solid, twist-resistant shaft anchor.

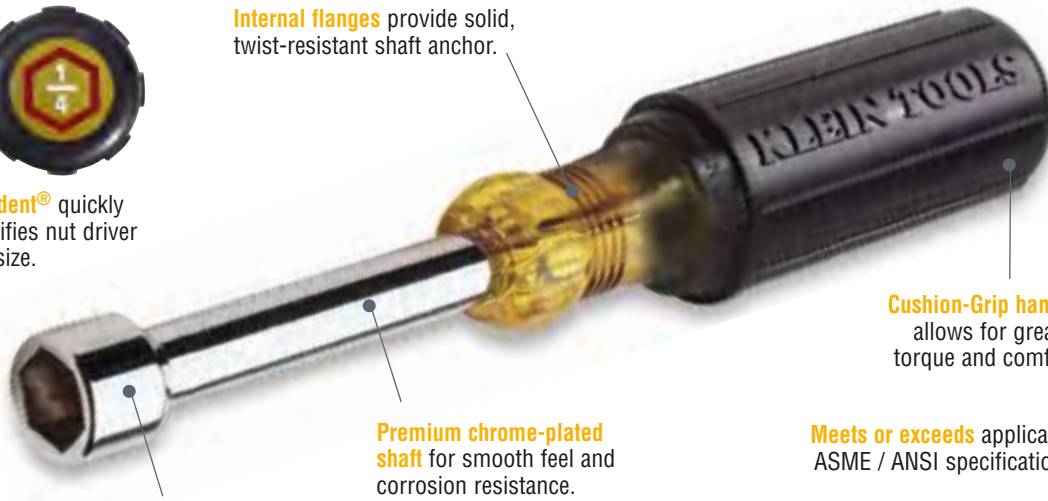

Cushion-Grip handle allows for greater torque and comfort.

Meets or exceeds applicable ASME / ANSI specifications.

Full hollow shafts facilitate work on stacked circuit boards or other long bolt applications.

Premium chrome-plated shaft for smooth feel and corrosion resistance.

Handle end is also color coded for easy identification.



7-Piece Cushion-Grip Nut Driver Set — 3" Shafts

- Set contains 630-3/16, 630-1/4, 630-5/16, 630-11/32, 630-3/8, 630-7/16, and 630-1/2. (See individual tool listings for more details.)

Cat. No.	Weight (lbs.)
631	1.50



631M

7-Piece Hollow-Shaft* Magnetic Tip Cushion-Grip Nut Driver Set — 3" Shafts

- Full hollow shaft for long bolts or studs, with magnetic tip.
- Set contains 630-3/16M, 630-1/4M, 630-5/16M, 630-11/32M, 630-3/8M, 630-7/16M, and 630-1/2M. (See individual tool listings for more details.)

Cat. No.	Weight (lbs.)
631M	1.50

*3/16" magnetic nut driver does not have hollow shaft



647M

7-Piece Cushion-Grip Nut Driver Set — 6" Shafts

- Set contains 646-3/16, 646-1/4, 646-5/16, 646-11/32, 646-3/8, 646-7/16, and 646-1/2. (See individual tool listings for more details.)

Cat. No.	Weight (lbs.)
647	1.55



7-Piece Cushion-Grip Hollow-Shaft* Magnetic Tip Nut Driver Set — 6" Shafts

- Full hollow shaft for long bolts or studs, with magnetic tip.
- Set contains 646-3/16M, 646-1/4M, 646-5/16M, 646-11/32M, 646-3/8M, 646-7/16M, 646-1/2M. (See individual tool listings for more details.)

Cat. No.	Weight (lbs.)
647M	1.55


*3/16" magnetic nut driver does not have hollow shaft



All dimensions are in inches and (millimeters).

⚠WARNING: Always wear approved eye protection.

⚠WARNING: NOT insulated. Will NOT protect against electrical shock.



Cushion-Grip Nut Drivers

Cushion-Grip Stubby Nut Drivers — 1-1/2" Shafts

Additional Features:

- Full hollow shaft for long bolts or studs.
- Stubby nut drivers allow for work in close quarters.
- Meets or exceeds applicable ASME / ANSI specifications.



610-5/16

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
610-1/4	red	1/4"	1-1/2" (38 mm)	3-1/2" (89 mm)	.10
610-5/16	yellow	5/16"	1-1/2" (38 mm)	3-1/2" (89 mm)	.10

Cushion-Grip Hollow-Shaft Nut Drivers — 3" Shafts



Additional Features:

- Standard length for most applications.
- Fits over long bolts and studs.

630-1/2

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
630-3/16	black	3/16"	3" (76 mm)	6-3/4" (171 mm)	.20
630-1/4	red	1/4"	3" (76 mm)	6-3/4" (171 mm)	.20
630-5/16	yellow	5/16"	3" (76 mm)	6-3/4" (171 mm)	.20
630-11/32	green	11/32"	3" (76 mm)	6-3/4" (171 mm)	.20
630-3/8	blue	3/8"	3" (76 mm)	6-3/4" (171 mm)	.20
630-7/16	brown	7/16"	3" (76 mm)	7-5/16" (186 mm)	.25
630-1/2	red	1/2"	3" (76 mm)	7-5/16" (186 mm)	.25
630-9/16	orange	9/16"	4" (102 mm)	9-3/8" (238 mm)	.35
630-5/8	yellow	5/8"	4" (102 mm)	9-3/8" (238 mm)	.35

Refer to the insulated section for insulated nut drivers.

Metric Cushion-Grip Hollow-Shaft Nut Drivers — 3" Shafts



Additional Features:

- Standard length for most applications.
- Fits over long bolts and studs.

630-11mm

Cat. No.	Color Code	Hex Size Metric	Shaft Length	Overall Length	Weight (lbs.)
630-4mm	red	4 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-4.5mm	yellow	4.5 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-5mm	black	5 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-6mm	red	6 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-7mm	orange	7 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-8mm	yellow	8 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-10mm	blue	10 mm	3" (76 mm)	6-3/4" (171 mm)	.20
630-11mm	brown	11 mm	3" (76 mm)	7-5/16" (186 mm)	.20

Cushion-Grip Hollow-Shaft Nut Drivers — 6" Shafts

Additional Features:

- Reaches into deep recesses.
- Fits over extra-long bolts and studs.



646-1/2

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
646-3/16	black	3/16"	6" (152 mm)	9-3/4" (248 mm)	.25
646-1/4	red	1/4"	6" (152 mm)	9-3/4" (248 mm)	.25
646-5/16	yellow	5/16"	6" (152 mm)	9-3/4" (248 mm)	.25
646-11/32	green	11/32"	6" (152 mm)	9-3/4" (248 mm)	.25
646-3/8	blue	3/8"	6" (152 mm)	9-3/4" (248 mm)	.30

Cat. No.	Color Code	Hex Size	Shaft Length	Overall Length	Weight (lbs.)
646-7/16	brown	7/16"	6" (152 mm)	10-5/16" (262 mm)	.35
646-1/2	red	1/2"	6" (152 mm)	10-5/16" (262 mm)	.35
646-9/16	orange	9/16"	6" (152 mm)	11-3/8" (289 mm)	.40
646-5/8	yellow	5/8"	6" (152 mm)	11-3/8" (289 mm)	.40

All dimensions are in inches and (millimeters).

⚠WARNING: Always wear approved eye protection.

⚠WARNING: NOT insulated. Will NOT protect against electrical shock.

