


# Insulated Pliers – Classic

 1000 V

## Insulated Standard Long-Nose Pliers – Side-Cutting

### Additional Features:

- Induction hardened cutting knives for long life.
- Knurled jaws for sure wrapping and looping.
- Curved handles provide greater tool control.

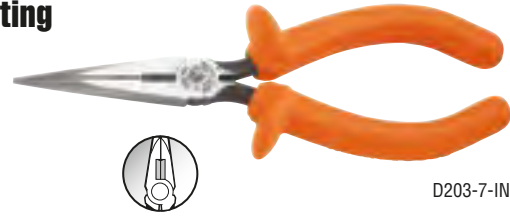

D203-7-INS

Cat. No.	Overall Length	Jaw Length	Jaw Width	Jaw Thickness	Knife Length	Point Thickness
D203-6-INS	6-7/8" (175 mm)	1-15/16" (49 mm)	11/16" (17 mm)	3/8" (10 mm)	1/2" (13 mm)	3/32" (2 mm)
D203-7-INS	7-3/8" (187 mm)	2-7/16" (62 mm)	11/16" (17 mm)	3/8" (10 mm)	1/2" (13 mm)	3/32" (2 mm)

## Insulated Pump Pliers

### Additional Features:

- Secure tongue and groove design for non-slip grip – even with heavy pressure.



D502-10-INS

Cat. No.	Overall Length	Max. Jaw Capacity
D502-10-INS	10-1/4" (260 mm)	1-3/4" (44 mm)

## Insulated Crimping/Cutting Tool – Classic

### Insulated Crimping/Cutting Tool

#### Additional Features:

- Tapered nose designed for working in confined spaces.
- Crimping dies marked for insulated and non-insulated solderless terminals and connectors.
- Accommodates wire from No. 10 to 22 AWG.
- Wire cutter in nose.



1005-INS

Cat. No.	Overall Length	Crimps
1005-INS	9-3/4" (248 mm)	10 to 22 AWG

## Insulated Cable Cutter – Classic

### Insulated High-Leverage Cable Cutter

#### Additional Features:

- Special, high-leverage design for exceptional cutting capability.
- Cable-gripping shear-type jaws.
- Precision, one-hand shearing action.
- Perfect for working in confined spaces.



63050-INS

Cat. No.	Overall Length	Cuts Up to
63050-INS	9-5/8" (245 mm)	4/0 aluminum, 2/0 soft copper, 100-pair 24 AWG communications cable

**⚠ WARNING:** Do NOT use to cut steel or ACSR.

All dimensions are in inches and (millimeters).

**⚠ WARNING:** Only use tools that are marked with the official international 1000-volt rating symbol shown below, if there is any chance that the tools will make contact with an energized source.



**⚠ WARNING:** Wear approved eye protection. Always inspect your tools before use. Do not use if orange coating cracks, breaks or becomes damaged. Destroy tool if white layer shows through orange layer.

**⚠ WARNING:** Do NOT use screwdrivers to pry or chisel.

**⚠ WARNING:** Do NOT touch uninsulated portion of the tool or any conductive object when either might contact an energized source.

**⚠ WARNING:** Whenever possible, always de-energize lines and equipment prior to working on or around them. Klein insulated tools are designed only to reduce the chance of injury where the tool may make contact with an energized source.

**⚠ WARNING:** Because moisture, films, or other surface contaminants are conductive, Klein insulated tools must be kept clean, dry, and free of any surface contaminants.

