



**Catalog No. MCL (.1 - 50A)**  
600 Volts AC or Less  
Fast-Acting

AMPERE RATINGS				
MCL 600V				
0.1	0.75	3.5	9	30
0.125	1	4	10	35
0.2	1.5	5	12	40
0.25	2	6	15	50
0.3	2.5	7	20	—
0.5	3	8	25	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.1 - 50	13/32	1-1/2

**MCL SPECIFICATIONS**  
Fast-Acting

**Voltage Rating:** MCL - 600VAC

**Ampere Rating:** .1 - 50 Amps

**Interrupting Rating:** 100K RMS Amps

**Agency Approvals:**  
(.1 - 30) UL Listed to 198G, File E162443  
(.1 - 30) CSA Cert. C22.2 Part 59.2, LR700489

- BENEFITS:**
- Compact dimensions.
  - High interrupting rating.
  - Fast-acting design responds quickly to both overloads and short-circuit current.

- APPLICATIONS:**
- Street lighting holders, HID lighting, control circuits, electronic equipment protection.

**RECOMMENDED FUSEBLOCKS:**  
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MCL	KTK	ATM	KLK



**Catalog No. MOL (.5 - 30A)**  
250 Volts AC or Less  
Fast-Acting

AMPERE RATINGS				
MOL 250V				
0.5	2.5	6	10	25
1	3	6.5	12	30
1.5	4	8	15	—
2	5	9	20	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.5 - 30	13/32	1-1/2

**MOL SPECIFICATIONS**  
Fast-Acting

**Voltage Rating:** MOL - 250VAC

**Ampere Rating:** .5 - 30 Amps

**Interrupting Rating:** 10K RMS Amps

**Agency Approvals:**  
(.5 - 30) UL Listed to 198G, File E162443  
(.5 - 30) CSA Cert. C22.2 Part 59.2, LR700489

- BENEFITS:**
- Compact dimensions.
  - Economical laminated paper tube design.

- APPLICATIONS:**
- Supplemental protection for non-inductive control and lighting circuits.

**RECOMMENDED FUSEBLOCKS:**  
Refer to page 142 in this catalog.

CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
MOL	BAF	OTM	BLF



**Catalog No. EBS (.2 - 10A)**  
.2 - 5A 600 Volts AC or Less  
6 - 10A 250 Volts AC or Less  
Fast-Acting

AMPERE RATINGS				
EBS (AMP)				
0.2	0.8	1.8	5	10
0.4	1	2	6	—
0.5	1.5	3	7	—
0.75	1.6	4	8	—

DIMENSIONS		
Amps	Ferrule (in)	Length (in)
.2 - 10	13/32	1-3/8

**EBS SPECIFICATIONS**  
Fast-Acting

**Voltage Rating:** .2-5 Amps; 600VAC  
5-10 Amps; 250VAC

**Ampere Rating:** .2 - 10 Amps

**Interrupting Rating:** 10K RMS Amps

**Agency Approvals:**  
UL Listed to 198G, File E162443  
CSA Cert. C22.2 Part 59.2, LR700489


- BENEFITS:**
- Compact dimensions.
  - Shorter than standard midget dimensions.
  - Economical design.

- APPLICATIONS:**
- Supplemental protection for non-inductive control and lighting circuits.


CROSS REFERENCE			
EDISON	BUSS	GOULD	LF
EBS	BBS	None	BLS

**AVERAGE TIME/CURRENT CURVE**

**Cat. No. MCL (Amp) 600V**

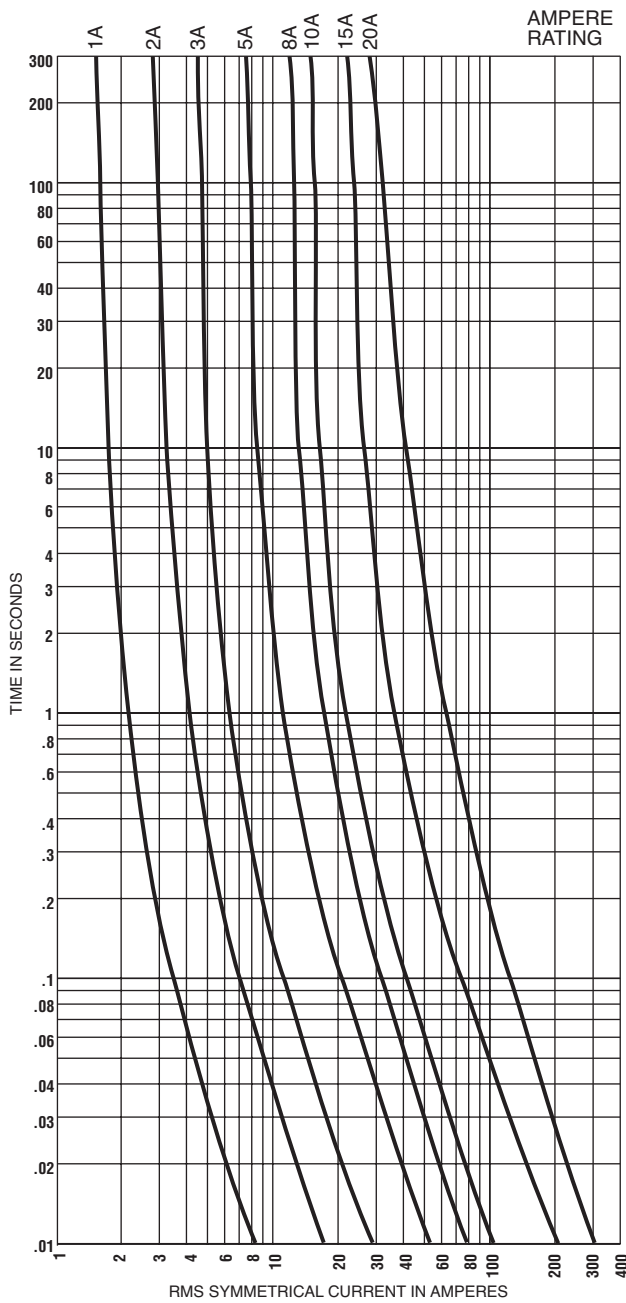

**Cat. No. MOL (Amp) 250V**

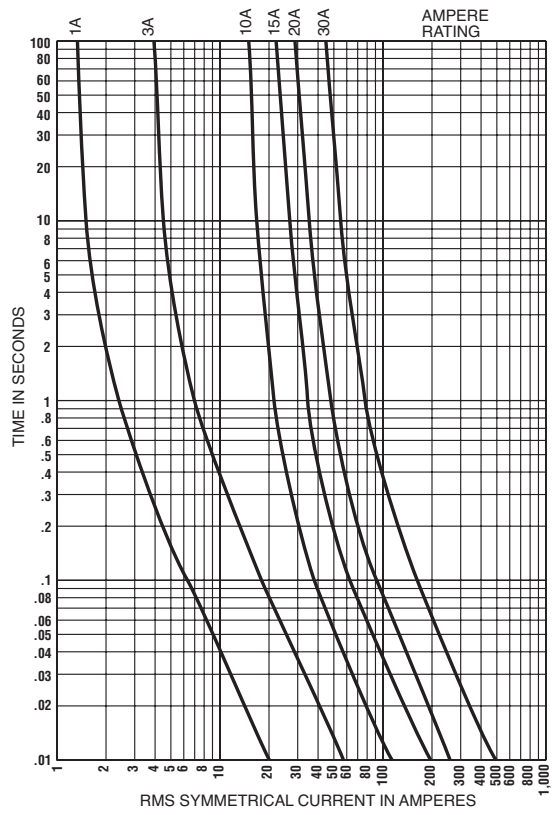

**Cat. No. EBS (Amp) 600V**

