







MDC (M12) Series Receptacles

2, 3, 4 & 5 Conductor MDC Series Receptacles, 18/22AWG



Front Mount Receptacles | 1/2"-14 NPT Threads | 300 Volt, 4 amps | IP69 Rating



# of Poles	Male Faceview	Color Code	Rating	Wire AWG	Aluminum		Stainless Steel	
					Male Receptacles	Female Receptacles	Male Receptacles	Female Receptacles
2		3. Brown 4. Blue	300V 4A	18 AWG	MDC-2MR-2-18	MDC-2FR-2-18	MDC-2MR-2-18-SS	MDC-2FR-2-18-SS
				22 AWG	MDC-2MR-2	MDC-2FR-2	MDC-2MR-2-SS	MDC-2FR-2-SS
3		1. Brown 3. Blue 4. Black	300V 4A	18 AWG	MDC-3MR-2-18	MDC-3FR-2-18	MDC-3MR-2-18-SS	MDC-3FR-2-18-SS
				22 AWG	MDC-3MR-2	MDC-3FR-2	MDC-3MR-2-SS	MDC-3FR-2-SS
4		1. Brown 2. White 3. Blue 4. Black	300V 4A	18 AWG	MDC-4MR-2-18	MDC-4FR-2-18	MDC-4MR-2-18-SS	MDC-4FR-2-18-SS
				22 AWG	MDC-4MR-2	MDC-4FR-2	MDC-4MR-2-SS	MDC-4FR-2-SS
5		1. Brown 2. White 3. Blue 4. Black 5. Gray	300V 4A	18 AWG	MDC-5MR-2-18	MDC-5FR-2-18	MDC-5MR-2-18-SS	MDC-5FR-2-18-SS
				22 AWG	MDC-5MR-2	MDC-5FR-2	MDC-5MR-2-SS	MDC-5FR-2-SS


H
Micro-DC (M12) Series Receptacles

12" leads are standard. Longer lead lengths are available, please consult the factory for part numbers.
Use the suffix "-G" to include lock nut and O-ring on receptacles with standard 12" leads or shorter. (e.g. MDC-2MR-2 becomes MDC-2MR-2-G)
O-ring and lock nut are included on lead lengths of 15" or longer.

Specifications:

Shell: Clear Anodized Aluminum/Stainless Steel
 Insulator: Polyamide
 Wire: 18 & 22 AWG: 300V, UL Style 1007/1569
 Contacts: Copper Alloy with Gold Plating
 O-Ring: NBR
 Lock Nut: Zinc Plated Steel
 Temperature: -40°C to 105°C (-40°F to +221°F)

1/2" NPT Male Receptacle

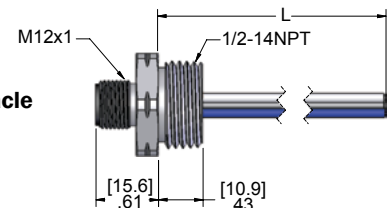

1/2" NPT Female Receptacle

